

IES-22812F-PU

12 100FX + 8 10/100TX + 2 1000 SFP

Industrial Power Station L2 Plus Managed Switch

- High-density Ethernet hardened switch for power utility
- X-Ring provides ring recovery time of less than 10ms
- Wide operating temperature range from -40°C to 85°C



OVERVIEW

Lantech IES-22812F-PU Industrial power utility SNMP switch is a high-density Ethernet Hardened Switch for power utility, renewable power, and substation application, offering 100V-240V VAC/VDC redundant power input to increase the reliability of network.

Lantech IES-22812F-PU features high reliability and robustness compliant with IEC-61850 & IEEE 1613 withstanding extensive EMI/RFI phenomenon, lighting surge, inductive load switching, high ESD, high fault current environment usually find in Power substation. Widely operational temperature capacity (-40°C ~85°C) ensures IES-22812F-PU runtime during the harsh environment. It also supports 6000VDC ESD and 3000VDC EFT protection.


Lantech IES-22812F-PU builds in all the important software features required in large network like DHCP Option 82 (Relay agent), 256 Policy ACL for security, IGMP Query / Snooping and RSTP. The highly integrated Fast Ethernet switch is designed with multiple 100M Fiber to be interconnecting with Gigabit backbone in core network.

IES-22812F-PU Pro-Ring proprietary recovery protocol can resume network link down in less than 10ms time. It supports Couple Ring which can secure two X-Ring groups connection without failure. Dual Homing can redundantly back up the X-Ring groups to the upper layer core switch via RSTP. With X-Ring, Couple Ring and Dual Homing, IES-22812F-PU offers network non-stop reliability in connection with other Lantech industrial edge switches

FEATURES & BENEFITS

- **System Interface/Performance**
 - Back-plane (Switching Fabric): 8.8Gbps
 - 8K MAC Address Table
 - Redundant Power Supply Design for AC or DC
- **VLAN**
 - Port Based VLAN
 - Support 802.1 Q Tag VLAN
 - GVRP
- **Port Trunk with LACP**
- **QoS (Quality of Service)**
 - Support IEEE 802.1p Class of Service,
 - Per port provides 4 priority queues
 - Port-base, Tag-base and TOS Priority
- **Security**
 - Port Security: MAC address entries/ filter
 - IP Security: IP address security management to prevent unauthorized intruder.
 - Login Security: IEEE 802.1X/ RADIUS
- **IGMP with Query mode for Multi Media Application**
- **Provides EFT protection 3000 VDC for power line**
- **Supports 6000 VDC Ethernet ESD protection**
- **Pro-Ring**
 - Covers X-Ring, Dual Homing, Central Ring and Couple Ring Topology
 - Provides redundant backup feature and the recovery time below 10ms for up to 250 switches in a ring
- **Supports up to 256 Policy base ACL**
- **Support IEEE802.1ab LLDP****
- **Bandwidth Control**
 - Ingress Packet Filter and Egress Rate Limit
 - Broadcast/Multicast Packet Filter Control
- **System Event Log**
 - System Log Server/Client
 - SMTP e-mail Alert
 - Relay Alarm Output System Events Security
- **SNMP Trap**
 - Device cold start
 - Power status
 - Authentication failure
 - Port Link up/Link down
- **TFTP Firmware Update and System Configure Restore and Backup**

DIMENSIONS (unit=mm)

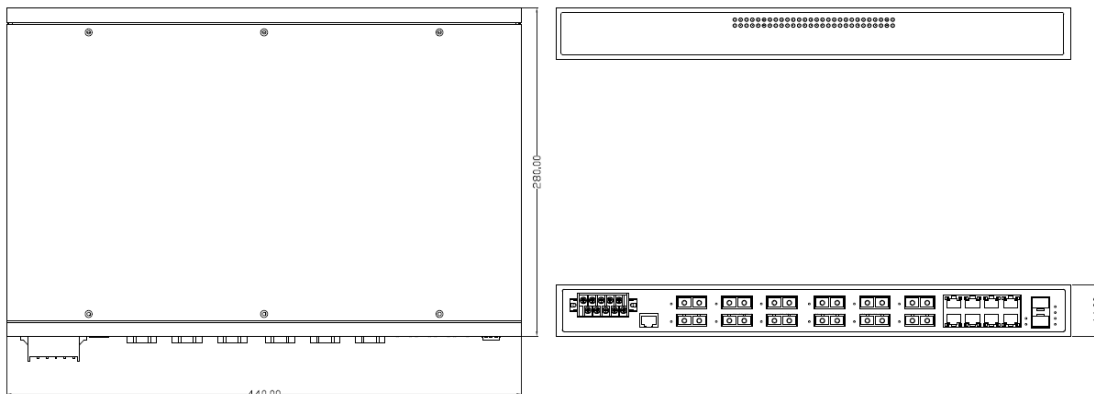

SPECIFICATION

Hardware Specification		Software Specification	
IEEE Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX / 100Base-FX IEEE 802.3z Gigabit fiber IEEE 802.3ab 1000Base-T IEEE 802.3x Flow Control and Back Pressure IEEE 802.3ad Port trunk with LACP IEEE 802.1d Spanning Tree IEEE 802.1w Rapid Spanning Tree IEEE 802.1p Class of Service IEEE 802.1Q VLAN Tag IEEE 802.1x User Authentication (Radius) IEEE 802.1ab LLDP**	Humidity	
Switch Architecture	Back-plane (Switching Fabric): 8Gbps Packet throughput ability(Full-Duplex): 5.9Mpps@64bytes	Operating Temperature	Standard: -40°C ~85°C
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port	Storage Temperature	-40°C ~85°C
MAC Address	8K MAC address table	EMI	FCC Class A, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN-61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8, CE EN61000-4-11, CE EN61000-4-12, CE EN61000-6-2, CE EN61000-6-4
Jumbo frame	9K (for Gigabit Ports)	Safety	CE/EN60950-1
Connectors	SC (Multi-mode): 50/125um~62.5/125um SC (Single-mode): 9/125um Available distance: 2km (Multi-mode)/ 30km(Single-mode) Wavelength: 1310nm (Multi-mode/Single-mode) 10/100TX: 1 x RJ-45 with auto MDI/MDI-X function Mini-GBIC: 2 x SFP sockets	Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration), KEMA 61850-3, IEEE1613, Zero packet loss(240~480V) IEC60870-2-2, IEC60068-2-30
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)	Warranty	5 years
Protocol	CSMA/CD	Software Specification	
LED	Per unit: Power 1 (Green), Power 2 (Green), Alarm (Red) Link/Activity (Green), Full duplex/collision(Yellow), MINI GBIC (Link/Activity)(Green)	Management	SNMP v1 v2c, v3/ Web/ Telnet/ CLI Management
Power Supply	2 X VAC/VDC 100V~240V Redundancy	SNMP MIB	RFC 3418 SNMP MIB RFC 1213 MIBII RFC 2011 MIB RFC 1493 Bridge MIB RFC 2674 VLAN MIB RFC 1215 Trap MIB RFC 1643 Ethernet like RFC 1757, RSTP MIB RMON1(1,2,3,9) LLDP MIB**, Private MIB
Power Consumption	23 W@VDC, 27W@VAC	VLAN	Port based VLAN, up to 24 groups IEEE802.1Q Tag VLAN Static VLAN groups up to 256, Dynamic VLAN group up to 2048, VLAN ID from 1 to 4096. GVRP up to 256 groups.
Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V	Port Trunk with LACP	LACP Port Trunk: 13 Trunk groups/Maximum 4 trunk members
Case Dimension	19" Metal case,IP-30; 440mm(W)x280mm(D)x44mm(H)	LLDP**	Support LLDP to allow switch to advise its identification and capability on the LAN
Operating	5%~95% (Non-condensing)	Pro-Ring	Support X-Ring, Dual Homing, and Couple Ring Provide redundant backup feature and the recovery time below 10ms
		Spanning Tree	Support IEEE802.1d Spanning Tree,IEEE802.1w Rapid Spanning Tree
		Quality of Service	The quality of service determined by port, Tag andIPv4 Type of service, IPv4 Different Service

Industrial Managed Switches

Class of Service	Support IEEE802.1p class of service, per port provides 4 priority queues	System Log	Support System log record and remote system log server
Port Security	Support 50 entries of MAC address for static MAC and another 50 for MAC filter	SMTP	Support 1 SMTP Server and 6 e-mail accounts for receiving event alert
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"	SNMP Trap	Up to 3 Trap stations Cold start, Port link up, Port link down, Authentication Failure, Private Trap for power status
IGMP	Support IGMP snooping v1,v2 256 multicast groups and IGMP query	DHCP	Provide DHCP Client/ DHCP Server/ IP Relay Functions
IP Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.	DHCP Option 82/ DHCP Snooping*	DHCP Option 82(Relay agent) / DHCP Snooping*
Login Security	Support IEEE802.1X Authentication/RADIUS	DNS	Provide DNS client feature and support Primary and Secondary DNS server
Access Control List (ACL)	Support up to 256 Policy	SNTP	Support SNTP to synchronize system clock in Internet
Bandwidth Control	Support ingress packet filter and egress packet limit The egress rate control supports all of packet type and the limit rates are 0~100Mbps Ingress filter packet type combination rules are Broadcast/Multicast/Unknown Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all of packet. The packet filter rate can be set from 0 to 100Mbps	Firmware Update	Support TFTP firmware update
Flow Control	Support Flow Control for Full-duplex and Back Pressure for Half-duplex	Configuration backup and restore	Support TFTP backup and restore

*Future Release
**Optional

ORDERING INFORMATION

- **IES-22812F-PUP/N: 8360-320**
12 100FX SC MM + 8 10/100TX + 2 1000SFP
Industrial Power Station L2 Plus Managed Switch: -40 °C to 85°C.
- **IES-22812F-PUP/N: 8360-321**
12 100FX SC SM 30KM + 8 10/100TX + 2 1000SFP
Industrial Power Station L2 Plus Managed Switch: -40 °C to 85°C.

OPTIONAL ACCESSORIES

Mini GBIC (SFP)

- | | |
|--|--|
| ■ 8330-162 MINI GBIC 1000SX (LC/0.5km) Transceiver | ■ 8330-061 100Base LX 30KM, Single-mode, LC Transceiver |
| ■ 8330-163 MINI GBIC 1000SX2 (LC/2km) Transceiver | ■ 8330-188 LTSFP-1000BX-10KM Transceiver (WDM 1310) |
| ■ 8330-165 MINI GBIC 1000LX (LC/10km) Transceiver | ■ 8330-189 LTSFP-1000BX-10KM Transceiver (WDM 1550) |
| ■ 8340-0591 MINI GBIC 1000LHX (LC/40km) Transceiver | ■ 8330-186 LTSFP-1000BX-20KM Transceiver (WDM 1310) |
| ■ 8330-166 MINI GBIC 1000XD (LC/50km) Transceiver | ■ 8330-187 LTSFP-1000BX-20KM Transceiver (WDM 1550) |
| ■ 8330-169 MINI GBIC 1000XD (LC/60km) Transceiver | ■ 8330-180 LTSFP-1000BX-40KM Transceiver (WDM 1310) |
| ■ 8330-167 MINI GBIC 1000ZX (LC/80km) Transceiver | ■ 8330-182 LTSFP-1000BX-40KM Transceiver (WDM 1550) |
| ■ 8330-170 MINI GBIC 1000EZ (120km) Transceiver | ■ 8330-181 LTSFP-1000BX-60KM Transceiver (WDM 1310) |
| ■ 8330-168 MINI GBIC 10/100/1000T (100m) Transceiver | ■ 8330-183 LTSFP-1000BX-60KM Transceiver (WDM 1550) |
| ■ 8330-060 100Base FX 2KM, Multi-mode, LC Transceiver | ■ 8330-184 LTSFP-1000BX-80KM Transceiver (WDM 1490) |
| ■ 8330-065 100Base FX 5KM, Multi-mode, LC Transceiver | ■ 8330-185 LTSFP-1000BX-80KM Transceiver (WDM 1550) |

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2010 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.