

IES-0008B

8 10/100TX Industrial Ethernet Unmanaged Switch; 12V input model

- Dual 9V~60VDC input(12V model) compliant with ISO 7637-2
- Galvanic isolation protection (power input /Ethernet port to case ground; power input to Ethernet port)
- Relay alarm output for power fail and alarm
- E-marking certificate for vehicle application (-12V model)



OVERVIEW

Lantech IES-0008B is a high performance all 8 10/100TX industrial Ethernet switch.

Galvanic isolation for dual 12V wide input range

The IES-0008B-12V accepts power input 9~60VDC and is compliant with ISO 7637-2 which protects switch from being damaged by high voltage that could be found at vehicle cranky start.

E-marking certificate (-12V model), High reliability and extended working temperature

Lantech IES-0008B provides $\pm 2000V$ EFT and $\pm 6000V$ ESD protection, which can reduce unstable situation caused by

power line and Ethernet. It has high reliability and robustness coping with extensive EM/RFI phenomenon, environmental vibration and shocks usually found in Automation, transportation, Wireless backhaul, Semi-conductor factory and assembly lines.

The -E model can be used in extreme environments with an operating temperature range of $-40^{\circ}C$ to $75^{\circ}C$.


The E-marking certificate makes it the most suitable switch for bus, carriage, other vehicles application as well as for industrial areas. (-12V model)

FEATURES & BENEFITS


- 8 10/100TX industrial Ethernet switch (Total 8 Ports Switch)
- Dual 9V~60VDC power input for 12V model with ISO7637-2 compliance
- Back-plane (Switching Fabric): 1.6Gbps
- Provides EFT protection ± 2000 VDC for power line.
- Supports ± 6000 VDC Ethernet ESD protection
- Galvanic isolation between power input and case ground; between Ethernet port and case ground; between power input and Ethernet port
- E-marking certificate for vehicle application (-12V model)
- Relay alarm output for power fail and alarm
- IP30 & IP40 metal housing with DIN rail and Wall-mount** design

DIMENSIONS (unit=mm)

IP30 model

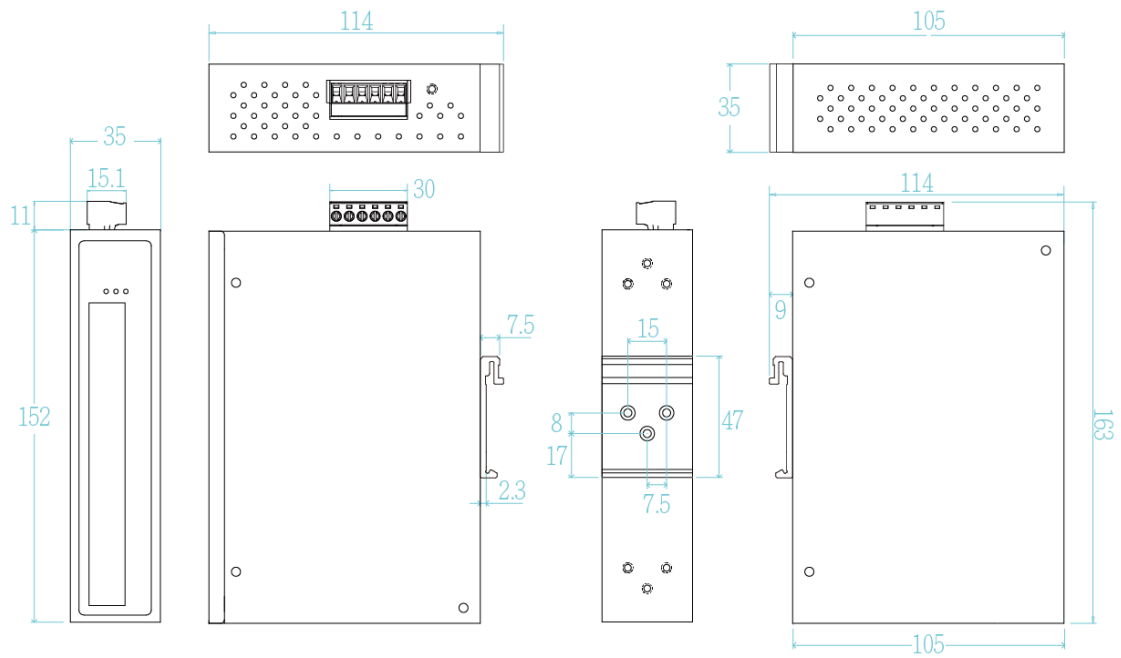

IP40 model

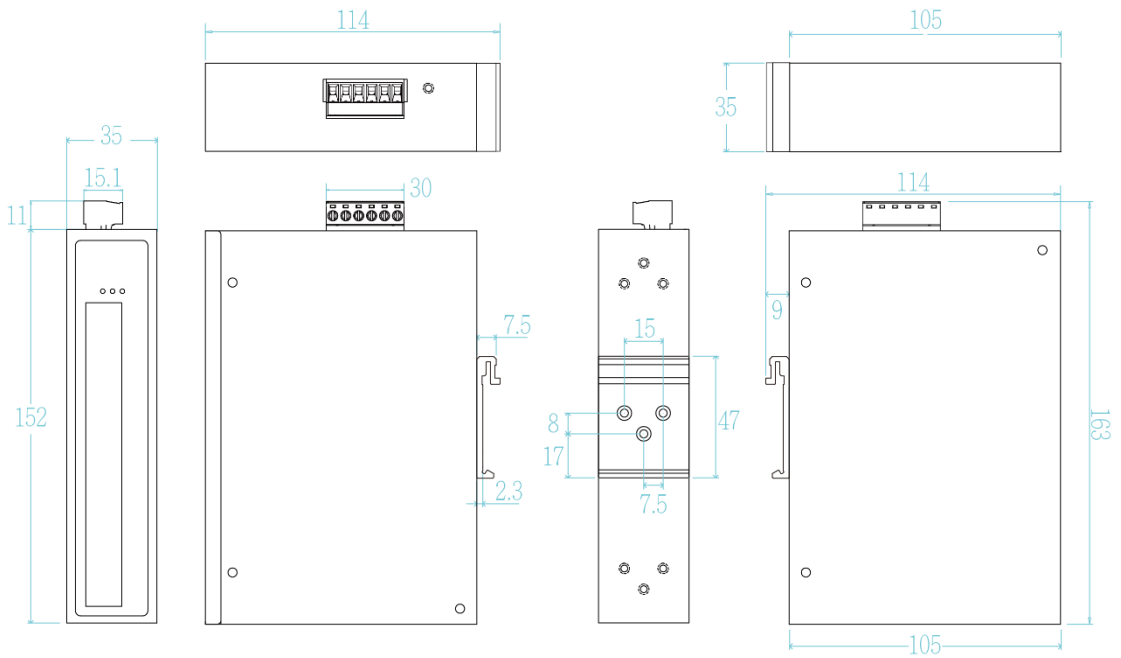

SPECIFICATION

Hardware Specification		
Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3x Flow Control and Back Pressure	Power & P-Fail connector: 1 x 6-pole terminal block
Switch Architecture	Back-plane (Switching Fabric): 1.6Gbps	Network Cable
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)
Mac Address	16K MAC address table	LED
Connectors	10/100TX: 8 x ports RJ-45 with Auto MDI/MDI-X function	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red); Ethernet port: Link/Activity (Green)
		Operating Humidity
		Operating
		5% ~ 95% (Non-condensing)
		-20°C~60°C / -4°F~140°F (Standard model)

Temperature	-40°C~75°C / -40°F~167°F(-E model)		CE EN55032, CE EN55024,
Storage Temperature	-40°C~85°C / -40°F~185°F		CE EN61000-4-2, CE EN61000-4-3,
Power Supply	9V~60VDC(12V model)		CE EN61000-4-4, CE EN61000-4-5,
Power Consumption	5W		CE EN61000-4-6, CE EN61000-4-8,
Galvanic Isolation	Between power input and case ground Between Ethernet port and case ground Between power input and Ethernet port	Safety	CE EN61000-6-2
Case Dimension	Metal case. IP-30 & IP40 43 (W) x 105 (D) x 152 (H) mm	Stability Testing	EN62368 (LVD)
Weight	900 g	Vehicle certificate	IEC 60068-2-27 (Shock), IEC 60068-2-31 (Shock), IEC 60068-2-32 (Free fall), IEC 60068-2-64 (Vibration), IEC 60068-2-80 (Vibration)
Installation	DIN Rail and Wall Mount** Design	MTBF	E13 marking (-12V model)
Relay Alarm	Provides one relay output for power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V	Warranty	NA
EMI & EMS	FCC Class A,		5 years

*Future Release
**Optional

ORDERING INFORMATION

- **IES-0008B-12V.....P/N: 8351-118**
8 10/100TX Industrial Ethernet Switch, dual 9V~60VDC input; compliant with ISO7637-2; -20°C to 60°C
 - **IES-0008B-12V-E.....P/N: 8351-119**
8 10/100TX Industrial Ethernet Switch, dual 9V~60VDC input, compliant with ISO7637-2; -40°C to 75°C
 - **IES-0008B-40-12V.....P/N: 8351-120**
8 10/100TX IP40 Industrial Ethernet Switch, dual 9V~60VDC input; compliant with ISO7637-2; -20°C to 60°C
 - **IES-0008B-40-12V-E.....P/N: 8351-121**
8 10/100TX IP40 Industrial Ethernet Switch, dual 9V~60VDC input, compliant with ISO7637-2; -40°C to 75°C
- All part no. with WALL are models with wall mount kit instead of DIN Rail

OPTIONAL ACCESSORIES

DIN Rail Power

- **MDR-40 Series** 40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from 60°C ~ 70°C)
- **MDR-20 Series** 20W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2020 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.