

IMR-3002

Industrial Multifunction VPN Router w/up to 2 LTE 4G + 2 serial ports + 2 Gigabit Ethernet (incl.1 PD) w/Load Balancing, VPN, Protocol Gateway, Storage**; 24V input

- Up to 2 concurrent modems for 3G/4G LTE Link & GPS(2L model/4 SIMs)
- Built-in 2 Gigabit Ethernet ports (1LAN+1WAN or 2LAN) (incl. 1PD)
- Support LTE Cat 6 (APAC & EUNA models) or Cat 12/9/13 (WW model)
- VPN router for Multi-site VPN, OpenVPN, L2TP over IPsec, IPsec, L2 over GRE, IPGRE
- Optional EMMC Flash storage on-board**
- Load Balancing built-in 5 mechanism
- Support NAT and Firewall
- Support Modbus gateway
- Support 2 RS422/RS485 ports or 2x RS232 ports
- Dual Input voltage 9~56VDC (24V model)
- Vehicle E-marking** certificate (M12 model)
- LTE graphic signal strength
- Editable login page of captive portal for hot-spot application
- ITxPT design w/ ignition function**
- Optional eSIM chip enables router with versatile data plans**
- USB port to backup, restore the configuration file and upgrade firmware; Dual image firmware
- EN50155/61373/45545 verification for railway application (except 24V-IGN model)



RJ45 model



M12 model



OVERVIEW

Lantech IMR-3002 series is a next generation industrial multi-function VPN router w/ up to 2x LTE modem + 2x Gigabit Ethernet (incl.1 PD) + 2 serial ports that supports advanced function of VPN, Load-Balancing, EMMC Flash Storage**, Protocol gateway(Modbus), and LTE quad SIM fail-over for industrial applications. The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

Dual concurrent LTE design 4G/3G for load-balancing

With dual LTE module design (2L model), 4 SIM card slots, IMR-3002 can allow auto-swap, failover & failback between multiple service providers for real non-stop connection. With concurrent LTE modules, it can also allocate bandwidth by “ Load Balancing with 8 schemes between multiple WANs.

With one mobile LTE module, 2 SIM card slots, IMR-3002 provides redundant link between two service providers.

Both GPS and Russian GLONASS systems are supported.

Optional EMMC Flash storage**

The optional EMMC flash storage on router can offer 8G/16G/32G capacity.

Load Balancing with 5 mechanisms for multi-WANs

IMR-3002 supports Load Balancing for LTE/WAN connections. There are five schemes for Load Balancing function:

Pack	Algorithm	Description
Basic	Fixed	Manually route by traffic type through fixed WAN link.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.

Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
--------------	---

2 port serial connection, Modbus gateway

It builds in 2 port serial connection for RS232, RS422, RS485.

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

VPN and firewall

Besides traditional VPN peer to peer tunneling, IMR-3002 support latest Multi-Site VPN function that is an efficient way for mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, OpenVPN, L2TP over IPsec, IPsec, L2 over GRE, IPGRE, and NAT for various VPN applications.

The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP / UDP port number.

Email notice; Event log; Remote Web control

In case of events, the IMR-3002 will immediately send email and trap.

When the router is at remote area with limited access, Web control can help to get router status or remotely reboot.

Built-in 2 port Gigabit Ethernet

Two port Gigabit Ethernet can be supported as 1LAN+1WAN or 2LAN models.

USB port for back up, restore configuration and upgrade firmware; Dual image firmware

The built-in USB port can upload/download the configuration through USB dongle for router replacement.

It supports dual-image firmware to choose which one to start.

Ignition Sensing*

Ignition sense allows you to delay power off the router with a designated time delay.

24V input voltage selection: dual 9V-56VDC (24V model)

The IMR-3002 is able to work from 9VDC to 56VDC (24V model).

Optional eSIM**

By replacing physical SIM, optional eSIM chip will allow users to purchase data plans at low prices from local carriers in the world.

Ruggedized industrial design and FCC, CE certificate

The IMR-3002 is designed to meet with outdoor network environment with IP30 (IP43 for M12 model) housing. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards. With CE & FCC radio certification for LTE, the IMR-3002 is best for outdoor community, vehicle, and process control automation applications.

For more usage flexibilities, IMR-3003 supports wide operating temperature from -40°C to 65°C.

EN50155, EN61373 verification; E-marking certification; ITxPT** design**

The IMR-3002 series is also applicable for railway on-board/track side, vehicle and mining applications for more usage flexibilities. The series is verified with EN50155, EN61373, and EN45545 for railway applications (Except 24V-IGN model). The E-marking certificate (24V model) and ITxPT design (24V-IGN model).

FEATURES & BENEFITS

- Built-in two Gigabit ports and 1LAN+1WAN or 2LAN (incl.1 PD)
- HTTP/HTTPS/Telnet/SSH & Administration access
- Radius Authentication, EAP-TLS, EAP-TTLS, PEAP
- Support IPv6 & IPv4 protocol
- Support Multi-Site VPN for mesh tunneling as well as Open VPN, L2TP over IPsec, IPsec, L2 over GRE , IPGRE and NAT for secured network connection
- The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP/UDP port number
- NAT/DMZ/Port Forwarding
- Support SNMP v1/v2c/v3
- EMMC-FLASH storage**8/16/32G
- eSIM** to allow data-plan globally
- Dual concurrent LTE 4G/3G design (2L model)for auto-swap/failover/failback between multiple ISPs for

- continuous service (four SIM card slots)
- One LTE 4G/3G w/ 2 SIM card design(1L model) for mobile redundancy
- GPS & GLONASS connection
- Load Balancing supports 5 mechanism between multiple WANs

Pack	Algorithm	Description
Basic	Fixed	Manually route by traffic type through fixed WAN link.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.


Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.

- Built-in 2 x serial ports(RS232/RS422/RS485)
- Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP
- Event alerting by Syslog, SNMP Trap, Email, Relay ; Permanent local log rotation / Maxi 1K records
- Remote Web control to get status or re-boot by Web
- Built-in RTC to keep track of time always
- Support SNTP to synchronize system clock


- Support LLDP discovery protocol
- Support DHCP Server and Client
- Reset button for factory default mode
- Graphic LTE signal strength
- Firmware upgradeable through TFTP/HTTP
- Configuration backup and restoration
 - Supports text configuration file for system quick installation
 - USB port to upload/download configuration by USB dongle
- IP 30 housing for industrial environment
- DIN-Rail and Wall-mount** installation
- Operation temperature -40~65°C
- ITxPT design w/ ignition function**
- EN50155 & EN61373 verification (Except 24V-IGN model)
- Wide range input voltage from 9V-56V

DIMENSIONS (unit=mm)

24V model

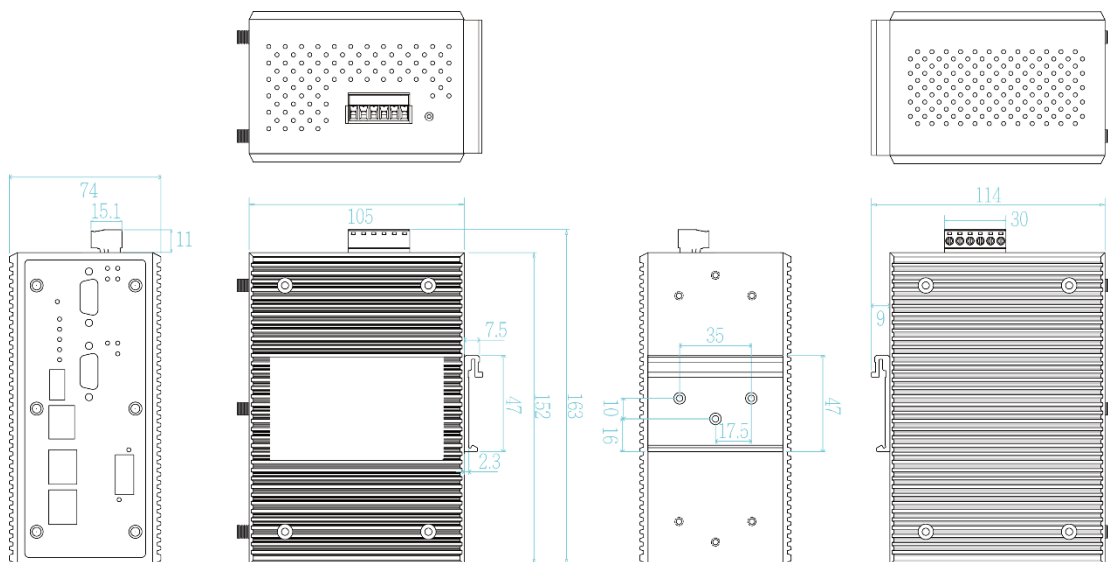

M12 Model

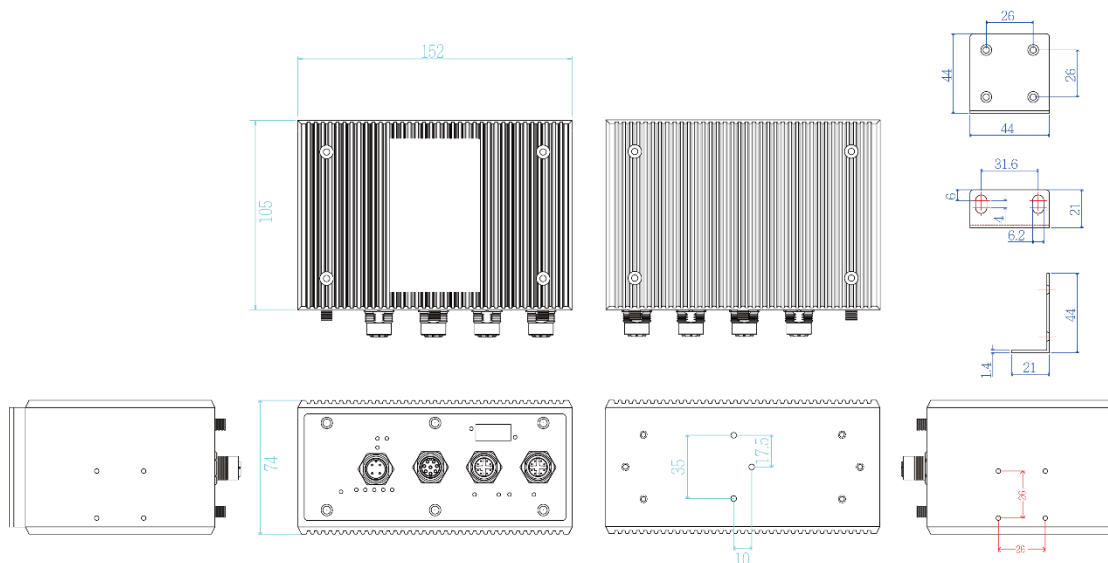

SPECIFICATION

Location Solutions	GPS, Glonass (EU/Americas) GPS, Glonass, Beidou, Galileo (APAC model only)	Management	SNMP v1,v2c,v3/ Web/Telnet/CLI
Band Options	Asia-Pacific (APAC model) LTE = B1, B3, B5, B7, B8, B18, B19, B21, B28, B38 (TDD), B39 (TDD), B40 (TDD), B41 (TDD) DC-HSPA+/ HSPA+/ HSPA/ UMTS = B1, B5, B6, B8, B9, B19 Europe & North America (EUNA model) LTE = B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41 (TDD) DC-HSPA+/ HSPA+/ HSPA/ UMTS = B1, B2, B3, B4, B5, B8 World Wide (WW model) LTE = B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41 (TDD), B42 (TDD), B43 (TDD), B46 (TDD), B48 (TDD), B66 WCDMA = B1, B2, B3, B4, B5, B6, B8, B9, B19	Load Balancing	5 schemes for multiple WAN
Data Rates – LTE	Asia-Pacific (APAC model) Downlink (Cat 6): FDD: 300 Mbps TDD: 222 Mbps Uplink (Cat 6): FDD: 50 Mbps TDD: 26 Mbps Europe & North America (EUNA model) Downlink (Cat 6): FDD: 300 Mbps TDD: 222 Mbps Uplink (Cat 6): FDD: 50 Mbps TDD: 26 Mbps World Wide (WW model) Downlink: Cat 12: 600 Mbps Cat 9: 450 Mbps Uplink: Cat 13: 150 Mbps	Basic	
Software		Fixed	Manually route by traffic type through fixed WAN link.
IPv6/4	Present	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link failure occurs.
Login Security	Supports IEEE802.1x Authentication/RADIUS	Priority	Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs.
Access Security	HTTP/HTTPS/Telnet/SSH & Administration; SNMP v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3)	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights
Protocol	PPPoE Client, DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ; NAT, SNTP, Firewall(Firewall(DDoS; IP address filter / Mac address filter / TCP/UDP port name),VRRP, DDNS	Custom Route	Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.
		Security	SSH/SSL/HTTPS
		Timer	Built-in Real Time Clock to keep track of time always(RTC)
		Discovery	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
		SNMP trap	Device cold / warm start Port link up / link down
		Graphic signal display	Graphic LTE signal strength & TX / RX rate display
		Remote Web control	To reboot or get status of router by WebUI
		Maintenance	Firmware upgradeable through TFTP/HTTP
		Configuration backup & restore	Supports text configuration file for quick system installation USB port to upload/download configuration by USB dongle
		Physical Ports & System	
		Connectors	10/100/1000T: 2x ports RJ 45 with Auto MDI/MDI-X function n (2 x10/100/1000T; 8 pin X coded-M12 model) (one port PD) (one port PD) USB x 1 RS-232 connector: 1 x RJ 45 Serial connector : 2 or 4 DB9 SIM card slots : 4(2L) or 2(1L) 2L model SMA connector for LTE: 4 (female) SMA connector for GPS: 2 (female) 1L model SMA connector for LTE: 2 (female) SMA connector for GPS: 1 (female) Power & P-Fail connector: 1 x 6-pole terminal block (M12, 5-pole A-coded, Male – M12 model)
		Serial Baud Rate	1000Kbps high data rate,250kbps normal for RS232 ;

	20Mbps high data rate,250kbps normal for RS422/485		EN 55032: 2015, EN 55024: 2015 IEC 61000-6-2, IEC 61000-6-4 BS EN55032, BS EN55024
Serial Data Bits	5, 6, 7, 8		
Serial Parity	odd, even, none, mark, space		
Serial Stop Bits	1, 1.5, 2		
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND		
RS-422	Tx+,Tx-, Rx+, Rx-,GND	EMS	IEC 61000-4-2 (ESD), IEC 61000-4-3 (RS), IEC 61000-4-4 (EFT), IEC 61000-4-5 (Surge), IEC 61000-4-6 (CS), IEC 61000-4-8 (PFMF) BS EN61000-4-2, BS EN61000-4-3, BS EN61000-4-4, BS EN61000-4-5, BS EN61000-4-6, BS EN61000-4-8,
RS-485 (2-wire)	Data+, Data-,GND		
EMMC Storage**	8/16/32 GB		
Isolation protection	Input power to I/O: 1.5KV isolation Input power to Ethernet 1.5KV isolation		
LED Indicators			
Power & System indicator	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) , Storage(Green), Serial1/Serial2(Green),Ready(Green)		
10/100/1000Base-T(X) port indicator	Link/Activity (Green), Speed (1000T: Yellow; 10/100TX: off)		
SIM	Green for Link/Act		
GPS	Green for Link/Act	Radio Frequency	EN 301 489-1, EN 301 489-17, EN 301 489-19, EN 301 489-52, EN 301 908-1**, EN 303 413, EN 62311
WLAN LEDs	Link /ACT : Green		
Fault	Red: Ethernet link down or power down		
Fault contact			
Relay	Relay output to carry capacity of 1A at 24VDC		
Power			
Input power	Dual DC input, 9~56VDC (24V model)		
Power consumption (Typ.)	20 Watts	Stability Testing	IEC 60068-2-27 (Shock) IEC 60068-2-31 (Shock) IEC 60068-2-64 (Vibration) IEC 60068-2-80 (Vibration)
Physical Characteristic			
Enclosure	IP 30 Metal case IP43 Metal case (M12 model)	Vehicle Certificate (24V model)	E13 marking** (UN ECE R10)
Dimension	74 (W) x 114 (D) x 152 (H) mm(24V model)	Vehicle Compliance (24V model)	UN ECE R118, ITxPT design** (ITxPT design is IGN model only)
Weight	900g	Railway Compliance (Except -IGN model)	EN50155 EN61373 EN45545 IEC 60571
Environmental			
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)	MTBF	1,161,227hrs (standards: IEC 62380)
Operating Temperature	-40°C ~65°C (-40°F ~ 149°F)	Warranty	5 years
Operating Humidity	5% to 95% Non-condensing		
Regulatory approvals			
Safety	EN 62368-1		
EMC	FCC Part 15B Class A, ICES-003 ISSUE7,		

*Future Release

**Optional

ORDERING INFORMATION

M12 models are available with -M12 model names (-2S/-4S/-2SA/-2SB/-2S2SA/-2S2SB for RJ45 models only)

For 24V model are all available with -IGN model name (w/ ignition)

- **IMR-3002-2L-2S-24V-EUNA.....P/N: 8611-101**
Industrial Dual LTE (Quad SIM) Load Balancing Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet (incl. 1PD); EU and US band; dual input 9V~56VDC; -40~65C
- **IMR-3002-2L-2S-24V-WW.....P/N: 8611-102**
Industrial Dual LTE (Quad SIM) Load Balancing Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet (incl. 1PD); worldwide band; dual input 9V~56VDC; -40~65C
- **IMR-3002-2L-2S-24V-APAC.....P/N: 8611-103**
Industrial Dual LTE (Quad SIM) Load Balancing Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet (incl. 1PD); APAC band; dual input 9V~56VDC; -40~65C
- **IMR-3002-2L-2SA-24V-EUNA.....P/N: 8611-1011**
Industrial Dual LTE (Quad SIM) Load Balancing Multifunction Router w/ 2 RS422 serial ports and 2 port Gigabit Ethernet (incl. 1PD); EU and US band; dual input 9V~56VDC; -40~65C
- **IMR-3002-2L-2SB-24V-EUNA.....P/N: 8611-1012**
Industrial Dual LTE (Quad SIM) Load Balancing Multifunction Router w/ 2 RS485 serial ports and 2 port Gigabit Ethernet (incl. 1PD); EU and US band; dual input 9V~56VDC; -40~65C
- **IMR-3002-2L-2SA-24V-WW.....P/N: 8611-1021**
Industrial Dual LTE (Quad SIM) Load Balancing Multifunction Router w/ 2 RS422 serial ports and 2 port Gigabit Ethernet (incl. 1PD); worldwide band; dual input 9V~56VDC; -40~65C
- **IMR-3002-2L-2SB-24V-WW.....P/N: 8611-1022**
Industrial Dual LTE (Quad SIM) Load Balancing Multifunction Router w/ 2 RS485 serial ports and 2 port Gigabit Ethernet (incl. 1PD); worldwide band; dual input 9V~56VDC; -40~65C
- **IMR-3002-2L-2SA-24V-APAC.....P/N: 8611-1031**
Industrial Dual LTE (Quad SIM) Load Balancing Multifunction Router w/ 2 RS422 serial ports and 2 port Gigabit Ethernet (incl. 1PD); APAC band; dual input 9V~56VDC; -40~65C
- **IMR-3002-2L-2SB-24V-APAC.....P/N: 8611-1032**

- Industrial Dual LTE (Quad SIM) Load Balancing Multifunction Router w/ 2 RS485 serial ports and 2 port Gigabit Ethernet (incl. 1PD); APAC band; dual input 9V~56VDC; -40~65C
 - **IMR-3002-1L-2S-24V-EUNA.....P/N: 8611-107**
- Industrial One LTE (Dual SIM) Load Balancing Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet (incl. 1PD); EU and US band; dual input 9V~56VDC; -40~65C
 - **IMR-3002-1L-2S-24V-WW.....P/N: 8611-104**
- Industrial One LTE (Dual SIM) Load Balancing Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet (incl. 1PD); worldwide band; dual input 9V~56VDC; -40~65C
 - **IMR-3002-1L-2S-24V-APAC.....P/N: 8611-105**
- Industrial One LTE (Dual SIM) Load Balancing Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet (incl. 1PD); APAC band; dual input 9V~56VDC; -40~65C
 - **IMR-3002-1L-2SA-24V-EUNA.....P/N: 8611-1071**
- Industrial One LTE (Dual SIM) Load Balancing Multifunction Router w/ 2 RS422 serial ports and 2 port Gigabit Ethernet (incl. 1PD); EU and US band; dual input 9V~56VDC; -40~65C
 - **IMR-3002-1L-2SB-24V-EUNA.....P/N: 8611-1072**
- Industrial One LTE (Dual SIM) Load Balancing Multifunction Router w/ 2 RS485 serial ports and 2 port Gigabit Ethernet (incl. 1PD); EU and US band; dual input 9V~56VDC; -40~65C
 - **IMR-3002-1L-2SA-24V-WW.....P/N: 8611-1041**
- Industrial One LTE (Dual SIM) Load Balancing Multifunction Router w/ 2 RS422 serial ports and 2 port Gigabit Ethernet (incl. 1PD); worldwide band; dual input 9V~56VDC; -40~65C
 - **IMR-3002-1L-2SB-24V-WW.....P/N: 8611-1042**
- Industrial One LTE (Dual SIM) Load Balancing Multifunction Router w/ 2 RS485 serial ports and 2 port Gigabit Ethernet (incl. 1PD); worldwide band; dual input 9V~56VDC; -40~65C
 - **IMR-3002-1L-2SA-24V-APACP/N: 8611-1051**
- Industrial One LTE (Dual SIM) Load Balancing Multifunction Router w/ 2 RS422 serial ports and 2 port Gigabit Ethernet (incl. 1PD); APAC band; dual input 9V~56VDC; -40~65C
 - **IMR-3002-1L-2SB-24V-APACP/N: 8611-1052**
- Industrial One LTE (Dual SIM) Load Balancing Multifunction Router w/ 2 RS485 serial ports and 2 port Gigabit Ethernet (incl. 1PD); APAC band; dual input 9V~56VDC; -40~65C
 - **EMMC Flash Storage**
 - **8G.....P/N: 8850-113**
 - **16G.....P/N: 8850-114**
 - **32G.....P/N: 8850-115**

OPTIONAL ACCESSORIES

Management System

- **InstaAir.....P/N: 9000-121**
Cloud Based Fleet Management System for Routers

Cellular Antenna

- **ANT11000041** 2G/3G/4G dipole antenna, 791-960/1710~2170/2500~2700MHz, 3dBi, SMA plug, EU

- **ANT11000042** 2G/3G/4G dipole antenna, 704-960/1710~2170MHz, 3dBi, SMA plug, US

- **ANT11000044** 2G/3G/4G dipole antenna, 704-960/1710~2690MHz, 1.6dBi, SMA plug, EU

- **ANT11000045** 2G/3G/4G dipole antenna, 698-960/1710~2690MHZ, 3dBi, SMA plug, US



GPS Antenna

- **ANT1200001** SMA GPS antenna, 28dB, 300m



Antenna Base

- **ADA1100053** Magnetic antenna base for 3G/4G, RP SMA Jack Base, Length : 1M



Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2023 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global, Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.