

IPES-0008B

8 10/100TX PoE at/af Industrial Ethernet Unmanaged Switch ;
 12V/48V input models

- Support IEEE802.3at/af up to 30W per port
- Dual 9V~56VDC input(12V model) compliant with ISO 7637-2
- Dual 45~56V DC input (48V model)
- Galvanic isolation protection (power input /Ethernet port to case ground)
- Max PoE budget 240W at 48V, 120W at 24V, 80W at 12V input
- Relay alarm output for power fail and alarm
- E-marking certificate for vehicle application (12V model)



OVERVIEW

Lantech IPES-0008B is a high performance all 8 10/100TX industrial Ethernet switch with w/8 PoE 802.3af/at Injectors.

Galvanic isolation for dual 48V, 12V input with max PoE budget

The IPES-0008B supports IEEE802.3at/af standard which can feed HI-power up to 30W at each PoE port for big power consumption devices like PTZ IP camera, High power wireless AP etc.

The IPES-0008B-12V accepts power input 9~56VDC with IEEE802.3at/af standard and feed up to 30W per PoE port. The 12V model is also compliant with ISO 7637-2 which protects switch from being damaged by high voltage that could be found at vehicle cranky start.

The PoE budget is max 240W @48V, 120W @24V, 80W @12V input respectively

E-marking certificate, High reliability and extended working temperature

Lantech IPES-0008B provides $\pm 2000V$ EFT and $\pm 6000V$ ESD protection, which can reduce unstable situation caused by power line and Ethernet. It has high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in Automation, transportation, surveillance, Wireless backhaul, Semiconductor factory and assembly lines.


The -E model can be used in extreme environments with an operating temperature range of $-40^{\circ}C$ to $75^{\circ}C$.

The E-marking certificate (12V model) makes it the most suitable PoE switch for bus, carriage, other vehicles application as well as for industrial areas where the power source is limited with 12V or 24V but has demand of IP surveillance or VoIP applications.

FEATURES & BENEFITS

- 8 10/100TX industrial switch w/8 PoE 802.3af/at Injectors (Total 8 Ports Switch)
- Embedded 8 PoE Injectors IEEE802.3af/at function to feed power up to 30W@54V per port for active operation
- Dual 9V~56VDC power input for 12V model with ISO7637-2 compliance
- PoE budget 80W at 12V input, 120W at 24V input, 240W at 48V input
- Back-plane (Switching Fabric): 1.6Gbps
- Provides EFT protection ± 2000 VDC for power line.
- Supports ± 6000 VDC Ethernet ESD protection
- E-marking certificate for vehicle application (12V model)
- Relay alarm output for power fail and alarm
- IP30 metal housing with DIN rail and Wall-mount** design

DIMENSIONS (unit=mm)

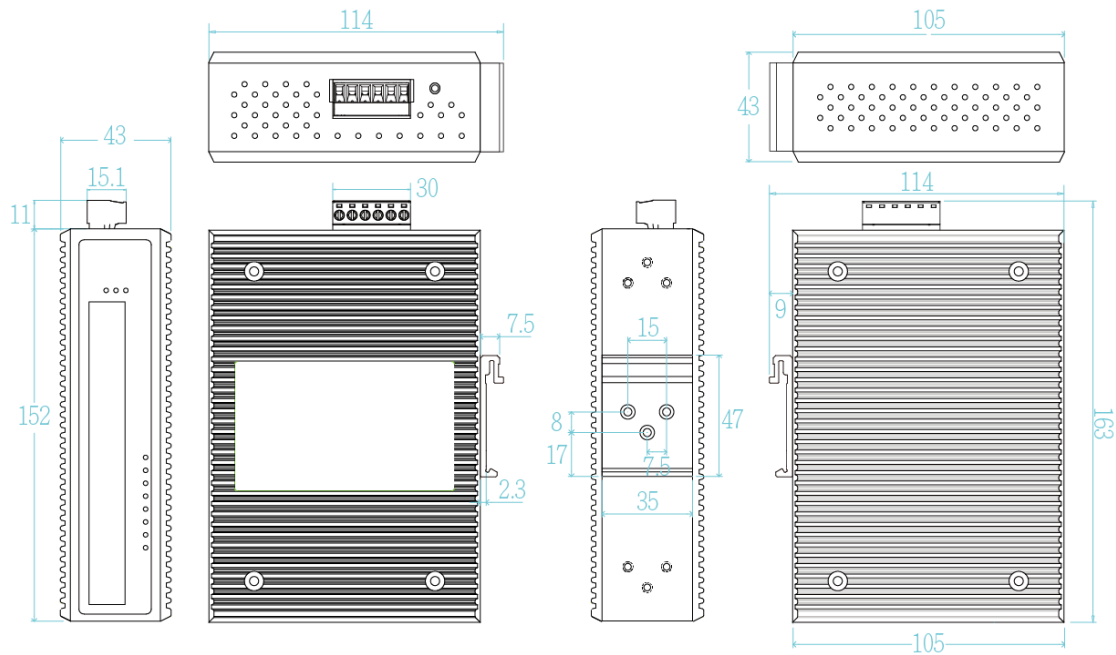

SPECIFICATION

| Hardware Specification | |
|------------------------|---|
| Standards | IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3x Flow Control and Back Pressure IEEE802.3at/af Power over Ethernet |
| Switch Architecture | Back-plane (Switching Fabric): 1.6Gbps |
| Transfer Rate | 14,880pps for Ethernet port 148,800pps for Fast Ethernet port |
| Mac Address | 16K MAC address table |
| Connectors | 10/100TX: 8 x ports RJ-45 with Auto MDI/MDI-X function Power & P-Fail connector: 1 x 6-pole terminal block |
| Network Cable | 10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) |
| LED | Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red); Ethernet port: Link/Activity (Green) PoE : Active (Green) |
| Operating Humidity | 5% ~ 95% (Non-condensing) |
| Operating Temperature | -20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F(-E model) |
| Storage Temperature | -40°C~85°C / -40°F~185°F |
| Power Supply | 45~56VDC(48V model); 9V~56VDC(12V model) |
| PoE Budget | 240W for 45~56V input(48V model) 80W at 12V input; 120W at 24V input(12V model) |
| PoE pin assignment | RJ-45 port # 1~#8 support IEEE 802.3at/af Endpoint, Alternative A mode. Per port provides up to 30W |
| Power | 5W |
| Galvanic Isolation | Between power input and case ground Between Ethernet port and case ground |
| Case Dimension | Metal case, IP-30 43 (W) x 105 (D) x 152 (H) mm |
| Weight | 900 g |
| Installation | DIN Rail and Wall Mount** Design |
| Relay Alarm | Provides one relay output for power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V |
| EMI & EMS | FCC Class A, CE EN55032 Class A, CE EN55024, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE EN61000-4-8 , CE EN61000-6-2 |
| Safety | EN62368 (LVD) |
| Stability Testing | IEC 60068-2-27 (Shock), IEC 60068-2-31 (Shock), IEC 60068-2-32 (Free fall), IEC 60068-2-64 (Vibration), IEC 60068-2-80 (Vibration) |
| Vehicle certificate | E13 marking (12V model) |
| MTBF | 1,022,402 Hrs (IEC62830 standards) |
| Warranty | 5 years |

*Future Release
**Optional

ORDERING INFORMATION

- **IPES-0008B-48V.....P/N: 8351-108**
8 10/100TX w/8 PoE Mode A 802.3at/af 30W Industrial Ethernet Switch; dual 45~56VDC input; -20°C to 60°C
 - **IPES-0008B-48V-E.....P/N: 8351-109**
8 10/100TX w/8 PoE Mode A 802.3at/af 30W Industrial Ethernet Switch; dual 45~56VDC input; -40°C to 75°C
 - **IPES-0008B-12V.....P/N: 8351-110**
8 10/100TX w/8 PoE Mode A 802.3at/af 30W Industrial Ethernet Switch, dual 9V~56VDC input; compliant with ISO7637 & E-marking; -20°C to 60°C
 - **IPES-0008B-12V-E.....P/N: 8351-111**
8 10/100TX w/8 PoE Mode A 802.3at/af 30W Industrial Ethernet Switch, dual 9V~56VDC input, compliant with ISO7637 & E-marking; -40°C to 75°C
- All part no. with WALL are models with wall mount kit instead of DIN Rail

OPTIONAL ACCESSORIES

DIN Rail Power

- **NDR-480 Series** 480W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-240 Series** 240W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-120 Series** 120W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)
- **NDR-75 Series** 75W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2020 Copyright Lantech Communications Global Inc. all rights reserved.
 The revise authority rights of product specifications belong to Lantech Communications Global Inc.
 In a continuing effort to improve and advance technology, product specifications are subject to change without notice.