

# IPGS-0101T (12V/48V)

## Industrial Gigabit Switch with PoE 802.3at/af up to 30W

- IEEE802.3at/af PoE/PSE 30W
- Voltage booster design from 12V to 54V (12V model)
- Extends Power over Ethernet installations beyond 100 Meters
- Operating Temperature Range from -40°C to 75°C (E model)
- AREMA\*\* part 11.5.1 compliance



### OVERVIEW

The Lantech IPGS-0101T is an Industrial high power PoE Gigabit Switch that can feed up to 30W under 802.3at/af standard.

Lantech IPGS-0101T is fully compliant with IEEE 802.3at/af standard. The 12V model can take 9.5~56VDC input voltage for PoE feeding up to 30W which is suitable for vehicle application. Lantech IPGS-0101T is the best industrial PoE Gigabit Switch for outdoor IP CAM, PTZ, heater, wireless AP etc.

**Hardened industrial design with extended temperature range; CE, FCC, LVD, AREMA\*\* part 11.5.1 compliance**


It provides  $\pm 2000V$  EFT and  $\pm 6000V$  ESD protection, which can reduce unstable situation caused by power line and Ethernet. It has high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.

With CE, FCC, LVD and AREMA\*\* part 11.5.1 verification, Lantech IPGS-0101T is best for outdoor community, vehicle, railway, process control automation etc. For more usage flexibilities, IPGS-0101T-E supports wide operating temperature from -40°C to 75°C.

### FEATURES & BENEFITS

- **System Interface/Performance**
  - 1x 10/100/1000T + 1 10/100/1000T with PoE switch
  - Compliant with 802.3at/af PoE standard
  - Output PoE up to 30W
- **Voltage booster design from 12V input to 54V output. (12V model)**
- **Can extend Power over Ethernet installations beyond 100 Meters**
- **Dual Power Input with Terminal Block X2**
- **Metal Housing with DIN Rail and Wall Mount\*\* Design**
- **Supports Wide Operating Temperature -40°C~ 75°C (E model)**
- **Power polarity protection**
- **AREMA\*\* part 11.5.1 compliance (-AMA models)**
- **Relay alarm output for system events**

**DIMENSIONS (unit=mm)**

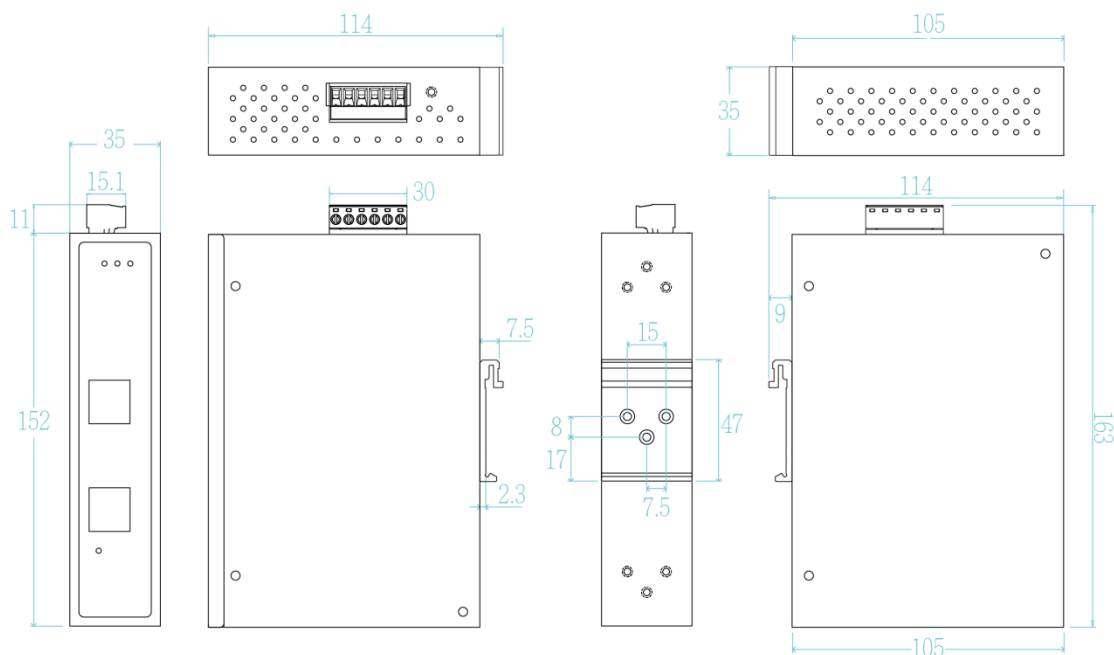

**SPECIFICATION**

Standards	IEEE802.3 10Base-T IEEE802.3u 100Base-TX/100Base-FX IEEE802.3ab 1000Base-T IEEE802.3x Flow Control and Back pressure IEEE802.3at/af PoE/PSE	Polarity protection	Power polarity protection
Switch Architecture	Store and Forward	Relay Alarm	Provides one relay output for power fail alarm. Alarm Relay current carry ability: 1A @ DC24V
Connectors	RJ-45 socket x 2 Power & Relay connector: 1 x 6-pole terminal block	Operating Humidity	5% ~ 95% (Non-condensing)
Network Cable	10Base-T: UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)	Operating Temperature	-20°C~60°C / -4°F~140°F (standard model) -40°C~75°C / -40°F~167°F (E model)
PoE pin assignment	Positive (VCC+): RJ-45 pin 1,2. Negative (VCC-): RJ-45 pin 3,6.	Storage Temperature	-40°C~85°C / -40°F~185°F
LED	PW1 (Green); PW2 (Green); FAULT (Red)	Case Dimension	Metal case. 35 (W) x 105 (D) x 152 (H) mm
Power Supply	Input Voltage: 44V ~ 56VDC (48V model) Input Voltage : 9.5V ~56VDC (12V model)	Installation	DIN Rail and Wall Mount* Design
Power Consumption	5 Watts max.	EMI & EMS	FCC Part 15 Class A IEC/EN61000-6-2 CE EN55032 Class A CE EN55024: CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE N61000-4-8 (Magnetic field) Level 3 AREMA** part 11.5.1 compliance
PoE Budget	30W (50-57VDC input is recommended for 802.3at 30W applications) Higher PoE budget can be applied upon request. **	Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
		MTBF	TBC (standards: IEC 62380)
		Warranty	5 years

\*\*Optional

## ORDERING INFORMATION

Optional AREMA certified models are available with –AMA model names.

- **IPGS-0101T-12V.....P/N: 8350-046**  
1x 10/100/1000T PoE switch up to 30W, 9.5V~56VDC dual input; Operating Temperature -20°C to 60°C
- **IPGS-0101T-12V-E.....P/N: 8350-047**  
1x 10/100/1000T PoE switch up to 30W, 9.5V~56VDC dual input; Operating Temperature -40°C to 75°C
- **IPGS-0101T-48V.....P/N: 8350-048**  
1x 10/100/1000T PoE switch up to 30W, 44V~56VDC dual input; Operating Temperature -20°C to 60°C
- **IPGS-0101T-48V-E.....P/N: 8350-049**  
1x 10/100/1000T PoE switch up to 30W, 44V~56VDC dual input; Operating Temperature -40°C to 75°C

## OPTIONAL ACCESSORIES

### DIN Rail Power

- **NDR-75 Series**     75W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)
- **MDR-40 Series**     40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from 60°C ~ 70°C)

Lantech Communications Global Inc.

www.lantechcom.tw  
info@lantechcom.tw

© 2022 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
Lantech may make changes to specification and product descriptions at anytime, without notice.