

IWAP-3003

Industrial Multifunction VPN Router w/up to 3x WiFi 11ac + up to 4 serial ports + 3 Gigabit Ethernet (incl.1 PD) w/Load Balancing, VPN, Protocol Gateway, Storage; 12V/ 24V input**

- Up to 3 concurrent Wi-Fi 11ac and redundancy (3AC model)
- Built-in 3 Gigabit Ethernet ports (2LAN+1WAN or 3LAN or 3 WAN) (incl. 1PD)
- Dual radio for 802.11ac/a/b/g/n with concurrent 5GHz & 2.4GHz bands up to 2.6Gbps Wi-Fi bandwidth (3AC model)
- MIMO technology 3T3R; SMA type up to 6 external antennas
- VPN router for Multi-site VPN, OpenVPN, L2TP over IPsec, IPsec, L2 over GRE, IPGRE
- Load Balancing built-in 5 mechanism
- Support NAT and Firewall
- Optional EMMC Flash storage on-board**
- Support Modbus gateway
- Support Client-base roaming
- Supports AP/ Bridge/Client/MESH modes
- Support 802.11s Wireless Mesh Network
- Dual Input voltage 9~56VDC (12V model); Dual Input voltage 9~36VDC (24V model)
- Wi-Fi graphic signal strength
- Vehicle E-marking** certificate (24V model)
- ITxPT design w/ ignition function** (24V-IGN model)
- Editable login page of captive portal for hot-spot application
- USB port to backup, restore the configuration file and upgrade firmware; Dual image firmware
- EN50155/61373/45545 verification for railway application (except 24V-IGN model)



RJ45 model



M12 model



OVERVIEW

Lantech IWAP-3003 series is a next generation industrial multi-function VPN router w/up to 3x 802.11ac Wi-Fi + 3x Gigabit Ethernet (incl.1 PD) + 4 serial ports (RJ45 model only) that supports advanced function of VPN, Load-Balancing, EMMC Flash storage**, Protocol gateway (Modbus), and Wi-Fi roaming. The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

Support AP/Bridge/Client mode, Mesh roaming

IWAP-3003 supports AP/Bridge/Client mode for different applications.

It also supports client-base roaming to swap between the APs in a network.

Built-in Wireless Mesh network (WMN)

IWAP-3003 supports Mesh network composed of different nodes. The set of SSIDs allow the wireless client to roam freely without the need for complicated account management. With

Mesh protocol, it can provide a reliable, scalable, stable and seamless network topology.

IEEE 802.11ac dual band radio up to 2.6Gbps bandwidth

With IEEE 802.11ac capability, IWAP-3003 can operate either 5GHz or 2.4GHz bands, offering the maximum speed of 2.6Gbps bandwidth (1.3Gbps per 802.11ac module). It is also compatible with 802.11b/g/n that can work with 2.4GHz for longer range transmission.

The Wi-Fi 11ac supports AP/Bridge/AP Client modes can be diverse for most of wireless application. Working with load-Balancing "Priority" mode, the AP client can enable router to transmit on Wi-Fi with first priority.

Optional EMMC Flash storage**

The optional EMMC flash storage on the router can offer 8G/16G/32G capacity

MIMO technology with 3T3R and SMA type connectors

Lantech IWAP-3003 series adapts MIMO technology with smart antenna transmission and reception for 3T3R. With six external detachable Omni connectors and optional antennas, IWAP-3003 can have better Wi-Fi coverage.

Wireless WMM QoS

IWAP-3003 supports 802.11e standard which defines a set of Quality of Service for wireless LAN applications as well as WMM (Wi-Fi multimedia)

Advanced security & 16 SSIDs

The security support standards including 64/128bits WEP, WPA/WPA2 PSK (TKIP, AES), 802.1x ensures the best security and active defense against security threats. Lantech IWAP-3003 support up to 16 SSIDs, each SSID has its independent security and encryption.

Load Balancing with 5 mechanism for multi-WANs

IWAP-3003 supports Load Balancing for WAN (client mode) connections. There are five schemes for Load Balancing function:

Pack	Algorithm	Description
Basic	Fixed	All traffic will be distributed to a single WAN.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activating another link if the preferred link fails.
	Priority	Select the active WAN according to priority.
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.

4 port serial connection, Modbus gateway

It builds in 4 port serial connection for RS232, RS422, RS485. (RJ45 model only)

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

VPN and firewall

Besides traditional VPN peer to peer tunneling, IWAP-3003 support latest Multi-Site VPN function that is an efficient way for Mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, OpenVPN, L2TP over IPsec, IPsec, L2 over GRE, IPGRE, and NAT for various VPN applications.

The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP / UDP port number.

Support Routing Protocol: Static route / RIPv2 / OSPF / BGP / EIGRP

Lantech router series supports two routing methods: static routing and dynamic routing. Dynamic routing makes use of RIPv2, OSPF, EIGRP and BGP. The user can either choose one routing method to establish the routing table.

Email notice; Event log; Remote Web control

In case of events, the IWAP-3003 will immediately send email and trap.

When the router is at remote area with limited access, Web control can help to get router status or remotely reboot.

12V/24V input voltage selection: dual 9~56VDC (12V model) or dual 9~36VDC (24V model)

The IWAP-3003 is able to work at dual 9~56VDC (12V model) or dual 9~36VDC (24V model).

Built-in 3 port Gigabit Ethernet

3 port Gigabit Ethernet can be supported as 2LAN+1WAN or 3LAN or 3 WAN models.

Graphic Wi-Fi signal strength

The graphic Wi-Fi signal strength shows connection status at a glance

USB port for back up, restore configuration and upgrade firmware; Dual image firmware

The built-in USB port can upload/download the configuration and upgrade firmware through USB dongle for router replacement.

It supports dual-image firmware to choose which one to start.

Ignition Sensing (24V-IGN model)**

Ignition sense allows you to delay power off the router with a designated time delay.

Editable login page of captive portal

The IWAP-3003 supports editable captive portal function that allows administrator to force end-users redirect to authentication page.

Ruggedized industrial design and FCC, CE certificate

The IWAP-3003 is designed to meet with outdoor network environment with IP30 (IP43 for M12 model) housing. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards. With CE & FCC radio certification for Wi-Fi, the IWAP-3003 is best for outdoor community, vehicle, and process control automation applications.

For more usage flexibilities, IWAP-3003 supports wide operating temperature from -20°C to 70°C or -40°C to 70°C (-E)

EN50155, EN61373 verification; E-marking certification; ITxPT** design**

The IWAP-3003 series is also applicable for railway on-board/track side, vehicle and mining applications for more

usage flexibilities. The series is verified with EN50155, EN61373, and EN45545 for railway applications (Except 24V-IGN model). The E-marking certificate (24V model) and ITxPT design (24V-IGN model).

FEATURES & BENEFITS

- **High Speed Air Connectivity:** WLAN interface support up to 2.6Gbps link speed (2/3AC) or 1.3GMbps (1AC)
- **Built-in 3 Gigabit ports and 2LAN+1WAN or 3 LAN or 3 WAN (incl.1 PD)**
- **Dual band 2.4G and 5GHz with 802.11ac/a/b/g/n**
- **Support 2.4Ghz operating within the following frequency bands:**
2.412~2.472 GHz
- **Support 5Ghz operating within the following frequency bands:**
5.180~5.825 GHz
- **MIMO smart antenna technology with 3T3R with 6 SMA type connectors and optional antennas**
- **High-sustainability:** if one link member is down or severely interfered, the other link will keep the network traffic alive.
- **Aggregated bandwidth:** The bandwidth of two link members can be aggregated to provide maximum throughput.
- IEEE 802.11h DFS and automatic TPC
- Output power : <24dBm
- EMMC-FLASH storage**8/16/32G
- Transmit power adjustment
- VAP (virtual access point) support up to 16 SSIDs
- Operation modes : AP / Bridge / Client
- Traffic control for each SSID
- Band preference for same SSID services on dual band
- **Highly Security Capability:** WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)
- HTTP/HTTPS/Telnet/SSH & Administration access
- Support IPv6 & IPv4 protocol
- Radius Authentication, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported
- Multiple channel bandwidths of 20MHz and 40MHz for 2.4G.
- Multiple channel bandwidths of 20MHz, 40MHz and 80MHz for 5G only.
- **Wi-Fi Multimedia (WMM) and 802.11e traffic prioritization**
- Support AP/Bridge/Client/MESH mode
- Support Client-base roaming
- Support 802.11s Wireless Mesh Network
- Support Multi-Site VPN for Mesh tunneling as well as Open VPN, L2TP over IPsec, IPsec, L2 over GRE , IPGRE and NAT for secured network connection
- Support Routing Protocol: Static route / RIPv2 / OSPF / BGP / EIGRP

- **The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP/UDP port number**
- **NAT/DMZ/Port Forwarding**
- **Support SNMP v1/v2c/v3**
- **Load Balancing supports 5 mechanism between multiple WANs**


Pack	Algorithm	Description
Basic	Fixed	All traffic will be distributed to a single WAN.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activating another link if the preferred link fails.
	Priority	Select the active WAN according to priority.
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.

- **Built-in 4 x serial ports (RS232/RS422/RS485) (RJ45 model only)**
- **Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP**
- **Event alerting by Syslog, SNMP Trap, Email, Relay ; Permanent local log rotation / Maxi 1K records**
- **Remote Web control to get status or re-boot by Web**
- **Built-in RTC to keep track of time always**
- **Support SNTP to synchronize system clock**
- **Support LLDP discovery protocol**
- **Support DHCP Server and Client**
- **Reset button for factory default mode**
- **Graphic Wi-Fi signal strength**
- **Firmware upgradeable through TFTP/HTTP**
- **Configuration backup and restoration**
 - Supports text configuration file for system quick installation
 - USB port to upload/download firmware by USB dongle
- **Support editable captive portal login page**
- **IP30 (RJ45 model)/ IP43 (M12 model) housing for industrial environment**
- **RJ45 model: DIN-Rail and Wall-mount** installation**
- **M12 model: Wall-mount installation**


- Supports 2DI / 2DO (Digital Input / Output) (RJ45 model)
- Operation temperature -20~70C or -40°C to 70°C (-E)
- ITxPT design w/ ignition function** (24V-IGN model)
- E-marking** certification (24V model)
- EN50155 & EN61373 verification (Except 24V-IGN model)
- Wide range power input voltage: Dual 9~56VDC (12V model); Dual 9~36VDC (24V model)

DIMENSIONS (unit=mm)

RJ45, 12V/24V model

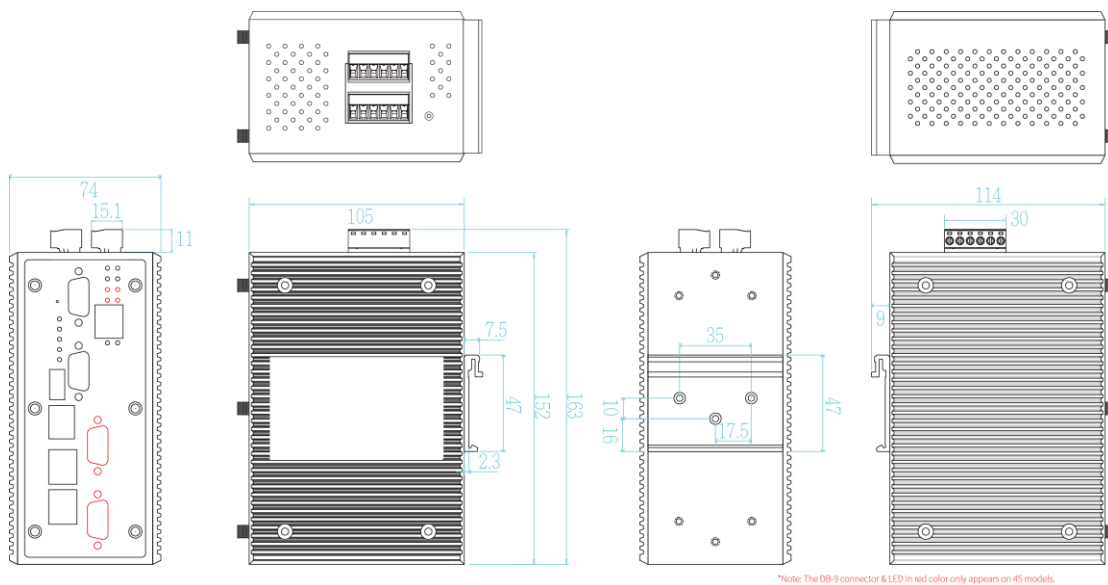

M12, 12V/24V Model

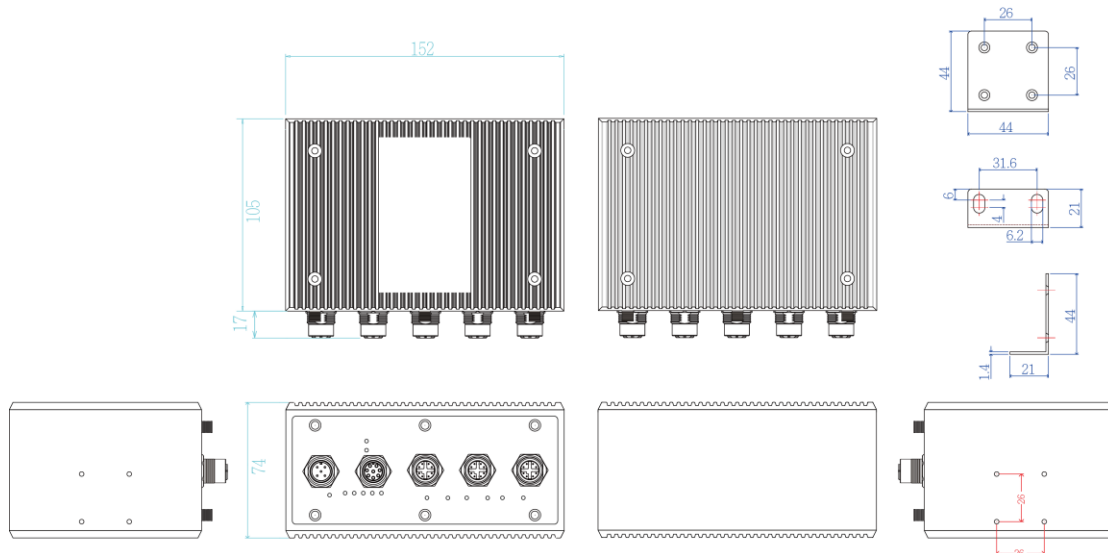

SPECIFICATION

WLAN Interface		
Radio Frequency Type	DSSS, OFDM	802.11a/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
Wireless Standard	IEEE 802.11ac/n/a 5GHz IEEE 802.11b/g/n 2.4GHz	802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
Wireless bandwidth	5GHz: Up to 1300Mbps 2.4GHz: Up to 450Mbps	802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)
Modulation	802.11b: DSSS	Operating Frequency IEEE 802.11 a/b/g/n ISM Band, 2.412GHz~2.472GHz, 5150MHz~5850MHz

Transmission Rate	IEEE802.11ac: up to 1300Mbps IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps IEEE802.11n: up to 450Mbps	Timer	Built-in Real Time Clock to keep track of time always(RTC)
IEEE 802.11b/g/n(2.4Gbps)	Output Power Tx +/- 2dB(per chain) 18dBm @ 1~11Mbps 18dBm @ 6~54Mbps 20/20dBm @ MCS0~MCS7 (HT20/40) Receiver Sensitivity Rx +/- 2dB ≤ -95dBm @ 1~11Mbps ≤ -92dBm @ 6~18Mbps ≤ -88dBm @ 24Mbps ≤ -85dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -94dBm @ MCS0 (HT20/40) ≤ -76dBm @ MCS7 (HT20/40)	Discovery	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
		SNMP trap	Device cold / warm start Port link up / link down Graphic Wi-Fi signal strength
IEEE 802.11a/n/ac(5Gbps)	Output Power Tx +/- 2dB(per chain) 20dBm @ 6~24Mbps 16dBm @ 36~54Mbps 19/18dBm @ MCS0 (HT20/40) 16/16dBm @ MCS7 (HT20/40) 19/18/18dBm @ MCS0 (VHT20/40/80) 13/13/13dBm @ MCS8 (VHT20/40/80) 13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤ -80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80)	Graphic signal display	
		Remote Web control	To reboot or get status of router by WebUI
Encryption Security	WEP : (64-bit ,128-bit key supported) WPA /WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) EAP-TLS,EAP-TTLS, PEAP	Captive portal	Editable captive portal login page
		Maintenance	Firmware upgradeable through TFTP/ HTTP
Wireless Security	SSID broadcast disable	Configuration backup & restore	Supports text configuration file for quick system installation USB port to upload/download firmware by USB dongle
Software		Physical Ports & System	
IPV6/4	Present	Connectors	RJ45 model 10/100/1000T: 3 x ports RJ 45 with Auto MDI/MDI-X function (one port PD) USB x 1 Console connector: 1 x RJ 45 Serial connector : 2 or 4 x DB9 Power & P-Fail connector: 1 x 6-pole terminal block M12 model 10/100/1000T: 3 x M12 8-pole X-coded Female with Auto MDI/MDI-X function (one port PD) Power & P-Fail connector: M12 5-pole A-coded Male Reset/ Console/ USB connector: M12 8-pole A-coded Female
Operation Mode	AP/Bridge/Client/MESH mode	Antenna Connectors	RP-SMA connector for Wi-Fi 3AC: 6 (female) RP-SMA connector for Wi-Fi 2AC: 6 (female) RP-SMA connector for Wi-Fi 1AC: 3 (female)
Login Security	Supports IEEE802.1x Authentication/RADIUS	Serial Baud Rate	1000Kbps high data rate, 250kbps normal for RS232 ; 20Mbps high data rate, 250kbps normal for RS422/RS485 (RJ45 model only)
Access Security	HTTP/HTTPS/Telnet/SSH & Administration; SNMP v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3)	Serial Data Bits	5, 6, 7, 8
Protocol	PoE Client, DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ; NAT, SNTP, Firewall(Firewall(DDoS; IP address filter / Mac address filter / TCP/UDP port name), VRRP, DDNS	Serial Parity	odd, even, none, mark, space
Routing	Static route / RIPv2 / OSPF / BGP / EIGRP	Serial Stop Bits	1, 1.5, 2
Management	SNMP v1,v2c,v3/ Web/Telnet/CLI	RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Load Balancing	5 schemes for multiple WAN	RS-422	Tx+, Tx-, Rx+, Rx-, GND
Basic		RS-485 (2-wire)	Data+, Data, GND
Fixed	All traffic will be distributed to a single WAN.	Isolation protection	Input power to I/O: 1.5KV isolation Input power to Ethernet 1.5KV isolation
Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activating another link if the preferred link fails.	EMMC Storage**	8/16/32 GB
Priority	Select the active WAN according to priority.	DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA
Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights	LED Indicators	
Custom Route	Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.	Power & System indicator	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red), Storage (Green), Serial (Green), Ready (Green)
Roaming	Client-base roaming	10/100/1000Base-T(X) port indicator	Link/Activity (Green), Speed (1000T: Yellow; 10/100T: off)
MESH	Support 802.11s Wireless Mesh Network	WLAN	Green: Link/Act
WMM	Wi-Fi multimedia and 802.11e traffic prioritization	Fault	Red: Ethernet link down or power down
Security	WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)/SSH/SSL/HTTPS	Fault contact	
Authentication	Radius Authentication, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported	Relay	Relay output to carry capacity of 1A at 24VDC
SSID	16 sets	Power	
		Input power	Dual DC input, 9~56VDC (12V model) Dual DC input, 9~36VDC (24V model)
		Power consumption (Typ.)	20 Watts
		Physical Characteristic	
		Enclosure	IP 30 Metal case (RJ45 model) IP 43 Metal case (M12 model)
		Dimension	RJ45, 12V/ 24V model: 74 (W) x 114 (D) x 152 (H) mm M12 model: 74 (W) x 122 (D) x 152 (H) mm
		Weight	900g
		Installation	RJ45 model: DIN-Rail and Wall-mount** installation M12 model: Wall-mount installation
		Environmental	
		Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
		Operating Temperature	-20°C ~ 70°C (-4°F ~ 158°F) -40°C ~ 70°C (-40°F ~ 158°F) -E model
		Operating Humidity	5% to 95% Non-condensing
		Regulatory approvals	
		Safety	EN 62368-1

EMC	FCC Part 15B Class A, ICES-003 ISSUE7, EN 55032: 2015, EN 55024: 2015 IEC 61000-6-2, IEC 61000-6-4 BS EN55032, BS EN55024	EN 301 489-52, EN 302 502, EN 301 893, EN 300 328, EN 62311
EMS	IEC 61000-4-2 (ESD), IEC 61000-4-3 (RS), IEC 61000-4-4 (EFT), IEC 61000-4-5 (Surge), IEC 61000-4-6 (CS), IEC 61000-4-8 (PFMF) BS EN61000-4-2, BS EN61000-4-3, BS EN61000-4-4, BS EN61000-4-5, BS EN61000-4-6, BS EN61000-4-8,	Stability Testing IEC 60068-2-27 (Shock) IEC 60068-2-31 (Shock) IEC 60068-2-64 (Vibration) IEC 60068-2-80 (Vibration)
		Vehicle Certificate (24V model) E13 marking** (UN ECE R10)
		Vehicle Compliance (24V model) UN ECE R118, ITxPT design** (ITxPT design is IGN model only)
		Railway Compliance (Except -IGN model) EN50155 EN61373 EN45545 IEC 60571
		MTBF NA
Radio Frequency	EN 301 489-1, EN 301 489-17, EN 301 489-19,	Warranty 5 years

*Future Release

**Optional

RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	20dBm	25dBm	±2dB	-95dBm	±2dB
	2Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	5.5Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	11Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
2.4GHz 802.11g	6Mbps	21dBm	26dBm	±2dB	-94dBm	±2dB
	9Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	12Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	18Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	24Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	36Mbps	20dBm	25dBm	±2dB	-85dBm	±2dB
	48Mbps	19dBm	24dBm	±2dB	-82dBm	±2dB
	54Mbps	18dBm	23dBm	±2dB	-80dBm	±2dB
2.4GHz 802.11n HT20	MCS 0	21dBm	26dBm	±2dB	-94dBm	±2dB
	MCS 1	21dBm	26dBm	±2dB	-92dBm	±2dB
	MCS 2	21dBm	26dBm	±2dB	-89dBm	±2dB
	MCS 3	20dBm	25dBm	±2dB	-84dBm	±2dB
	MCS 4	20dBm	25dBm	±2dB	-83dBm	±2dB
	MCS 5	20dBm	25dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
2.4GHz 802.11n HT40	MCS 7	16dBm	21dBm	±2dB	-77dBm	±2dB
	MCS 0	20dBm	25dBm	±2dB	-93dBm	±2dB
	MCS 1	20dBm	25dBm	±2dB	-91dBm	±2dB
	MCS 2	20dBm	25dBm	±2dB	-89dBm	±2dB
	MCS 3	19dBm	24dBm	±2dB	-84dBm	±2dB
	MCS 4	19dBm	24dBm	±2dB	-82dBm	±2dB
	MCS 5	19dBm	24dBm	±2dB	-80dBm	±2dB
MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB	
MCS 7	16dBm	21dBm	±2dB	-75dBm	±2dB	

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	9Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	12Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	18Mbps	20dBm	25dBm	±2dB	-91dBm	±2dB
	24Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
	36Mbps	18dBm	23dBm	±2dB	-86dBm	±2dB
	48Mbps	16dBm	21dBm	±2dB	-83dBm	±2dB
	54Mbps	15dBm	20dBm	±2dB	-80dBm	±2dB
	5GHz 802.11n/ac VHT20	MCS 0	19dBm	24dBm	±2dB	-93dBm
MCS 1		19dBm	24dBm	±2dB	-90dBm	±2dB
MCS 2		19dBm	24dBm	±2dB	-87dBm	±2dB
MCS 3		18dBm	23dBm	±2dB	-83dBm	±2dB
MCS 4		18dBm	23dBm	±2dB	-80dBm	±2dB
MCS 5		17dBm	22dBm	±2dB	-77dBm	±2dB
MCS 6		16dBm	21dBm	±2dB	-74dBm	±2dB
MCS 7		14dBm	19dBm	±2dB	-73dBm	±2dB
MCS 8		13dBm	18dBm	±2dB	-71dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 0	18dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-82dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-75dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-73dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
5GHz 802.11ac VHT80	MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB
	MCS 0	18dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-83dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-78dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-75dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-72dBm	±2dB
MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB	
MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB	

ORDERING INFORMATION

1. For -40~75C operational temperature model, the model name will add -E
2. M12 models are available with -M12 model names (-2S/-4S/-2SA/-2SB/-2S2SA/-2S2SB are RJ45 models only)
3. 2 RS422 models are available with -2SA; 2 RS485 models are available with -2SB; 2 RS232+ 2 RS422 models are available with -2S2SA; 2 RS232+ 2 RS485 models are available with -2S2SB (RJ45 models only)
4. For 24V model are all available with -IGN model name (w/ ignition)

12V model

- **IWAP-3003-1AC-12V.....P/N: 8612-301**
One Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-1AC-2S-12V.....P/N: 8612-302**
One Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-1AC-4S-12V.....P/N: 8612-303**
One Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/ 4 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-2AC-12V.....P/N: 8612-304**
Two Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-2AC-2S-12V.....P/N: 8612-305**
Two Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-2AC-4S-12V.....P/N:8612-306**
Two Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/4 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-3AC-12V.....P/N: 8612-307**
Three Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-3AC-2S-12V.....P/N: 8612-308**
Three Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-3AC-4S-12V.....P/N:8612-309**
Three Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/ 4 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-M12-1AC-12V.....P/N: 8612-401**
One Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port M12 Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-M12-2AC-12V.....P/N: 8612-4011**
Two Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port M12 Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C
- **IWAP-3003-M12-3AC-12V.....P/N: 8612-4012**
Three Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port M12 Gigabit Ethernet (incl. 1PD); dual input 9V~56VDC; -20~70C

24V model

- **IWAP-3003-1AC-24V.....P/N: 8612-310**
One Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
- **IWAP-3003-1AC-2S-24V.....P/N: 8612-311**
One Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
- **IWAP-3003-1AC-4S-24V.....P/N: 8612-312**
One Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/ 4 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
- **IWAP-3003-2AC-24V.....P/N: 8612-313**
Two Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
- **IWAP-3003-2AC-2S-24V.....P/N: 8612-314**

- Two Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
 ■ **IWAP-3003-2AC-4S-24V.....P/N:8612-315**
- Two Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/4 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
 ■ **IWAP-3003-3AC-24V.....P/N: 8612-316**
- Three Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
 ■ **IWAP-3003-3AC-2S-24V.....P/N: 8612-317**
- Three Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
 ■ **IWAP-3003-3AC-4S-24V.....P/N:8612-318**
- Three Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router w/ 4 RS232 serial ports and 3 port Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
 ■ **IWAP-3003-M12-1AC-24V.....P/N: 8612-402**
- One Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port M12 Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
 ■ **IWAP-3003-M12-2AC-24V.....P/N: 8612-4021**
- Two Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port M12 Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C
 ■ **IWAP-3003-M12-3AC-24V.....P/N: 8612-4022**
- Three Wi-Fi 11ac/a/b/g/n Load Balancing Multifunction Router and 3 port M12 Gigabit Ethernet (incl. 1PD); dual input 9V~36VDC; -20~70C

EMMC Flash Storage

- **8G.....P/N:8850-113**
- **16G.....P/N:8850-114**
- **32G.....P/N:8850-115**

OPTIONAL ACCESSORIES

Management System

- **InstaAir.....P/N: 9000-121**
Cloud Based Fleet Management System for Routers

Wi-Fi Antenna

- **ANT11000051** 2.4/5GHz SMA dipole Wi-Fi antenna, 3dBi (2.4GHz), 4dBi (5GHz)



- **ANT11000055** 2.4/5GHz SMA dipole Wi-Fi antenna, 6dBi (2.4GHz), 4dBi (5GHz)



Antenna Base

- **ADA11000052** Magnetic antenna base for Wi-Fi, RP SMA Jack Base, Length : 1M



Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2023 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.