


T(P)ER-3208T

8 10/100TX + 2 10/100/1000T L2+ (w/8 PoE at/af) Vehicle and EN50155

NAT Router switch w/ Enhanced G.8032 Ring

- EN61373*, E-mark certificate for vehicle
- EN50155 certificate* (TVI model)
- ITxPT* labeled w/ignition function, delay shut down, standby green mode, Inventory service
- ISO16750-2 P5A compliant
- WAN port supports routing firewall, basic network interface.
- Galvanic PoE Isolation; Support IEEE802.3at/af up to 30W per port; PoE budget 80W
- PoE management incl. Detection and Scheduling
- Efficient POE configuration when ignition off
- RTC feature powered from golden capacitor; firmware stored in eMMC
- Inrush current prevention; polarity reverse protection
- Enhanced G.8032 ring protection < 20ms for single ring. Supports enhanced mode and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 8 MSTI /RSTP
- Miss-wiring avoidance & node failure protection
- User-friendly UI, including auto topology drawing; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82; DHCP Snooping; Port based DHCP distribution, Mac based DHCP server, SSH v2/SSL, HTTPS, INGRESS ACL L2/L3
- 24V input voltage with galvanic isolation between input power, PoE, and all Ethernet ports
- Optional bypass in case of power failure (-BT model)

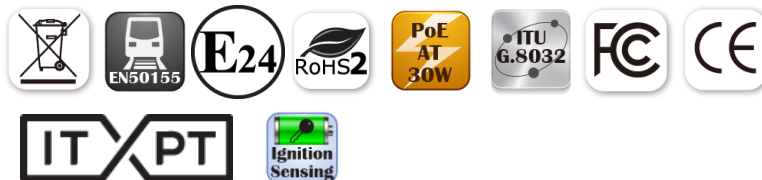

OVERVIEW

Lantech T(P)ER-3208T is a high-performance L2+ all Gigabit switch with 8 10/100TX + 2 10/100/1000T (w/8 PoE 802.3af/at) which provides L2 wire speed and advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms for a single ring, comprehensive QoS, VLAN, GVRP, advanced security SSH v2/SSL, INGRESS ACL L2/L3, IGMPv1/v2/v3/router port, DHCP server/relay, jumbo frame which are important features required in mid and large network. It also supports Cisco Discovery Protocol (CDP) and LLDP for Ciscosystems to detect the switch info and to be shown on L2 map topology.

PoE at/af up to 8 Ports with detection and scheduling

Lantech TPER-3208T supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs and then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Each PoE ports can be Enabled/disabled, get the voltage, current, Watt, and temperature info displayed

on WebUI.

Support RTC (Real Time Clock) with longevity Golden Capacitor

Our switch supports RTC which is powered by a golden capacitor, ensuring accurate real-time event logs. Unlike traditional batteries, golden capacitors offer superior reliability, and longevity, without a need to change battery.

Reliable eMMC for better power efficiency and reliability

The T(P)ER-3208T utilizes eMMC for firmware storage. The eMMC with integrated controller that offloads and simplifies the task for the main processor. Its standard interface simplifies the design process while delivering improved power efficiency and enhanced reliability, thereby extending the storage's lifespan. increasing the lifespan of the storage.

Miss-wiring avoidance, Node failure protection, Loop protection

The T(P)ER-3208T also embedded several features for

stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech T(P)ER-3208T is able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

User-friendly GUI, Auto topology drawing, Enhanced Environmental Monitoring

The user-friendly UI, innovative auto topology drawing and topology demo makes T(P)ER-3208T much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line. It supports enhanced environmental monitoring for actual input voltage, current, ambient temperature and total power load.

Enhanced G.8032 ring, 8 MSTI MSTP

Lantech T(P)ER-3208T features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering multicast packets. It also supports various ring topologies that covers enhanced ring and basic ring by easy setup than others. It supports MSTP that allows each spanning tree for each VLAN for redundant links with 8 MSTI.

DHCP option 82 & Port based, Mac based DHCP, Option66, DHCP Snooping

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Snooping is supported. DHCP Option66 server can offer IP address of TFTP server to DHCP client for VOIP application.

WAN supported

Static IP address, PPPoE (V4&V6), DHCP client
 L3 routing functions, Default routing, Static route, dynamic route
 Firewall, Port forwarding, DMZ, Filtering,
 Remote admin, DDoS protection, NAT (V4)

GVRP supported

It supports the GVRP for large VLAN segmentation.

IGMPv3, MLD snooping, query, GMRP, router port, static multicast forwarding and multicast Ring protection

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMP v3 with Query mode for multimedia;, GMRP, router port, MLD snooping and static multicast forwarding binding by ports for video surveillance applications.

802.1X security by MAC address

MAC-based port authentication is an alternative approach to 802.1x for authenticating hosts connected to a port. By authenticating based on the host's source MAC address, the host is not required to run a user for the 802.1x protocol. The RADIUS server that performs the authentication will inform the switch if this MAC can be registered in the MAC address table of switch.

Editable configuration text file; Factory reset pin; CPU watchdog

The configuration file of Lantech TPER-3208T can be exported in text file so that it can be edited and configured back to switch with ease for mass deployment. Factory reset pin can restore the setting back to factory default and built-in watchdog design can automatically reboot the switch when CPU is found dead.

USB port for backup, restore configuration and upgrade firmware

The built-in USB port can upload/download the firmware, export and import configuration

Redundant dual power input design (24VI-24TVI model); inrush current prevention and polarity reverse protection

The Lantech T(P)ER-3208T is designed with dual power which can accept 9V~36VDC for bus with galvanic PoE isolation, 24TVI for train use which is 16.8-56VDC with galvanic PoE isolation. The redundant power input design prevents inrush current and safeguards against polarity reversal.

The built-in PoE galvanic isolation up to 1.5KVDC can provide power input to PoE port insulation to prevent cable short, spike, and surge flooding through PoE cabling from damaging the POE port or connected device.

Optional bypass relay prevents from power lost

The optional bypass relay is set to bypass the switch to the next one when power is off in order to protect the network from crashing. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. Smart bypass can be activated when switch encounters power failure. (-BT model)

E-marking certificate; ISO 16750-2 compliant

The T(P)ER-3208T is designed to meet with critical network environment with IP65/IP54 enclosure and M12 connectors for protection against dust and water. It has passed harsh environmental testing to comply with Industrial EMI and Safety standards as well as stability testing such as Free fall, Shock, and vibration. It is labeled with ITxPT public transport standards and also compliant with ISO 16750-2 P5A (12V system DC14V 87V/0.5Ω/400ms; 24V system DC28V 174V/2Ω/350ms) which protects the switch from being damaged by high voltage that could be found at vehicle cranky start.

ITxPT label* for delay shut down, inventory service, standby green mode

When the engine of vehicle turns off, the switch is able to extend the work from 30sec to 60mins (Management mode)
 The switch must be able to provide SRV and TXT record to back office, and exports the data in xml file format
 The consumption power under sleep mode meets the standard of ITxPT. (-IGN model)

Efficient PoE configuration when ignition off

Pre-configured per port PoE ON/OFF at ignition off mode to prevent batter drain out. (-IGN model)

EN61373* verification; High ESD protection

Lantech T(P)ER-3208T features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel

automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless


backhaul, semi-conductor factory and assembly lines.

FEATURES & BENEFITS


- **8 10/100TX + 2 1000T (w/8 PoE 802.3af/at ports) (Total 10 Ports Switch)**
- **Support 10K bytes jumbo frames**
- **Dual 9-36VDC power input for 24VI model; dual 16.8~56VDC power input for 24TVI model; PoE budget 80W**
- **PoE management including PoE detection and scheduling for PD (power devices)**
- **Efficient POE configuration when ignition off (-IGN model)**
- **Back-plane (Switching Fabric): 5.6Gbps**
- **16K MAC address table**
- **User-friendly UI, auto topology drawing, topology demo, complete CLI for professional setting**
- **Enhanced G.8032 Ring protection in 20ms for single ring**
 - *Support various ring/chain topologies, including enhanced ring and basic ring*
 - *Enhanced G.8032 ring configuration with ease*
 - *Cover multicast and data packets protection*
- **Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority**
- **IEEE 802.1d STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP VLAN redundancy with 8 MSTI**
- **4K 802.1Q VLAN, port-based VLAN, GVRP**
- **Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console**
- **DHCP server/client / DHCP Option 82 relay / DHCP Option 82 server/relay Port based DHCP server; DHCP Snooping; DHCP option 66**
- **Bandwidth Control**
 - *Ingress packet filter*
 - *Broadcast/multicast packet filter control*
- **Miss-wiring avoidance**
 - *LED indicator*
- **Node failure protection**
 - *Ensure the switches in a ring to survive after power breakout is back*
 - *The status can be shown in NMS when each switch is back*
- **System Event Log, SNMP Trap for alarm support; 32 RMON counters**
- **Security**
 - *SSL/SSH v2/INGRESS ACL L2/L3*
 - *Port Security: MAC address entries/Filter/static MAC-Port binding*
 - *Remote Admin: IP address security management to prevent unauthorized intruder*
 - *Login Security: IEEE802.1X/RADIUS*
 - *HTTPS for secure access to the web interface*
- **Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application**
- **IGMP router port to assign query in ring for reversed multicast video flow**
- **IGMPv1,v2,v3 with Query mode for multimedia; GMRP**
- **Configuration backup and restoration**
 - *Supports editable configuration file for system quick installation*
 - *USB port for upload / download configuration by USB dongle*
- **TFTP/ HTTP firmware upgrade**
- **Watchdog design to auto reboot switch CPU is found dead**
- **RTC (Real Time Clock) feature**
- **eMMC for firmware storage**
- **Inrush current prevention; polarity reverse protection**
- **IP65/IP54 with Wall-mount design**
- **E-marking certificate for vehicle application**
- **Supports ±4000 VDC (Contact) and ±8000 VDC (Air) Ethernet ESD protection**
- **Bypass protection** - Bypass failed switch caused by power failure of switch to protect network intactness (-BT model)**

DIMENSIONS (unit=mm)

PoE models

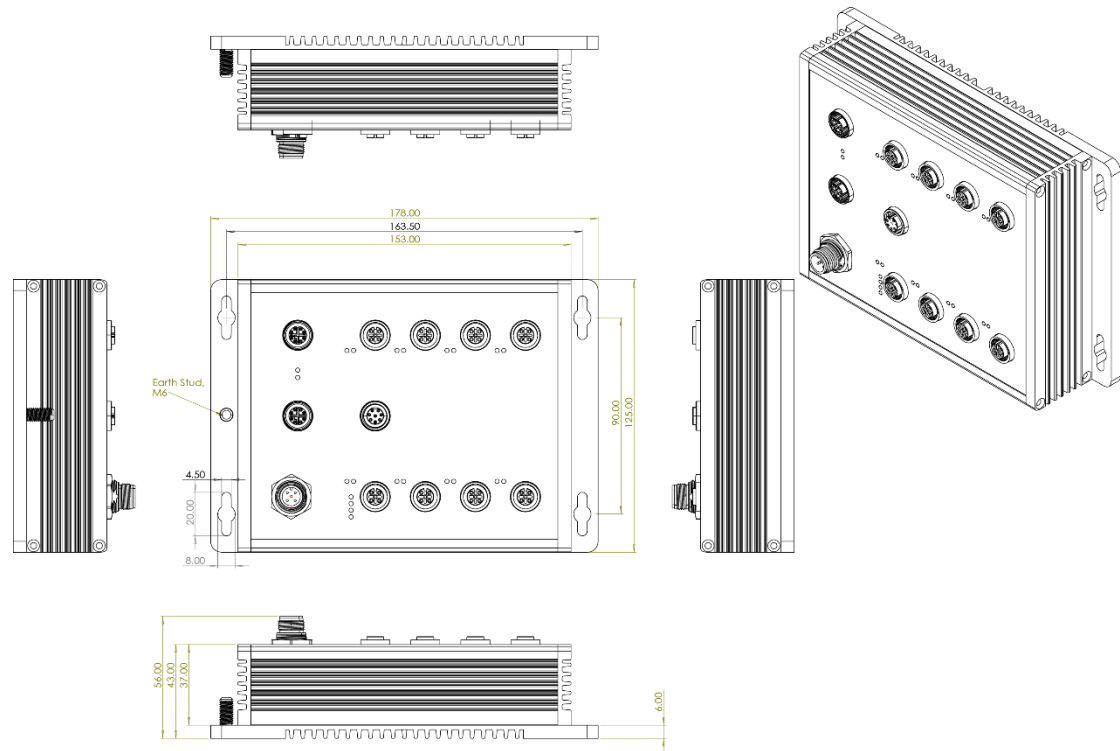

Non-PoE models

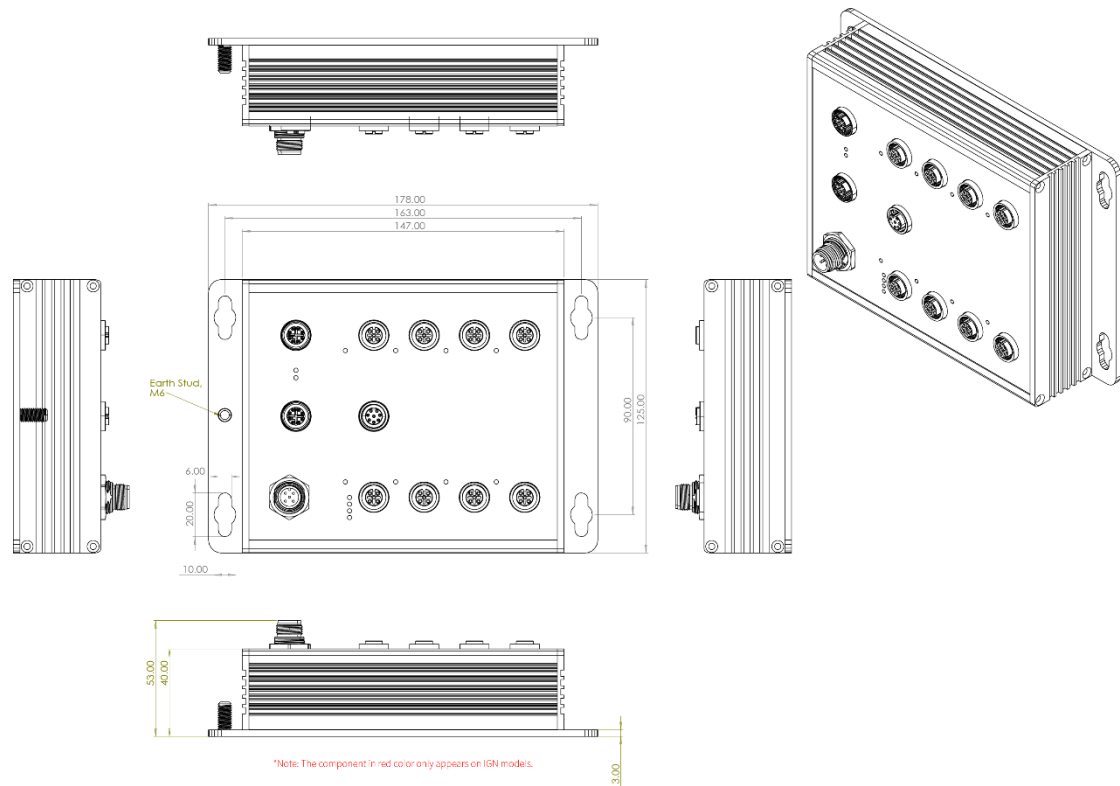

SPECIFICATION

Hardware Specification		Bypass**	One pair bypass module on uplink ports to pass to next switch in case of power failure and CPU hang (-BT model)
Standards		Software Specification	
IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T Ethernet IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet	Switch Architecture	Back-plane (Switching Fabric): 5.6Gbps	Management SNMP v1 v2c, v3/ Web/Telnet/CLI SNMP MIB MIBII MIB SNMP MIB, IF MIB RMON MIB, Bridge MIB, LLDP MIB Private MIB Enhanced G.8032 ring Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode) Support various ring/chain topologies Includes basic single ring and enhanced ring Enhanced G.8032 ring configuration with ease Cover multicast & data packets protection
	Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port	
	Mac Address	16K MAC address table	
	Jumbo frame	10KB	
	Connectors	10/100TX: 8 x M12 4-pole D-coded 10/100/1000T: 1 x M12 8-pole X-coded 10/100/1000T WAN/LAN configurable 1 x M12 8-pole X-coded Power Input connector: 1 x M12 4-pole Male A-coded (5-pole: -IGN model) Reset/Console/USB: 1 x M12 8-pole A-code	
	Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)	
	LED	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) Ethernet port: Link/Activity (Green), Speed (Amber); PoE: Link/Act (Green);	
	Operating Humidity	5% ~ 95% (Non-condensing)	
	Operating Temperature	-40°C~70°C / -40°F~167°F	
	Storage Temperature	-40°C~85°C / -40°F~185°F	
	Power Supply	9-36VDC (24VI) 16.8-56VDC (24TVI)	PoE Management 1. PoE Detection to check if PD is hang up then restart the PD 2. PoE Scheduling to On/OFF PD upon routine time table Per Port PoE Status On/ Off, voltage, current, watts, temperature User friendly UI ■ Auto topology drawing ■ Topology demo ■ Complete CLI for professional setting Port Trunk with LACP LACP Port Trunk: 8 Trunk groups LLDP Supports LLDP to allow switch to advise its identification and capability on the LAN CDP Cisco Discovery Protocol for topology mapping VLAN Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.) GVRP IPv6/4 Present RSTP/MSTP Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 8 MSTI Quality of Service The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP Class of Service Support IEEE802.1p class of service, per port provides 8 priority queues Remote Admin Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. Login Security Supports IEEE802.1X Authentication/RADIUS Port Mirror Support 3 mirroring types: "RX, TX and Both packet" Network Security Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control/MAC-Port binding INGRESS ACL L2/L3 SSL/ SSH v2 for Management HTTPS for secure access to the web interface IGMP Support IGMP snooping v1,v2,v3; 1024 multicast groups; IGMP router port ; IGMP query; GMRP, MLD snooping Static MAC-Port bridge Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application WAN Port ■ PPPoE ■ DHCP client L3 routing functions Static route RIP/OSPF Firewall Port forwarding DMZ
	PoE Budget	80W at 24VDC Higher PoE budget can be applied upon request. **	
	PoE pin assignment	M12 port #1-#8 supports IEEE 802. 3at/af End-point. Per port provides up to 30W	
	Power Consumption	12W (w/o PoE load)	
	Case Dimension	IP65/IP54: Aluminum case 178mm(W)x125mm(H)x56mm(D) (PoE models) 178mm(W)x125mm(H)x53mm(D) (Non-PoE models)	
	Weight	950g (PoE models) 880g (Non-PoE models)	
	Installation	Wall Mount	
	EMI & EMS	FCC Class A, CE EN55032 Class A, CE EN55024, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE EN61000-4-8, CE EN61000-6-2, CE EN61000-6-4	
	Verifications	EN50155/EN50121-3-2/EN50121-4* EN45545-1, EN 45545-2 Fire & Smoke	
	Stability Testing	EN61373 (Shock and Vibration)*	
	Vehicle Certificate	E24 marking (UN ECE R10) ITxPT labeled*	
	Vehicle Compliance	UN ECE R118	
	MTBF	351,801 hrs	
	Warranty	5 years	

	Filtering Remote admin DDoS protection NAT		<ul style="list-style-type: none"> Authorization failure Port link up/link down Topology change (ITU ring) Power failure Environmental abnormal
Bandwidth Control	Support ingress packet filter. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter.	DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82 (Server and relay)/Port based DHCP; DHCP Snooping; DHCP option 66
Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex	DNS	Provide DNS Client feature and support Primary and Secondary DNS server.
System Log	Supports System log record and remote system log server	SNTP	Supports SNTP to synchronize system clock in Internet
Protection	<ul style="list-style-type: none"> Miss-wiring avoidance Node failure protection Loop protection 	Firmware Update	Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade
SNMP Trap	Up to 10 trap stations; trap types including: <ul style="list-style-type: none"> Device cold start 	Configuration upload and download	Supports editable configuration file for system quick installation; Support factory reset pin to restore all settings back to factory default; USB port for upload/download configuration by USB dongle

*Future Release

**Optional

ORDERING INFORMATION

All model packages include M12 caps. For coating add -C to model name; for optional bypass add -BT (one pair) to end of model names.

- **TPER-3208T-65-24VI P/N: 8351-13901**
8 10/100TX + 2 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/ PoE galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP65 rated
- **TPER-3208T-65-24VI-IGNP/N: 8351-13911**
8 10/100TX + 2 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/ PoE galvanic isolation & ignition; 9~36VDC dual input; -40°C to 70°C; IP65 rated
- **TPER-3208T-65-24TVI P/N: 8351-13921**
8 10/100TX + 2 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/ PoE galvanic isolation; 16.8~56VDC dual input; -40°C to 70°C; IP65 rated
- **TER-3208T-65-24VI P/N: 8351-13931**
8 10/100TX + 2 10/100/1000T L2+ NAT router Switch w/ galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP65 rated
- **TER-3208T-65-24VI-IGN P/N: 8351-13941**
8 10/100TX + 2 10/100/1000T L2+ NAT router Switch w/ galvanic isolation & ignition; 9~36VDC dual input; -40°C to 70°C; IP65 rated
- **TER-3208T-65-24TVI P/N: 8351-13951**
8 10/100TX + 2 10/100/1000T L2+ NAT router Switch w/ galvanic isolation; 16.8~56VDC dual input; -40°C to 70°C; IP65 rated
- **TPER-3208T-54-24VI P/N: 8351-139**
8 10/100TX + 2 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/ PoE galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP54 rated
- **TPER-3208T-54-24VI-IGNP/N: 8351-1391**
8 10/100TX + 2 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/ PoE galvanic isolation & ignition; 9~36VDC dual input; -40°C to 70°C; IP54 rated
- **TPER-3208T-54-24TVI P/N: 8351-1392**
8 10/100TX + 2 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/ PoE galvanic isolation; 16.8~56VDC dual input; -40°C to 70°C; IP54 rated
- **TER-3208T-54-24VI P/N: 8351-1393**
8 10/100TX + 2 10/100/1000T L2+ NAT router Switch w/ galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP54 rated
- **TER-3208T-54-24VI-IGN P/N: 8351-1394**
8 10/100TX + 2 10/100/1000T L2+ NAT router Switch w/ galvanic isolation & ignition; 9~36VDC dual input; -40°C to 70°C; IP54 rated
- **TER-3208T-54-24TVI P/N: 8351-1395**
8 10/100TX + 2 10/100/1000T L2+ NAT router Switch w/ galvanic isolation; 16.8~56VDC dual input; -40°C to 70°C; IP54 rated

OPTIONAL ACCESSORIES

M12 Connector & Cable

Connector

- **ECONM12-04D(M)-C-180** 4 pin M12 (Male) D-coded 180 degree crimp type connector for data
- **ECONM12-08X(M)-SPEEDCON** 8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON

Cable

- **ECAB124030MJS** 4 pin M12 (Male) D-coded 180 degree RJ45 STP cable for data, 300cm
- **ECABM12X83MSTP** 8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm
- **ECONM12-5P(F)70CM CABLE** 5 pin M12 (Female) A-coded 90 degree cable for power supply, 70cm

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2024 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.