

T(P)ES-0216T

16 FE + 2 GE (PoE) M12 Unmanaged Ethernet Switch



OVERVIEW

Lantech T(P)ES-0216T is an unmanaged Ethernet switch featuring 16 10/100 Base-TX ports and 2 Gigabit copper ports with M12 connectors. Designed with an IP54-rated enclosure, it provides reliable protection against dust and water, meeting the stringent reliability requirements of industrial rolling stock applications.

Redundant dual 24VI/24TVI input with max PoE budget; inrush current prevention and polarity reverse protection

T(P)ES-0216T supports dual power inputs with voltage ranges of 9–36VDC for the 24VI model and 16.8–56VDC for the 24TVI model. Featuring galvanic isolation between input power, PoE, and all Ethernet ports, the PoE variant delivers up to 120W from internal power. Its redundant power input design includes inrush current prevention and polarity reversal protection to ensure stable and reliable operation.

Sleep Mode & efficient PoE timer under Ignition-Off State

Compliant with ITxPT standards, the -IGN model features a 60-minute standby mode after ignition-off, maintaining network operation before entering sleep mode(0.048W)—preventing unnecessary reboots when power is restored.

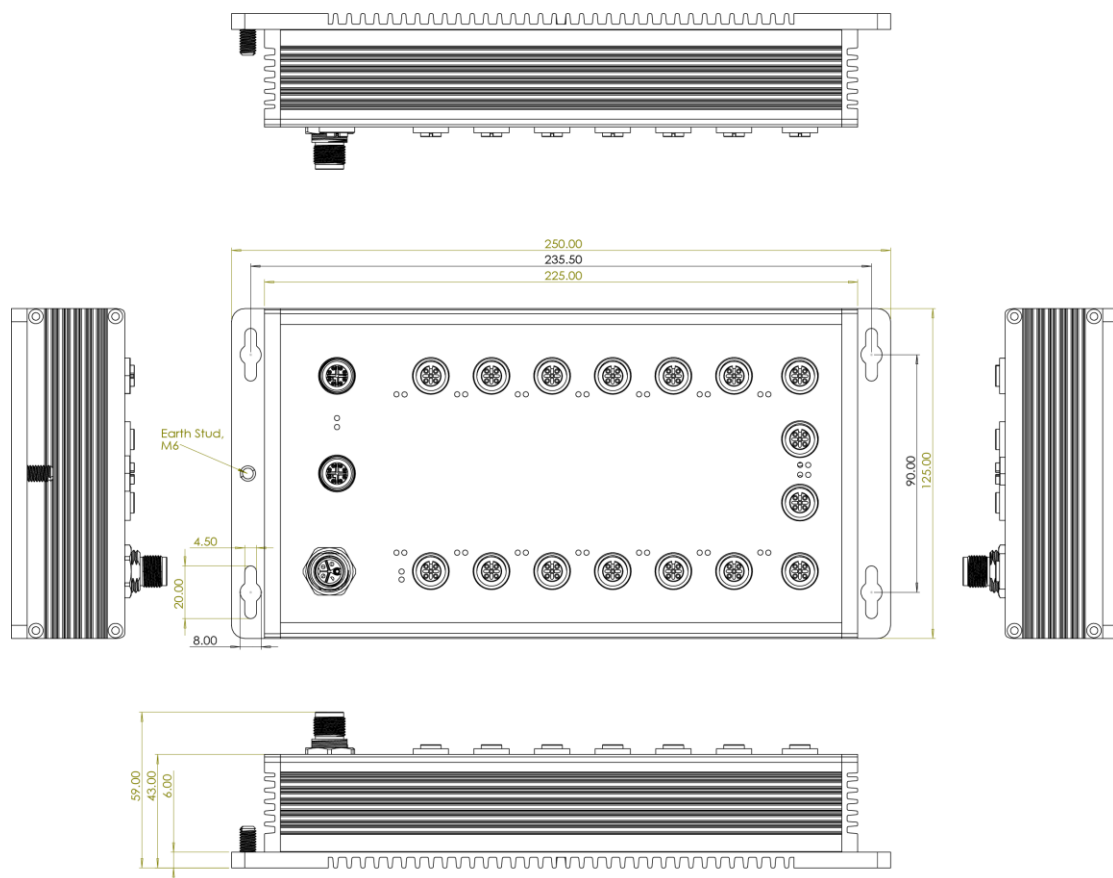
The PoE ignition model also supports a configurable PoE timer, with a default delay of 10 minutes after ignition-off.

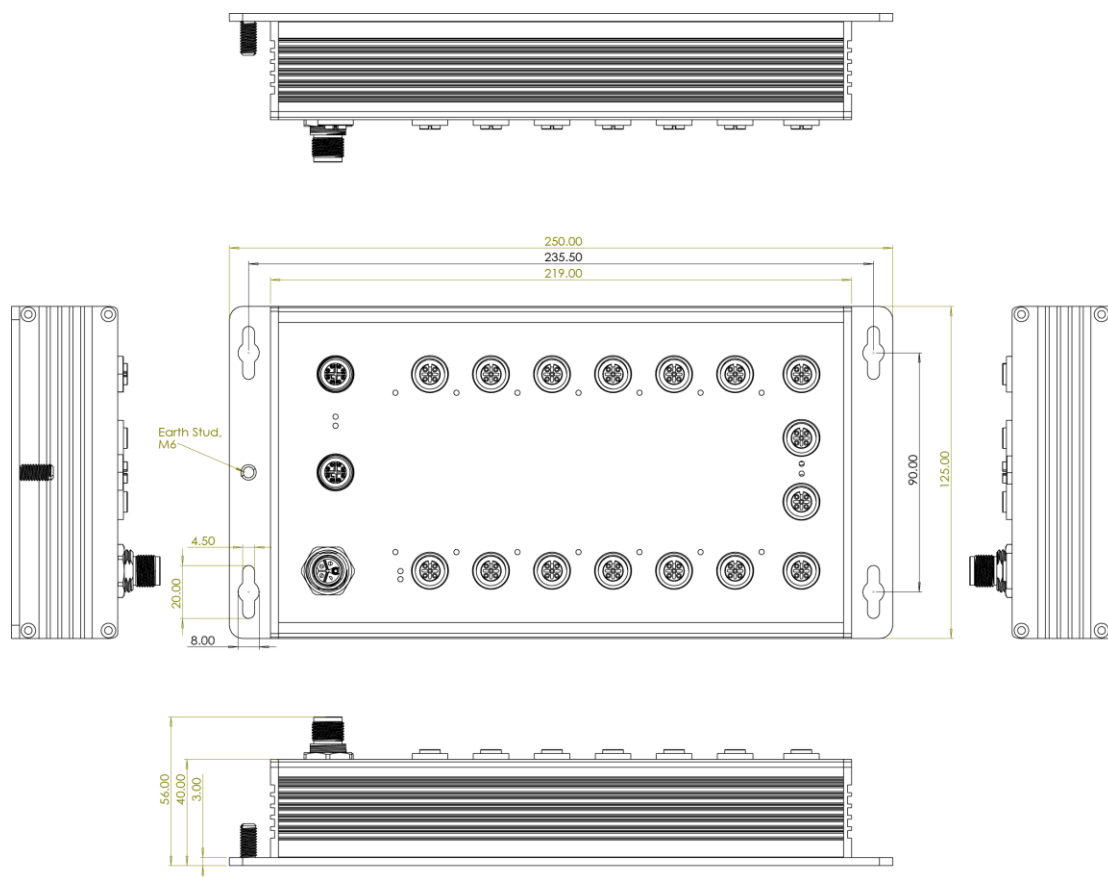
E-marking* certificate, ITxPT*; ISO 7637-2 compliant and extended working temperature; ISO


16750-2 P5A compliant

T(P)ES-0216T has passed rigorous industrial EMI, safety, and mechanical tests, including free-fall, shock, and vibration, ensuring reliable operation in harsh environments. The switch complies with ITxPT* public transport standards and ISO 7637-2, providing protection against high-voltage surges commonly encountered during vehicle crank starts.

T(P)ES-0216T supports an extended operating temperature range of -40°C to 75°C (-IGN-E; -24TVI model). E-marking* certification makes it ideal for buses, carriages, and other vehicle applications, as well as industrial sites with 12V or 24V power where IP surveillance or VoIP connectivity is required. It also meets ISO 16750-2 P5A to resist motor pulse voltages, effectively minimizing the impact of high-frequency pulse voltages commonly generated by motor applications.

DIMENSIONS (unit=mm)**PoE model**

Non-PoE model**SPECIFICATIONS****Hardware Specification**

IEEE Standard	IEEE802.3 10BASE-T Ethernet IEEE802.3u 100BASE-T Ethernet IEEE802.3ab 1000Base-T Ethernet IEEE802.3x Flow Control and Back Pressure IEEE802.3at/af Power over Ethernet (For PoE Model)		
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port	Power Supply	Dual input 9~36VDC (24VI model) 16.8~56VDC (24TVI model)
Mac Address	8K MAC address table	Power Consumption	8W without PoE
Connector	10/100TX: 16 x M12, 4-pole D-coded connector, Female with auto MDI/MDI-X function 10/100/1000T: 2 x M12, 8-pole X-coded connector, Female with auto MDI/MDI-X function Power connector: 1 x M12, 5-pole K coded, Male	Power Budget	Total 120W @ 24VDC
LED	Per unit: Power 1 (Green), Power 2 (Green), Ethernet: Link/Activity (Green) PoE: (Green)	Operating Humidity	5% to 95% (Non-condensing)
PoE pin assignment	M12 port # 1~ # 16 support IEEE 802.3at/af End-point. Per port provides up to 30W	Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F) (-IGN-E; -24TVI model) -20°C ~ 60°C (-4°F ~ 140°F) (-IGN model)
		Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
		Case Dimension	Aluminum case, IP54 rated 250mm(W)x125mm(H)x59mm(D) (PoE models) 250mm(W)x125mm(H)x56mm(D) (Non-PoE models)
		Weight	TBC
		Installation	Wall Mount Design
		EMC	FCC Part 15, Subpart B ICES-003 Issue 7, EN 55035:2017/A11:2020, EN 55032:2015/A11:2020,

IEC 61000-4-2:2008, IEC 61000-4-3:2020, IEC 61000-4-4:2012, IEC 61000-4-5:2014+AMD1:2017 CSV, IEC 61000-4-6:2023, IEC 61000-4-8:2009, IEC 61000-6-2:2016, IEC 61000-6-4:2018, EN IEC 61000-6-2:2019, EN IEC 61000-6-4:2019, BS EN 55035:2017+A11:2020, BS EN 55032:2015+A11:2020	<table> <tr> <td>Stability Testing</td><td>EN 61373:2010 (Shock and Vibration)</td></tr> <tr> <td>Verifications & Report</td><td>EN 50155*:2021, EN 50121-4:2016/A1:2019, EN 50121-3-2:2016/A1:2019, EN 50124-1:2017, EN 45545-1, EN 45545-2 Fire & Smoke verification</td></tr> <tr> <td>Vehicle certificate</td><td>E24 marking* (24VI model), R118 ITxPT* labeled (24VI-IGN model)</td></tr> <tr> <td>MTBF</td><td>335,813 hrs (standards: IEC 62380)</td></tr> </table>	Stability Testing	EN 61373:2010 (Shock and Vibration)	Verifications & Report	EN 50155*:2021, EN 50121-4:2016/A1:2019, EN 50121-3-2:2016/A1:2019, EN 50124-1:2017, EN 45545-1, EN 45545-2 Fire & Smoke verification	Vehicle certificate	E24 marking* (24VI model), R118 ITxPT* labeled (24VI-IGN model)	MTBF	335,813 hrs (standards: IEC 62380)
Stability Testing	EN 61373:2010 (Shock and Vibration)								
Verifications & Report	EN 50155*:2021, EN 50121-4:2016/A1:2019, EN 50121-3-2:2016/A1:2019, EN 50124-1:2017, EN 45545-1, EN 45545-2 Fire & Smoke verification								
Vehicle certificate	E24 marking* (24VI model), R118 ITxPT* labeled (24VI-IGN model)								
MTBF	335,813 hrs (standards: IEC 62380)								

*Future release
**Optional

ORDERING INFORMATION

All model packages include M12 caps and wall mount brackets. All standard models are non-coating, optional coating models are available with -C model name; for push-pull inner-lock connector model add -PP

- **TPES-0216T-16-54-24VI-IGN-E.....P/N: 8361-042**
16 10/100TX PoE at/af + 2 1G IP54 rated unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input w/ PoE & Ethernet galvanic isolation; w/ignition
- **TPES-0216T-16-54-24VI-E.....P/N: 8361-0422**
16 10/100TX PoE at/af + 2 1G IP54 rated unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; w/ PoE & Ethernet galvanic isolation
- **TPES-0216T-16-54-24TVI-E.....P/N: 8361-0424**
16 10/100TX PoE at/af + 2 1G IP54 rated EN50155 Ethernet Switch w/M12 connectors; -40°C to 75°C; 16.8~56VDC dual input; w/ PoE & Ethernet galvanic isolation
- **TES-0216T-54-24VI-IGN-E.....P/N: 8361-0421**
16 10/100TX + 2 1G IP54 rated unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input w/ Ethernet galvanic isolation; w/ignition
- **TES-0216T-54-24VI-E.....P/N: 8361-0423**
16 10/100TX + 2 1G IP54 rated unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; w/ Ethernet galvanic isolation
- **TES-0216T-54-24TVI-E.....P/N: 8361-0425**
16 10/100TX + 2 1G IP54 rated EN50155 Ethernet Switch w/M12 connectors; -40°C to 75°C; 16.8~56VDC dual input; w/ Ethernet galvanic isolation

OPTIONAL ACCESSORIES

M12 Connector & Cable

Connector

- **4106-00000097-001**
ECONM12-05K(F)-S-180
5 pin M12 (Female) K-coded 180 degrees screw type connector for power supply
- **ECONM12-04D(M)-C-180**
4 pin M12 (Male) D-coded 180 degree crimp type connector for data
- **ECONM12-08X(M)-SPEEDCON**
8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON

Cable

- **4106-00000096-001**
ECABM12-05K(F)-90-1.5M
5 pin M12 (Female) K-coded 90 degrees 1.5M cable for power supply
- **ECAB124030MJS**
4 pin M12 (Male) D-coded 180 degree RJ45 STP cable for data, 300cm
- **ECABM12X83MSTP**
8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm
- **ECONM12-05K(F) to MCP 6P-20CM CABLE**
5 pin M12 (Female) K-coded 180 degree to 6 pin MCP power cable, 20cm (For ignition models)

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2025 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 21 AUG 2025
The revised authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.