

# T(P)ES-L6416XFT

**16 FE + 2 10G Copper + 2 10G Fiber Q-ODC OM3  
(w/8/10/16 PoE), EN50155 OS3 Managed Ethernet Switch; WVI /  
24V / 24TVI input**



## OVERVIEW

Lantech T(P)ES-L6416XFT is a high performance OS3 EN50155 Ethernet switch with 16 10/100TX + 2 1G/2.5G/5G/10G Copper + 2 1G/10G Fiber Q-ODC OM3. PoE model has 8/16 or w/10 PoE (incl. 8 10/100TX + 2 uplink 10GT copper) 802.3af/at ports which provides advanced security function for network aggregation deployment. The OS3 platform supports L3\*\*/L2, IPv6/v4, standardized ITU G.803 ring, IEC62443-4-2 semi-compliance cybersecurity, ETBN TTDP\*\* protocol suitable for the future-proof modern network. Unique AUTO-FEED configuration and Health diagnostic snapshot maintenance to ensure reliable and easy onboard network deployment. It's WebGUI and complete CLI interface make configuration straightforward for all skill levels. Additionally, the OPEN API document format enhances central management efficiency, making it ideal for fleet management. Compliance with EN50155 and EN45545-2 certifications assured the product meets world-class standards for rail onboard performance and reliability.

### Dual WVI / 24V / 24TVI input with max PoE budget and Inrush current protection

The switch accepts 16.8~137.5VDC (WVI model); 9~36VDC (24V model); 16.8~56VDC (24TVI model) dual input with Ethernet and PoE galvanic isolation and PoE model can feed 54V output for PoE feeding with 80W budget. The inrush current on initial power up can be limited lower than 10 x nominal current.

### Up to 8/10/16 PoE at/at ports w/advanced PoE management and PoE galvanic isolation; Ethernet power input galvanic isolation

Compliant with 802.3af/at standard, the PoE model is able to feed each PoE port up to 30 Watt at each PoE port for various IP PD devices. It supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine timetable. Each PoE ports can be Enabled/disabled, get the voltage, current, Watt, and temperature info displayed on WebUI.

Galvanic isolation between power input and Ethernet power system, also the PoE galvanic isolation provides insulation between the power input to PoE Ethernet ports, preventing cabling and grounding incidents from damaging the Ethernet switch. The efficiency of the galvanically decoupled voltage converters can reach above 90%.

***Lantech OS3 Platform with complete L2 management and upgradable optional L3 & communication protocols***

The switch runs Lantech OS3 platform which is powerful with complete Layer 2 management features and optional upgradable for future expansion, such as Layer 3 Lite, Layer 3, IEC61375-2-5 (ETBN), etc. To learn more about the Lantech OS3 Platform, please refer to **Lantech OS3/OS4 Software Datasheet**  
([https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3\\_OS4.pdf](https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3_OS4.pdf))

***Enhanced cybersecurity features with IEC 62443-4-1 certification, optional semi-compliant with IEC 62443-4-2***

Lantech OS3 platform is designed with high standard of cybersecurity to prevent the threats from network attacks such as DDoS attacks. To ensure the safety and reliability of communication networks, Lantech develops our products under strict international security standards and is certified with IEC 62443-4-1 network security standards. The optional cybersecurity features that are compliant with IEC 62443-4-2 include vulnerability checking, encrypted files, public key management, strong password enforcement, account management, penetration and stress testing. Among many others, totaling up to 90 security measures. To learn more about Lantech cybersecurity software solution, please refer to **Lantech OS3/OS4 Software Datasheet**  
([https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3\\_OS4.pdf](https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3_OS4.pdf))

***Support Open API document for Restful API for better switch performance***

The switch supports Restful API that uses JSON format to access and use data for GET, PUT, POST and DELETE types to avoid traditional SNMP management occupying CPU utilization. The OPEN API document format for Restful API can greatly improve central management efficiency for various applications including fleet management and AIOT.

***Miss-wiring avoidance, node failure protection, Loop protection***

The switch also embedded several features for strong and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, the switch being able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

***User-friendly GUI, Auto topology drawing, Enhanced Environmental Monitoring***

The user-friendly UI, innovative auto topology drawing and topology demo makes the switch much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line. It supports enhanced environmental monitoring for actual input voltage, current, ambient temperature and total power load.

***Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN***

Lantech OS3 Ethernet switches comply with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (TBN).

***Auto feed configuration for swapped new switches for Seamless Network Maintenance, USB port for backup, restoring configuration and upgrading firmware, snapshot switch information for trouble-shooting analysis***

The switch supports auto-feed configuration features that revolutionize network switch setup and management. It ensures that new and replacement switches automatically receive the correct configurations without manual intervention. Additionally, it supports the traditional way of uploading or downloading the firmware / configuration through a USB dongle. With the distinctive Snapshot feature, the switch can gather data, including port statistics, system core information, configuration, and event logs, either at a specific point in time or by scheduling, to address switch issues and analyze the root cause promptly.

***Event log & message; 2DI + 2DO; Factory default pin***

The switch provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the outside alarm and switch will send alert information to IP network with traps and traps. The factory reset pin can restore the setting back to factory default.

***Optional smart bypass protection on dual 10G copper ports***

The bypass relay is set to bypass the switch to the next one when power is off to prevent network disruption. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. Optional smart bypass (one pair) can be activated when switch encounters power failure. (-BT model)


***EN50155, EN45545-2; EN61373 compliance; Rugged design with high ESD protection***

The switch is designed to meet with critical network environment with IP54/IP67 aluminum enclosure and M12 connectors for water proof. The switch passed serious tests under extensive Industrial EMI and Safety standards. With EN45545-2 Fire & Smoke and EN50155 verification, it is best switch for railway on-board/track side, vehicle, and mining applications. For more usage flexibilities, the switch supports wide operating temperature from -40°C to 70°C (85°C operation for 10min), which is compliant with the EN50155 Operating Temperature Range Requirement Class OT4.

***E-marking certificate***

The E-marking certificate (24V model) makes it the most suitable switch for bus, carriage, other vehicles application as well as for industrial areas where the power source is limited with 24V but has demand of IP surveillance or VoIP applications.

## DIMENSIONS (unit=mm)

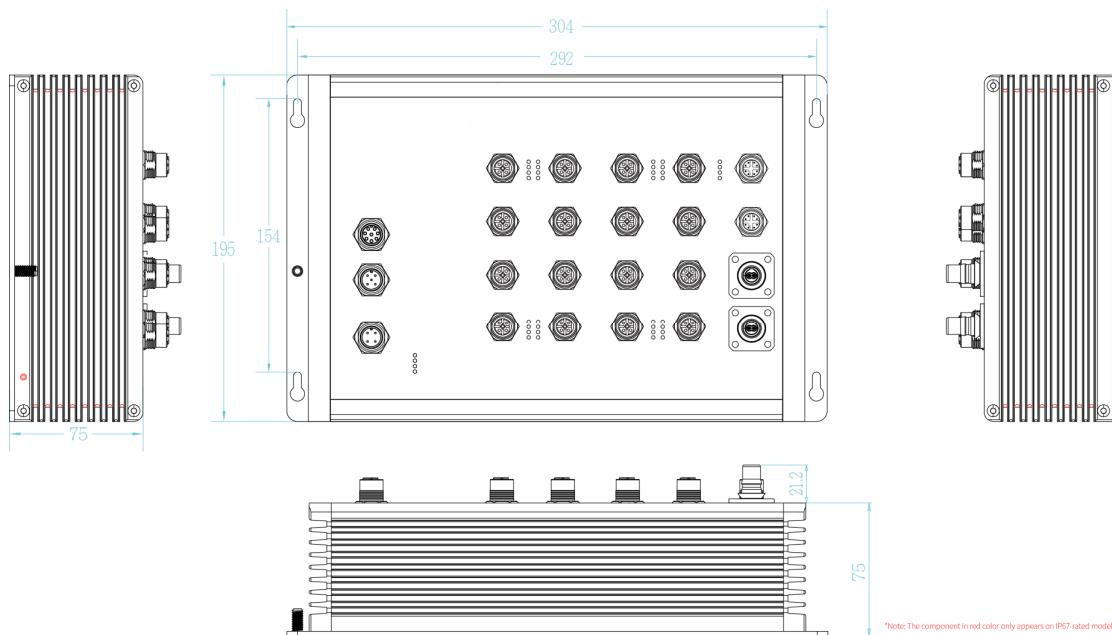

## SPECIFICATIONS

### Hardware Specification

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3ak 10Gbase-T IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet
Switch Architecture	Back-plane (Switching Fabric): 83.2Gbps
Mac Address	16K MAC address table
Jumbo frame	10KB
Connectors	10/100TX: 16 x M12 4-pole D-coded with Auto MDI/MDI-X function 1G/2.5G/5G/10G Copper: 2x M12 8-pole X-coded 1G/10G FX: 2x ports Q-ODC OM3 with multi-mode/single-mode fiber Power Input connector: 1 x M12 4-pole Male A-coded Reset/Console/USB : 1 x M12 8-pole A-coded DIDO: 1 x M12 5-pole A-coded
Network Cable	10Base-T: 4-pair STP Cat3 cable 100Base-TX: 4-pair STP Cat5/5e cable 1000Base-T: 4-pair STP Cat5e cable; 2.5G Copper: 4-pair STP Cat5e cable 10G Copper: 4-pair STP Cat6/6A cable  <b>1G/10G fiber:</b> Multi-mode: 0 to 300 m, 850 nm (OM3 50/125 µm); Single-mode: 0 to 2 km, 1310 nm (9/125 µm)

LED	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) 10/100TX Ethernet port: Link/Activity (Green) 1G/2.5G/5G/10G port: speed (1G/2.5G/5G: Yellow; 10G: Orange) 1G/10G fiber: Link/Act (Orange) PoE : Link/Act (Green) (PoE model)
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 80 VDC, 50mA
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-40°C~70°C / -40°F~158°F (85°C operation for 10min.)
Storage Temperature	-40°C~85°C / -40°F~185°F
Power Supply	Dual DC input 16.8~137.5VDC (WVI model) ; 9~36VDC (24V model) ; 16.8~56VDC (24TVI model) (PoE galvanic isolation for PoE models; Ethernet galvanic isolation for all models)
PoE Budget (PoE model)	80W@24VDC Higher PoE budget can be applied upon request. **
PoE pin assignment (PoE model)	M12 port #1~#8/16 (-8/-16 model) ; #17~#18 (-10 model) ; support IEEE 802.3at/af End-point ; Alternative A mode
Power Consumption	max. 40.6W exclude PoE load
Dimensions	IP54/IP67 model: Aluminum case 304mm(W)x195mm(H)x96.2mm(D)
Weight	3.45kgs
Installation	Wall Mount Design
EMI & EMS	FCC Part 15 Class A, IEC/EN61000-6-2 CE EN55032 Class A

	CE EN55024 CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE EN61000-4-8 (Magnetic field) Level 3 BS EN61000-4-2, BS EN61000-4-3, BS EN61000-4-4, BS EN61000-4-5, BS EN61000-4-6, BS EN61000-4-8, BS EN55032, BS EN55024	Stability Testing <b>EN61373 (Shock and Vibration)</b> Vehicle Certificate <b>E13 marking (UN ECE R10) (24V model)</b> MTBF <b>TBC (standards: IEC 62380)</b> Bypass** One pair bypass module on 10GT ports to pass to next switch in case of power failure
Verifications	EN50155/EN50121-3-2/EN50121-4; EN45545-1, EN 45545-2 Fire & Smoke verification	<b>Software Specification</b> <b>Lantech OS3/OS4 Platform</b> Download Software Datasheet <a href="https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3_OS4.pdf">https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3_OS4.pdf</a>

\*Future release

\*\*Optional

## ORDERING INFORMATION

All model packages include M12 caps. For optional bypass add -BT (one pair) to end of model names. For Coating add -C to end of model names.

- **TPES-L6416XFT-8-QMM-54-WVI.....P/N: 8361-533**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-8-QSM-54-WVI.....P/N: 8361-5332**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-10-QMM-54-WVI.....P/N: 8361-5333**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-10-QSM-54-WVI.....P/N: 8361-5334**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-16-QMM-54-WVI.....P/N: 8361-5331**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-16-QSM-54-WVI.....P/N: 8361-5335**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TES-L6416XFT-QMM-54-WVI.....P/N: 8361-5336**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; EN50155 OS3 Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ galvanic isolation
- **TES-L6416XFT-QSM-54-WVI.....P/N: 8361-5337**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ galvanic isolation
- **TPES-L6416XFT-8-QMM-67-WVI.....P/N: 8361-5338**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-8-QSM-67-WVI.....P/N: 8361-5339**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-10-QMM-67-WVI.....P/N: 8361-6682**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-10-QSM-67-WVI.....P/N: 8361-6683**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-16-QMM-67-WVI.....P/N: 8361-6684**  
 16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic

- isolation
- **TPES-L6416XFT-16-QSM-67-WVI.....P/N: 8361-6685**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TES-L6416XFT-QMM-67-WVI.....P/N: 8361-6686**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; EN50155 OS3 Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ galvanic isolation
- **TES-L6416XFT-QSM-67-WVI.....P/N: 8361-6687**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ galvanic isolation
- **TPES-L6416XFT-8-QMM-54-24V.....P/N: 8361-53301**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-8-QSM-54-24V.....P/N: 8361-53321**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-10-QMM-54-24V.....P/N: 8361-53331**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-10-QSM-54-24V.....P/N: 8361-53341**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-16-QMM-54-24V.....P/N: 8361-53311**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-16-QSM-54-24V.....P/N: 8361-53351**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TES-L6416XFT-QMM-54-24V.....P/N: 8361-53361**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; EN50155 OS3 Managed Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ galvanic isolation
- **TES-L6416XFT-QSM-54-24V.....P/N: 8361-53371**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ galvanic isolation
- **TPES-L6416XFT-8-QMM-67-24V.....P/N: 8361-53381**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-8-QSM-67-24V.....P/N: 8361-53391**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-10-QMM-67-24V.....P/N: 8361-66821**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-10-QSM-67-24V.....P/N: 8361-66831**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-16-QMM-67-24V.....P/N: 8361-66841**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-16-QSM-67-24V.....P/N: 8361-66851**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
- **TES-L6416XFT-QMM-67-24V.....P/N: 8361-66861**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; EN50155 OS3 Managed Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ galvanic isolation
- **TES-L6416XFT-QSM-67-24V.....P/N: 8361-66871**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 9V~36VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ galvanic isolation
- **TPES-L6416XFT-8-QMM-54-24TVI.....P/N: 8361-53302**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-8-QSM-54-24TVI.....P/N: 8361-53322**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/8 PoE at/af EN50155 OS3

- Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
- **TPES-L6416XFT-10-QMM-54-24TVI.....P/N: 8361-53322**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/10 PoE at/af incl. 2 10GT  
EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
  - **TPES-L6416XFT-10-QSM-54-24TVI.....P/N: 8361-53342**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/10 PoE at/af incl. 2 10GT  
EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
  - **TPES-L6416XFT-16-QMM-54-24TVI.....P/N: 8361-53312**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
  - **TPES-L6416XFT-16-QSM-54-24TVI.....P/N: 8361-53352**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ PoE galvanic isolation
  - **TES-L6416XFT-QMM-54-24TVI.....P/N: 8361-53362**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; EN50155 OS3 Managed Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ galvanic isolation
  - **TES-L6416XFT-QSM-54-24TVI.....P/N: 8361-53372**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP54 housing w/ galvanic isolation
  - **TPES-L6416XFT-8-QMM-67-24TVI.....P/N: 8361-53382**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
  - **TPES-L6416XFT-8-QSM-67-24TVI.....P/N: 8361-53392**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
  - **TPES-L6416XFT-10-QMM-67-24TVI.....P/N: 8361-66822**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
  - **TPES-L6416XFT-10-QSM-67-24TVI.....P/N: 8361-66832**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/10 PoE at/af incl. 2 10GT EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
  - **TPES-L6416XFT-16-QMM-67-24TVI.....P/N: 8361-66842**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
  - **TPES-L6416XFT-16-QSM-67-24TVI.....P/N: 8361-66852**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed PoE Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ PoE galvanic isolation
  - **TES-L6416XFT-QMM-67-24TVI.....P/N: 8361-66862**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Multimode Fiber Q-ODC OM3 300M; EN50155 OS3 Managed Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ galvanic isolation
  - **TES-L6416XFT-QSM-67-24TVI.....P/N: 8361-66872**  
16 10/100/1000T + 2 10G Copper M12 X-coded + 2 1G/10G Single mode Fiber Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 16.8V~56VDC dual input ; -40~70C/-40~158F ; IP67 housing w/ galvanic isolation

## OPTIONAL ACCESSORIES

### Software package

Please refer to the software datasheet ([https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3\\_OS4.pdf](https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3_OS4.pdf))

### M12 Connector & Cable

#### Connector

- **ECONM12-04A(F)-C-180** 4 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-08A(M)-180** 8 pin M12 (Male) A-coded 180 degree crimp type connector for reset/console/USB
- **ECONM12-05A(M)-C-180** 5 pin M12 (Male) A-coded 180 degree crimp type connector for DI/DO
- **ECONM12-08X(M)-SPEEDCON** 8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON
- **ECONM12-04D(M)-C-180** 4 pin M12 (Male) D-coded 180 degree crimp type connector for data

#### Cable

- **ECONM12-4P(F)1.5M CABLE** 4 pin M12 (Female) A-coded 90 degree cable for power supply, 150cm
- **ECONM12-08M2-CONSOLE** 8 pin M12 (Male) A-coded 180 degree to RS232 cable for console, 150cm
- **ECABM12X83MSTP** 8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm
- **ECAB124030MJS** 4 pin M12 (Male) D-coded 180 degree RJ45 STP cable for data, 300cm

- **ECABM02-QOP2-3.0-MM-OM3** Q-ODC 2 plug/LC multi-mode fiber, MM-OM3, 300cm
- **ECABM02-QOP2-3.0-SM-OS2** Q-ODC 2 plug/LC single-mode fiber, SM-OS2, 300cm

**Others**

- **M12 to USB interface adapter** 8 pin M12 (Male) A-coded 180 degree M12 to USB 2.0 interface adapter, 8cm
- **USB 2.0 Ethernet Adapter** USB 2.0 to RJ45 Ethernet Adapter
- **ECONM12-08(M) TO DB9+USB2.0-1.5M CABLE** 8 pin M12 (Male) A-coded 180 degree M12 to USB2.0 to DB9 (Female) cable, 150cm

**Lantech Communications Global Inc.**[www.lantechcom.tw](http://www.lantechcom.tw)[info@lantechcom.tw](mailto:info@lantechcom.tw)

© 2025 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 12 FEB 2025

The revise authority rights of product specifications belong to Lantech Communications Global Inc.

In a continuing effort to improve and advance technology, product specifications are subject to change without notice.