

# T(P)GS-0008CA

## 8 10/100/1000T (PoE at/af) EN50155 Ethernet Switch

- IEEE802.3at/af up to 30W PoE output (For PoE Model)
- Dual power inputs 9~36V (24V model) or 16.8~56V (24TVI model) ; w/ (PoE) galvanic isolation (For PoE Model)
- Wide Operating Temperature from -40°C to 75°C
- IP54/IP41 Aluminum housing for best heat dissipation and preventing moist ingress
- EN50155/50121-3-2/50121-4 and EN45545-2 Fire & Smoke verification
- E-marking certificate for vehicle application (24V model)
- ITxPT labeled w/ ignition function (24V-IGN model)



## OVERVIEW

Lantech T(P)GS-0008CA is an 8 10/100/1000 Base-T with M12-connectors EN50155 unmanaged Ethernet switch with IP54/IP41 rated protection which meets the high reliability requirements demanded by industrial rolling stock applications.

### **E-marking certificate, ITxPT; ISO 7637-2 compliant and extended working temperature**

The T(P)GS-0008CA is designed to meet with critical network environment with IP54 enclosure and M12 connectors for protection against dust and water. It has passed harsh environmental testing to comply with Industrial EMI and Safety standards as well as stability testing such as Free fall, Shock,

and vibration. It is labeled with ITxPT public transport standards and also compliant with ISO 7637-2 which protects switch from being damaged by high voltage that could be found at vehicle cranky start.

For a greater flexibility in application the T(P)GS-0008CA supports an extended operating temperature range from -40°C to 75°C.


The E-marking certificate makes it the most suitable switch for bus, carriage, other vehicles application as well as for industrial areas where the power source is limited with 12V or 24V but has demand of IP surveillance or VoIP applications.

## FEATURES & BENEFITS


- 8 10/100/1000T EN50155 Unmanaged Ethernet Switch with M12 connectors and IP54 rated protection
- Supports IEEE802.3at/af feeding power up to 30W per PoE port (For PoE Model)
- Back-plane (Switching Fabric): 16 Gbps
- 8K MAC address table
- Wide Operating Temperature (-40°C ~75°C)
- Din rail\*\* and wall mount design
- E-marking certificate for vehicle application (24V model)
- EN50155/50121-3-2/50121-4 and EN45545-2 Fire & Smoke verification
- ITxPT labeled w/ ignition function (24V-IGN model)

**DIMENSIONS (unit=mm)**

**IP54 model**


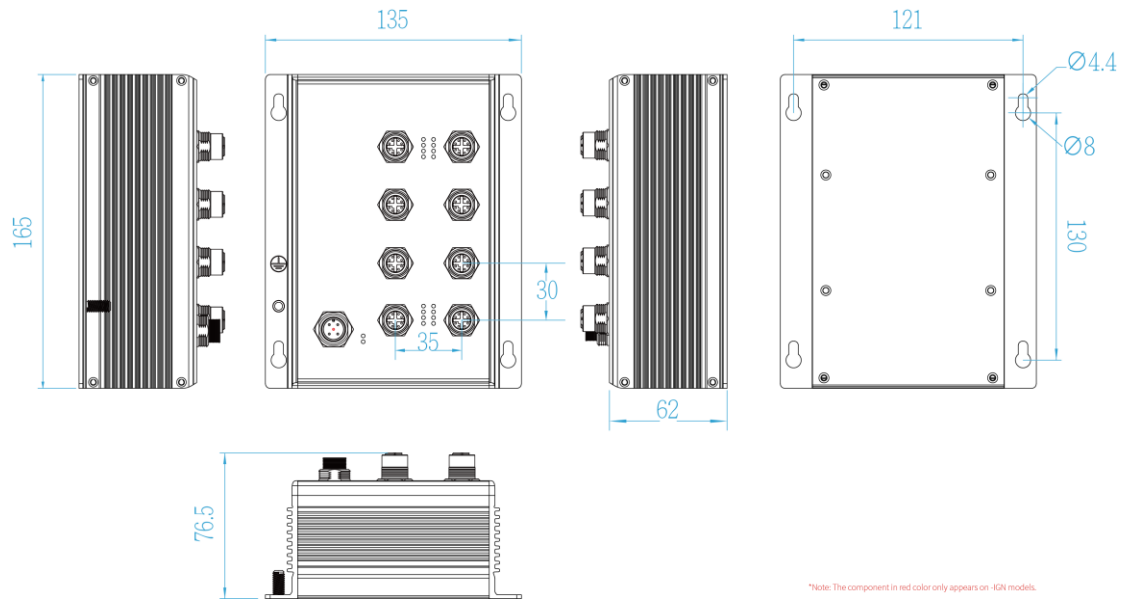


**IP41 model**

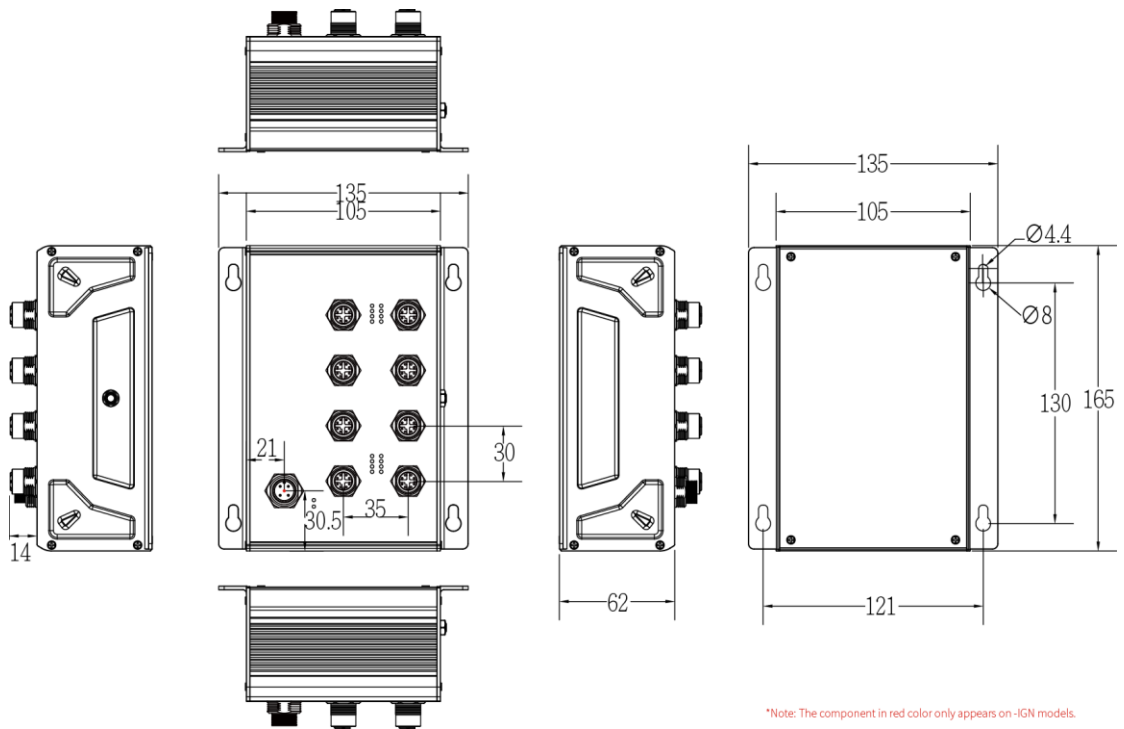

**SPECIFICATIONS**

Hardware Specification		Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port
IEEE Standard	IEEE802.3 10BASE-T Ethernet	Mac Address	8K MAC address table
	IEEE802.3u 100BASE-T Ethernet	Connector	10/100/1000T: 8 x M12, 8-pole X-coded, Female with auto MDI/MDI-X function Power connector: 1 x M12, 4-pole A coded, Male
	IEEE802.3ab 1000Base-T		
	IEEE802.3x Flow Control and Back Pressure		
	IEEE802.3at/af Power over Ethernet (For PoE Model)		

	1 x M12, 5-pole A-coded, Male (-IGN model) 	Case Dimension Aluminum case, 135mm(W)x165mm(H)x76.5mm(D) (IP54 model) 135mm(W)x165mm(H)x76mm(D) (IP41 model)
Rotary Switch	Rotary switch for delay time configuration (-24V-IGN model)	Weight 700g
LED	Per unit: Power 1 (Green), Power 2 (Green), Ethernet: Link/Activity (Green) PoE: (Green)	Installation Wall Mount Design
PoE pin assignment	M12 port # 1~ # 8 support IEEE 802.3at/af End-point. Per port provides up to 30W (-6 model: M12 port #1~#6 support IEEE 802.3at/af End-point) 10/100/1000T 	EMC FCC Class A, CE EN55011, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8 (Magnetic Field), CE EN61000-6-2, CE EN61000-6-4, CE EN55032, CE EN55024 BS EN61000-4-2, BS EN61000-4-3, BS EN61000-4-4, BS EN61000-4-5, BS EN61000-4-6, BS EN61000-4-8, BS EN55032, BS EN55024
Power Supply	Dual input 9~36VDC (24V model) 16.8~56VDC (24TVI model)	Stability Testing EN61373 (Shock and Vibration)
Power Consumption	5W without PoE load (24V model) 10W without PoE load (WV model)	Verifications & Report EN50155/EN50121-3-2/EN50121-4 verification EN 45545-1, EN 45545-2 Fire & Smoke verification
Power Budget	Total 65W @ 24VDC and above Higher PoE budget can be applied upon request. **	Vehicle certificate E13 marking (24V model) ITxPT labeled (24V-IGN model)
Operating Humidity	5% to 95% (Non-condensing)	MTBF 1,245,229 Hrs (IEEE 62830 standards)
Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)	Warranty 5 years
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)	

\*\*Optional

## ORDERING INFORMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model name.

- **TPGS-0008CA-54-24V.....P/N: 8351-12544**  
 8 10/100/1000T IP54 rated PoE at/af unmanaged Ethernet Switch w/M12 connectors; 9~36VDC dual power inputs; E-marking certified; -40°C to 75°C ; w/ PoE galvanic isolation
- **TPGS-0008CA-6-54-24V.....P/N: 8351-12541**  
 8 10/100/1000T w/6 PoE at/af unmanaged Ethernet Switch IP54 rated w/M12 connectors; 9~36VDC dual power inputs; E-marking certified; -40°C to 75°C ; w/ PoE galvanic isolation
- **TPGS-0008CA-54-24TVI.....P/N: 8351-12543**  
 8 10/100/1000T IP54 rated EN50155 PoE at/af unmanaged Ethernet Switch w/M12 connectors; 16.8~56VDC dual power inputs; -40°C to 75°C ; w/ PoE galvanic isolation
- **TPGS-0008CA-6-54-24TVI.....P/N: 8351-12542**  
 8 10/100/1000T w/6 EN50155 PoE at/af unmanaged Ethernet Switch IP54 rated w/M12 connectors; 16.8~56VDC dual power inputs; -40°C to 75°C ; w/ PoE galvanic isolation
- **TPGS-0008CA-54-24V-IGN.....P/N: 8351-13411**  
 8 10/100/1000T IP54 rated EN50155 PoE at/af unmanaged Ethernet Switch w/M12 connectors; 9~36VDC dual power inputs; E-marking and ITxPT certified; -40°C to 75°C w/ignition ; w/ PoE galvanic isolation
- **TPGS-0008CA-6-54-24V-IGN.....P/N: 8351-12551**  
 8 10/100/1000T w/6 PoE at/af unmanaged Ethernet Switch IP54 rated w/M12 connectors; 9~36VDC dual power inputs; E-marking and ITxPT certified; -40°C to 75°C w/ignition ; w/ PoE galvanic isolation
- **TPGS-0008CA-41-24V.....P/N: 8351-1257**  
 8 10/100/1000T IP41 rated PoE at/af unmanaged Ethernet Switch w/M12 connectors; 9~36VDC dual power inputs; E-marking certified; -40°C to 75°C ; w/ PoE galvanic isolation
- **TPGS-0008CA-6-41-24V.....P/N: 8351-12574**  
 8 10/100/1000T w/6 PoE at/af unmanaged Ethernet Switch IP41 rated EN50155 w/M12 connectors; 9~36VDC dual power inputs; E-marking certified; -40°C to 75°C ; w/ PoE galvanic isolation
- **TPGS-0008CA-41-24TVI.....P/N: 8351-12572**  
 8 10/100/1000T IP41 rated EN50155 PoE at/af unmanaged Ethernet Switch w/M12 connectors; 16.8~56VDC dual power inputs; -40°C to 75°C ; w/ PoE galvanic isolation
- **TPGS-0008CA-6-41-24TVI.....P/N: 8351-12573**  
 8 10/100/1000T w/6 PoE at/af EN50155 unmanaged Ethernet Switch IP41 rated EN50155 w/M12 connectors; 16.8~56VDC dual power inputs; -40°C to 75°C ; w/ PoE galvanic isolation

- **TPGS-0008CA-41-24V-IGN.....P/N: 8351-1256**  
8 10/100/1000T IP41 rated EN50155 PoE at/af unmanaged Ethernet Switch w/M12 connectors; 9~36VDC dual power inputs; E-marking and ITxPT certified; -40°C to 75°C w/ignition ; w/ PoE galvanic isolation
- **TPGS-0008CA-6-41-24V-IGN.....P/N: 8351-12561**  
8 10/100/1000T w/6 PoE at/af unmanaged Ethernet Switch IP41 rated w/M12 connectors; 9~36VDC dual power inputs; E-marking and ITxPT certified; -40°C to 75°C w/ignition ; w/ PoE galvanic isolation
- **TGS-0008CA-54-24V.....P/N: 8351-5871**  
8 10/100/1000T IP54 rated unmanaged Ethernet Switch w/M12 connectors; 9~36VDC dual power inputs; E-marking certified; -40°C to 75°C ; w/ galvanic isolation
- **TGS-0008CA-54-24TVI.....P/N: 8351-5873**  
8 10/100/1000T IP54 rated EN50155 unmanaged Ethernet Switch w/M12 connectors; 16.8~56VDC dual power inputs; -40°C to 75°C ; w/ galvanic isolation
- **TGS-0008CA-54-24V-IGN.....P/N: 8351-5872**  
8 10/100/1000T IP54 rated EN50155 unmanaged Ethernet Switch w/M12 connectors; 9~36VDC dual power inputs; E-marking and ITxPT certified; -40°C to 75°C w/ignition ; w/ galvanic isolation
- **TGS-0008CA-41-24V.....P/N: 8351-5874**  
8 10/100/1000T IP41 rated unmanaged Ethernet Switch w/M12 connectors; 9~36VDC dual power inputs; E-marking certified; -40°C to 75°C ; w/ galvanic isolation
- **TGS-0008CA-41-24TVI.....P/N: 8351-58741**  
8 10/100/1000T IP41 rated EN50155 unmanaged Ethernet Switch w/M12 connectors; 16.8~56VDC dual power inputs; -40°C to 75°C ; w/ galvanic isolation
- **TGS-0008CA-41-24V-IGN.....P/N: 8351-5875**  
8 10/100/1000T IP41 rated EN50155 unmanaged Ethernet Switch w/M12 connectors; 9~36VDC dual power inputs; E-marking and ITxPT certified; -40°C to 75°C w/ignition ; w/ galvanic isolation

**OPTIONAL ACCESSORIES**

**M12 Connector & Cable**

Connector

- **ECON120005PF** 5 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-04A(F)-C-180** 4 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-08X(M)-SPEEDCON** 8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON

Cable

- **ECONM12-5P(F)70CM CABLE** 5 pin M12 (Female) A-coded 90 degree cable for power supply, 70cm
- **ECONM12-4P(F)1.5M CABLE** 4 pin M12 (Female) A-coded 90 degree cable for power supply, 150cm
- **ECABM12X83MSTP** 8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm
- **ECONM12-05A(F) to MCP 6P-20CM CABLE** 5 pin M12 (Female) A-coded 180 degree to 6 pin MCP power cable, 20cm (For ignition models)

**Lantech Communications Global Inc.**

www.lantechcom.tw  
info@lantechcom.tw

© 2023 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.