

T(P)GS-0008CB

8 10/100/1000T (PoE at/af) EN50155 Ethernet Switch

- IEEE802.3at/af up to 30W PoE output (for PoE model)
- Dual power inputs 9~36V (24VI model) or 16.8~56V (24TVI model); with galvanic isolation between input power, PoE (for PoE model) and all Ethernet ports
- Wide Operating Temperature from -40 °C to 75 °C
- Efficient PoE timer when ignition off (-IGN model)
- Inrush current prevention; polarity reverse protection
- IP54 Aluminum housing for best heat dissipation and preventing moist ingress
- EN50155/50121-3-2/50121-4 and EN45545-2 Fire & Smoke verification
- E-mark certificate for vehicle (24VI model)
- ITxPT labeled w/ignition function (24VI-IGN model)



OVERVIEW

Lantech T(P)GS-0008CB is an 8 10/100/1000 Base-T with M12-connectors EN50155 unmanaged Ethernet switch with IP54 rated protection which meets the high-reliability requirements demanded by industrial rolling stock applications.

Redundant dual 24VI/24TVI input with max PoE budget; inrush current prevention and polarity reverse protection

The T(P)GS-0008CB 24VI model accepts 9~36VDC dual input and 24TVI model accepts 16.8~56VDC with galvanic isolation to PoE and all Ethernet ports. PoE feeding with 80W budget from internal power. The redundant power input design prevents inrush current and safeguards against polarity reversal.

E-marking certificate, ITxPT; ISO 7637-2 compliant and extended working temperature

The T(P)GS-0008CB is designed to meet with critical network environment with IP54 enclosure and M12 connectors for protection against dust and water. It has passed harsh environmental testing to comply with Industrial EMI and Safety standards as well as stability testing such as Free fall, Shock,

and vibration. It is labeled with ITxPT public transport standards and also compliant with ISO 7637-2 which protects switch from being damaged by high voltage that could be found at vehicle cranky start.

For greater flexibility in application the T(P)GS-0008CB supports an extended operating temperature range from -40°C to 75°C.

Efficient PoE timer when ignition off

Efficient PoE configuration when ignition off supports optional PoE feeding OFF timer (1/5/10mins or default by 60mins) at ignition off mode to prevent car battery drain-out. (- IGN model)

The E-marking certificate makes it the most suitable switch for bus, carriage, other vehicle applications as well as for industrial areas where the power source is limited with 12V or 24V but has demand of IP surveillance or VoIP applications.


※The optional PoE off-timer is available after February 23, 2024.

FEATURES & BENEFITS

- | | |
|--|--|
| ■ 8 10/100/1000T Unmanaged EN50155 Ethernet Switch with M12 connectors and IP54 rated protection | ■ PoE port (for PoE model), total PoE budget 80W |
| ■ Supports IEEE802.3at/af feeding power up to 30W per | ■ Back-plane (Switching Fabric): 16 Gbps |
| | ■ 16K MAC address table |

- Wide Operating Temperature (-40°C ~75°C)
- Wall mount design
- E-mark certificate for vehicle (24VI model)
- EN50155/50121-3-2/50121-4 and EN45545-2 Fire &
- Smoke verification
- Inrush current prevention; polarity reverse protection
- ITxPT labeled w/ ignition function (24VI-IGN model)

DIMENSIONS (unit=mm)

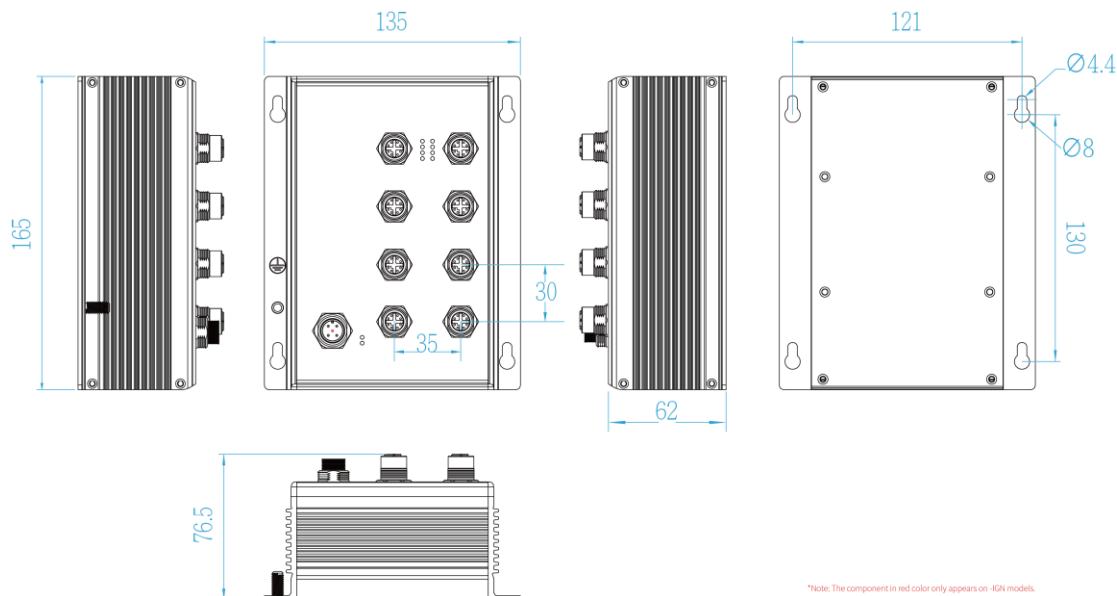

SPECIFICATIONS

Hardware Specification	
IEEE Standard	IEEE802.3 10BASE-T Ethernet IEEE802.3u 100BASE-T Ethernet IEEE802.3ab 1000Base-T IEEE802.3x Flow Control and Back Pressure IEEE802.3at/af Power over Ethernet (For PoE Model)
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port
Mac Address	16K MAC address table
Connector	10/100/1000T: 8 x M12, 8-pole X-coded, Female with auto MDI/MDI-X function Power connector: 1 x M12, 4-pole A coded, Male 1 x M12, 5-pole A-coded, Male (-IGN model)
LED	Per unit: Power 1 (Green), Power 2 (Green), Ethernet: Link/Activity (Green) PoE: (Green)
PoE pin assignment	M12 port # 1~ # 8 support IEEE 802.3at/af End-point. Per port provides up to 30W
10/100/1000T	<ul style="list-style-type: none"> 1:TXD1+ 5:BD4+ 2:TXD1- 6:BD4- 3:RXD2+ 7:BD3- 4:RXD2- 8:BD3+
Power Supply	Dual input 9~36VDC (24VI model) 16.8~56VDC (24TVI model)
Power Consumption	4.5W without PoE
Power Budget	Total 80W @ 24VDC and above
Operating Humidity	5% to 95% (Non-condensing)
Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Case Dimension	Aluminum case, IP54 rated 135mm(W)x165mm(H)x76.5mm(D)
Weight	700g
Installation	Wall Mount Design
EMC	FCC Part 15, Subpart B ICES-003 Issue 7, EN 55035:2017/A11:2020, EN 55032:2015/A11:2020, IEC 61000-4-2:2008, IEC 61000-4-3:2020, IEC 61000-4-4:2012, IEC 61000-4-5:2014+AMD1:2017 CSV,

	IEC 61000-4-6:2023, IEC 61000-4-8:2009, IEC 61000-6-2:2016, IEC 61000-6-4:2018, EN IEC 61000-6-2:2019, EN IEC 61000-6-4:2019, BS EN 55035:2017+A11:2020, BS EN 55032:2015+A11:2020	Report	EN 50121-4:2016/A1:2019, EN 50121-3-2:2016/A1:2019, EN 50124-1:2017, EN 45545-1, EN 45545-2 Fire & Smoke verification
Stability Testing	EN 61373:2010 (Shock and Vibration)	Vehicle certificate	E24 marking (24VI model) ITxPT labeled (24VI-IGN model)
Verifications &	EN 50155:2021,	MTBF	TBC
		Warranty	5 years

*Future release

**Optional

ORDERING INFORMATION

All model packages include M12 caps and wall mount brackets. All standard models are non-coating, optional coating models are available with –C model name. Model name -IGN as default 60min., ignition models with PoE OFF timer 1min/5min/10min have different part numbers and descriptions. (IGN1/IGN5/IGN10 mins.)

- **TPGS-0008CB-54-24VI.....P/N: 8351-1463**
8 10/100/1000T IP54 rated PoE at/af Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; E-marking certified ; w/PoE & ethernet galvanic isolation
- **TPGS-0008CB-54-24TVI.....P/N: 8351-1464**
8 10/100/1000T IP54 rated EN50155 PoE at/af Ethernet Switch w/M12 connectors; -40°C to 75°C; 16.8~56VDC dual input ; w/ PoE & ethernet galvanic isolation
- **TPGS-0008CB-54-24VI-IGN.....P/N: 8351-1465**
8 10/100/1000T IP54 rated EN50155 PoE at/af Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; E-marking and ITxPT certified w/ignition; w/ PoE & ethernet galvanic isolation
- **TGS-0008CB-54-24VI.....P/N: 8351-1469**
8 10/100/1000T IP54 rated Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; E-marking certified ; w/ ethernet galvanic isolation
- **TGS-0008CB-54-24TVI.....P/N: 8351-147**
8 10/100/1000T IP54 rated EN50155 Ethernet Switch w/M12 connectors; -40°C to 75°C; 16.8~56VDC dual input ; w/ ethernet galvanic isolation
- **TGS-0008CB-54-24VI-IGN.....P/N: 8351-1471**
8 10/100/1000T IP54 rated EN50155 Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; E-marking and ITxPT certified w/ignition; w/ ethernet galvanic isolation

OPTIONAL ACCESSORIES

M12 Connector & Cable

Connector

- **ECON120005PF** 5 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-04A(F)-C-180** 4 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-04D(M)-C-180** 4 pin M12 (Male) D-coded 180 degree crimp type connector for data

Cable

- **ECONM12-5P(F)70CM CABLE** 5 pin M12 (Female) A-coded 90 degree cable for power supply, 70cm
- **ECONM12-4P(F)1.5M CABLE** 4 pin M12 (Female) A-coded 90 degree cable for power supply, 150cm
- **ECAB124030MJS** 4 pin M12 (Male) D-coded 180 degree RJ45 STP cable for data, 300cm
- **ECONM12-05A(F) to MCP 6P-20CM CABLE** 5 pin M12 (Female) A-coded 180 degree to 6 pin MCP power cable, 20cm (For ignition models)

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2024 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 18 November 2024
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.