

# T(P)GS-5010T

10 10/100/1000T X-coded (w/8 PoE at/af) EN50155 Managed Ethernet Switch w/ Enhanced G.8032 Ring; 24V/ 24TV/ WVI input

- EN50155/61373/45545-2 verification; 16.8~137.5VDC (WVI) or 9~36VDC (24V) or 16.8~56VDC (24TV) input selection
- Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 ETBN
- PoE model: IEEE802.3at/af up to 30W per port; PoE management incl. detection and scheduling
- PoE model: PoE galvanic isolation between input, PoE and output as well as case; Ethernet galvanic isolation for all models
- IP54/IP67 Aluminum housing for best heat dissipation and preventing moist ingress
- Enhanced G.8032 ring protection < 20ms for single ring. Supports auto mode, enhanced mode, train mode. Multi-VLAN and basic mode; Enhanced G.8032 ring covers multicast packets
- MSTP 16MSTI/RSTP; support MRP ring
- Miss-wiring avoidance & node failure protection
- Inrush current protection
- Optional bypass in case of power failure
- User friendly UI, including auto topology drawing; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, MLD snooping, DHCP server & DHCP Option82; DHCP Snooping, Port based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH v2/SSL, HTTPS, INGRESS/EGRESS ACL L2/L3, QinQ, TACACS+\*\*
- N-key configurator\*\* for upgrading, auto back up /editable restoration without computer



## OVERVIEW

Lantech T(P)GS-5010T is a high performance L2+ All Gigabit Ethernet switch with 10 10/100/1000T (w/8 PoE at/af ports at M12 X-coded) providing L2 wire speed and advanced security function for network aggregation deployment. It houses in an IP54/IP67 aluminum compact enclosure that is waterproof and will prevent moisture ingress due to temperature fluctuations. It delivers ITU G.8032 enhanced ring recovery less than 20ms including train coupling ring, enhanced mode etc for easy configuration, comprehensive QoS, QoS by VLAN, advanced security including INGRESS/EGRESS ACL L2/L3, TACACS+\*\*, SSH v2/SSL, Mac based DHCP server, DHCP Option 82 relay, QinQ, DHCP server and DHCP Option 82 server, IGMPv1/v2/v3/router port, which are important features required in train and large network. It also supports Cisco Discovery Protocol (CDP) for Ciscoworks to detect the switch info and show on L2 map topology.

### **Selection of dual WVI (16.8V~137.5VDC) input or 24V (9V~36VDC) or 24TV (16.8V~56VDC); Inrush current protection**

WVI model w/ Ethernet and PoE galvanic isolation accepts 16.8~137.5VDC dual input and can feed 54V output with max 80W PoE budget. 24V model w/ Ethernet and PoE galvanic isolation accept 9~36VDC dual input for PoE feeding with max

80W budget. 24TV model w/ Ethernet and PoE galvanic isolation accept 9~36VDC dual input for PoE feeding with max 80W budget. (PoE model) The inrush current on initial power up can be limited lower than 10 x nominal current.

### **PoE +, Advanced PoE management (PoE model)**

Lantech TPGS-5010T supports IEEE802.3at/af standard which can feed power up to 30W at each PoE port for big power consumption devices like PTZ IP camera, wireless AP etc. The advanced PoE management includes PoE detection and scheduling besides the regular PoE per port status. PoE detection can detect if the connected PD is hang up then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Per port PoE status can remotely On/Off the power and display information of voltage, current, watt and PoE temperature.

### **Enhanced G.8032 ring, 16 MSTI MSTP; MRP ring**

Lantech T(P)GS-5010T features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering multicast packets. It also supports various ring topologies that covers multi-chain (under enhanced ring), train ring, basic ring, multiple-VLAN ring and auto-ring by easy setup than others. The innovative auto-Ring configurator (auto mode) can calculate owner and neighbor in one step. It

supports MSTP that allows each spanning tree for each VLAN for redundant links with 16 MSTI.

MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

#### **QoS by VLAN for legacy device**

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

#### **QinQ, QoS and GVRP supported**

It supports the QinQ, QoS and GVRP for large VLAN segmentation.

#### **IGMPv3, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection**

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port, MLD Snooping, and static multicast forwarding binding by ports for video surveillance application.

#### **802.1X security by MAC address**

MAC-based port authentication is an alternative approach to 802.1x for authenticating hosts connected to a port. By authenticating based on the host's source MAC address, the host is not required to run a user for the 802.1x protocol. The RADIUS server that performs the authentication will inform the switch if this MAC can be registered in the MAC address table of switch.

#### **Miss-wiring avoidance, node failure protection, Loop protection**

The T(P)GS-5010T also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech T(P)GS-5010T (IP54/IP67) is able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

#### **DHCP option 82 & Port based, Mac based DHCP, Option66, DHCP Snooping, IPv6 DHCP server**

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Snooping is supported. For the ending device which need to download file from TFTP server, DHCP Option66 server can offer IP address of TFTP server to DHCP client. Basic IPv6 DHCP service can be supported.

#### **Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN**

Lantech OS1 Ethernet switches comply with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (TBN).

#### **Editable configuration file; Optional N-key auto backup, exported text file**

The configuration file of Lantech T(P)GS-5010T (IP54/IP67) can be exported and edited with word processor for the other switches configuration with ease.

The optional N-key configurator offers firmware upgrade, auto backup/ editable configuration restore without computer by adjusting the DIP switch.

The built-in watchdog design can automatically reboot the switch when CPU is found dead.

#### **Auto-provisioning for firmware/configuration update**

The switch supports auto-provisioning for switch to auto-check the latest software image and configuration through TFTP server.

#### **User friendly UI, Auto topology drawing, complete CLI**

The user-friendly UI, innovative auto topology drawing and topology demo makes T(P)GS-5010T much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line.

#### **Event log & message; 2 DI + 2 DO**

In case of event alarm, the T(P)GS-5010T will immediately send an email\*\* to pre-defined addresses as well as SNMP Traps out. It provides 2DI and 2DO while disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

#### **Environmental monitoring for inside switch info**

The built-in environmental monitoring can detect switch overall temperature, input voltage, current and total PoE load (PoE model) where can send the SNMP traps and email\*\* when abnormal.

#### **Optional bypass relay prevents from power lost**

The optional bypass relay is set to bypass the switch to the next one when power is off in order to protect the network from crashing. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. Smart bypass can be activated when switch encounters power failure (one pair). (-BT model)

#### **EN50155, 45545-2, 50121-3-2, 61373 certified; High ESD protection**


Lantech T(P)GS-5010T features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.

The T(P)GS-5010T is designed to meet with critical network environment with IP54/IP67 aluminum enclosure and M12 connectors for water proof. With EN45545-2 Fire & Smoke, and EN50155 & 61373 verification, the T(P)GS-5010T is best for railway in train/track side, vehicle and mining applications. For more usage flexibilities, T(P)GS-5010T supports wide operating temperature from -40°C to 75°C.

## FEATURES & BENEFITS

- 10 10/100/1000T X-coded EN50155 (PoE) Managed IP54/IP67 M12 Ethernet Switch (w/8x 802.3at/af PoE ports) (Total 10 Ports Gigabit Switch)
- EN45545-2 Fire & Smoke, EN50155 and EN61373 shock/vibration certified
- PoE 24VI model w/PoE galvanic isolation accepts dual 9~36VDC power input and boost to 54V for PoE 802.3at/af at max 80W budget
- PoE 24TVI model w/PoE galvanic isolation accepts dual 16.8~56VDC power input and boost to 54V for PoE 802.3at/af at max 80W budget
- PoE WVI model w/PoE galvanic isolation accepts dual 16.8~137.5VDC power inputs and feed 54V for PoE at/af at to provide max 80W budget
- Galvanic isolation from power input/Ethernet ports to system 1.5KV
- PoE model: PoE management including PoE detection and scheduling for PD (power devices)
- Back-plane (Switching Fabric): 20Gbps
- 16K MAC address table
- 10KB Jumbo frame supported
- User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting
- Enhanced G.8032 Ring protection in 20ms for single ring
  - Support various ring/chain topologies, including train ring, enhanced ring, basic ring, auto ring & multiple VLAN ring
  - Enhanced G.8032 ring configuration with ease
  - Auto ring configuration (auto mode) for single ring
  - Cover multicast and data packets protection
- Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority
- IEEE 802.1d STP, IEEE 802.1w RSTP, 802.1s MSTP VLAN redundancy 16 MSTI
- 4K 802.1Q VLAN, Port based VLAN, GVRP, QinQ, QoS
- MLD Snooping for IPv6 Multicast stream
- Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console
- DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server; Port based DHCP server; DHCP Snooping; DHCP Option 66; basic IPv6 DHCP server
- Mac based DHCP server to assign IP address
- Bandwidth Control
  - Ingress packet filter and egress rate limit
  - Broadcast/multicast packet filter control
- Miss-wiring avoidance
  - LED indicator
- Node failure protection
  - Ensure the switches in a ring to survive after power breakout is back
  - The status can be shown in NMS when each switch is back
- Inrush current protection
- System Event Log and SNMP Trap for alarm support; 32 RMON counters
- Security
  - SSL/SSH v2/INGRESS/EGRESS ACL L2/L3
  - MAC address table: MAC address entries/Filter/MAC-Port binding
  - IP Security: IP address security management to prevent unauthorized intruder.
  - TACACS+\*\*
  - Management access control with priority
  - Login Security: IEEE802.1X/RADIUS
  - HTTPS for secure access to the web interface
- Static multicast forwarding forward reversed IGMP flow (MVR) with multicast packets binding with ports for IP surveillance application
- IGMP router port to assign query in ring for reversed multicast video flow
- IGMPv1,v2,v3 with Query mode for multimedia GMRP
- Watchdog design to auto reboot switch when CPU is found dead
- Built-in environmental monitoring for input voltage, current, ambient temperature and total PoE load (PoE model)
- Supports 2 DI + 2 DO (Digital Input/Digital Output)
- Configuration backup and restoration
  - Supports editable configuration file for system quick installation
  - N-key\*\* for mass configuration auto-backup, editable restoration and auto firmware upgrade
- TFTP/HTTP firmware upgrade
- Diagnostic including Ping / DDM information
- Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN
- IP54/IP67 aluminum housing for wall mount design
- Bypass protection\*\* on port 9/10 - Bypass failed switch caused by power failure of switch to protect network intactness (-BT model)
- Auto Provision to verify switch firmware with the latest or certain version


**DIMENSIONS (unit=mm)**

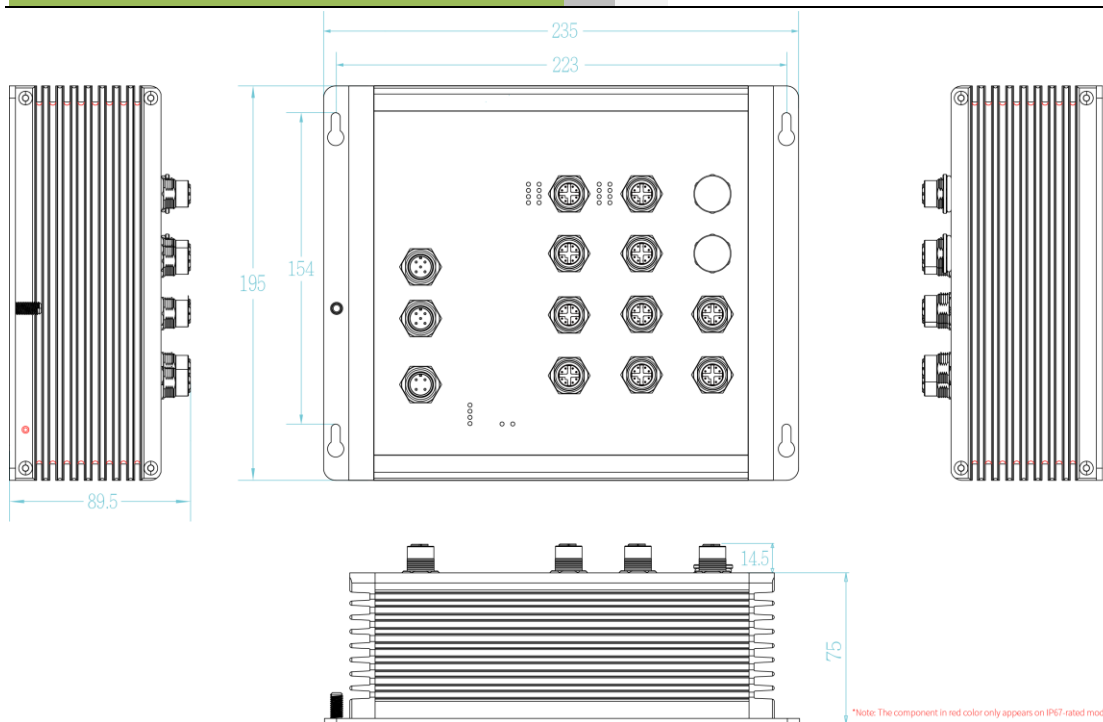

**SPECIFICATIONS**

**Hardware Specification**

Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.1AB Link Layer Discovery Protocol (LLDP) IEEE 802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet	1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)
Switch Architecture	Back-plane (Switching Fabric): 20Gbps	Bypass Protection** Built-in bypass module on uplink ports (port#9,10) to pass to next switch in case of power failure (one pair)
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet	LED Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red), RM (Green) Ethernet port: Link/Active (Green) PoE: Link / Active (Green, PoE model)
Mac Address	16K MAC address table	DI/DO 2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output (DO): Open collector to 80 VDC, 50mA
Jumbo frame	10KB	
Connectors	10/100/1000T: 10 x ports M12 8-pole X-coded with Auto MDI/MDI-X function (port 9,10 with optional bypass) RS-232/Reset connector: 1 x M12 5-pole A-coded DI/DO: 1 x M12 5-pole A-coded Power Input connector: 1x M12 4-pole A-coded Male	Operating Humidity 5% ~ 95% (Non-condensing)
Network Cable	10Base-T: 2-pair STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)	Operating Temperature -40°C~75°C / -40°F~167°F
		Storage Temperature -40°C~85°C / -40°F~185°F
		Power Supply 16.8~137.5VDC on WVI model w/ galvanic isolation 9~36VDC on 24VI model w/ galvanic isolation 16.8~56VDC on 24TVI model w/ galvanic isolation (PoE galvanic isolation for PoE models; Ethernet galvanic isolation for all models)
		Power Consumption Max. 17W exclude PoE load
		PoE Budget Total 80W @ 24 VDC and above

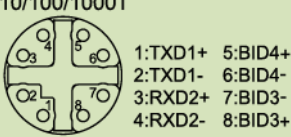(PoE model)	Higher PoE budget can be applied upon request. **
PoE pin assignment (PoE model)	M12 port # 1~ # 8 support IEEE 802.3at/af End-point Per port provides up to 30W  
Dimensions	Aluminum case (IP54/IP67) 235mm(W)x195mm(H)x89.5mm(D)
Weight	1.3kgs (IP54/IP67)
Installation	Wall Mount Design
EMI & EMS	FCC Part 15 Class A, CE EN55022, CE EN55024 , CE EN61000-4-11 CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE EN61000-4-8 (Magnetic field) Level 3
Stability Testing	EN61373 (Shock and Vibration)
Certifications & report	EN50155/EN50121-3-2/EN50121-4 Certificate EN45545-2 R13/R22/R23/R24/R25 (EN ISO 4589-2, EN ISO 5659-2, NF X70-100-1 & 2) Fire & Smoke verification
Vehicle Certificate	E24 marking (UN ECE R10) (24VI model)*
MTBF	736,421hrs. (standards: IEC 62380)
Warranty	5 years
<b>Software Specification</b>	
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI
SNMP MIB	MIB MIBII SNMP MIB Bridge MIB IF MIB RMON MIB Private MIB
ITU G.8032	Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode) Support various ring/chain topologies Includes train ring, auto ring, basic single ring, enhanced ring, multiple-VLAN ring Enhanced G.8032 ring configuration with ease Cover multicast & data packets protection
PoE Management (PoE model)	<ul style="list-style-type: none"> <li>■ PoE Detection to check if PD is hang up then restart the PD</li> <li>■ PoE Scheduling to On/OFF PD upon routine time table</li> <li>■ On/ Off, voltage, current, watts, temperature</li> </ul>
User friendly UI	<ul style="list-style-type: none"> <li>■ Auto topology drawing</li> <li>■ Topology demo</li> <li>■ Auto configuration for G.8032 (auto mode) for single ring</li> <li>■ Complete CLI for professional setting</li> </ul>
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN
CDP	Cisco Discovery Protocol for topology mapping
Environmental Monitoring	System status for input voltage, current, PoE load and ambient temperature to be shown in GUI and sent alerting if any abnormal status
VLAN	Port Based VLAN

	IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096) GVRP, QinQ Protocol based VLAN; IPv4 Subnet based VLAN
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 16 MSTI
Quality of Service	The quality of service determined by port / CoS / ToS / VLAN / 61375-3-4
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues
Login Security	Supports IEEE802.1X Authentication/RADIUS
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/MAC-Port binding Ingress/Egress ACL L2/L3 SSL/ SSH v2 for Management HTTPS for secure access to the web interface TACACS** for Authentication
IGMP	Support IGMP snooping v1,v2,v3; 1024 multicast groups; IGMP router port ; IGMP query; GMRP
MLD Snooping	Support IPv6 Multicast stream
MVR	Static multicast forwarding forward reversed IGMP flow (MVR) with multicast packets binding with ports for IP surveillance application
Bandwidth Control	Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.
Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
System Log	Supports System log record and remote system log server
Protection	<ul style="list-style-type: none"> <li>■ Miss-wiring avoidance</li> <li>■ Node failure protection</li> <li>■ Loop protection</li> </ul>
SNMP Trap	Up to 10 trap stations; trap types including: <ul style="list-style-type: none"> <li>● Device cold start</li> <li>● Authorization failure</li> <li>● Port link up/link down</li> <li>● DI/DO open/close</li> <li>● Typology change (ITU ring)</li> <li>● Power failure</li> <li>● Environmental abnormal</li> </ul>
DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based DHCP; DHCP Snooping; DHCP Option 66; Basic IPv6 DHCP server
Mac based DHCP Server	Assign IP address by Mac
DNS	Provide DNS client feature
Diagnostic	Support Ping and DDM information
ECN	Complies with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (TBN).
SNTP	Supports SNTP to synchronize system clock in Internet
Firmware Update	Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade
N-Key Configurator**	RJ45 dongle for firmware upgrade, auto / editable configuration backup/restoration
Configuration upload and download	Supports editable configuration file for system quick installation
Auto Provision	To verify switch firmware with the latest or certain

version

\*Future release

\*\*Optional

## ORDERING INFORMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model name; Optional bypass models are available with -BT model names.

- **TPGS-5010T-8-54-WVI.....P/N: 8361-416**  
10 10/100/1000T X-coded w/8 PoE EN50155 M12 IP54 L2+ Managed Gigabit Ethernet Switch; 16.8~137.5VDC dual input w/ PoE galvanic isolation; PoE max 80W budget ; -40°C to 75°C
- **TPGS-5010T-8-54-24VI.....P/N: 8361-417**  
10 10/100/1000T X-coded w/8 PoE M12 IP54 L2+ Managed Gigabit Ethernet Switch; 9~36VDC dual input w/ PoE galvanic isolation; PoE max 80W budget ; -40°C to 75°C ; E-marking certified\*
- **TPGS-5010T-8-54-24TVI.....P/N: 8361-4174**  
10 10/100/1000T X-coded w/8 PoE EN50155 M12 IP54 L2+ Managed Gigabit Ethernet Switch; 16.8~56VDC dual input w/ PoE galvanic isolation; PoE max 80W budget ; -40°C to 75°C
- **TGS-5010T-54-WVI.....P/N: 8361-4162**  
10 10/100/1000T X-coded EN50155 M12 IP54 L2+ Managed Gigabit Ethernet Switch; 16.8~137.5VDC dual input w/ galvanic isolation; -40°C to 75°C
- **TGS-5010T-54-24VI.....P/N: 8361-4172**  
10 10/100/1000T X-coded M12 IP54 L2+ Managed Gigabit Ethernet Switch; 9~36VDC dual input w/ galvanic isolation; -40°C to 75°C ; E-marking certified\*
- **TGS-5010T-54-24TVI.....P/N: 8361-4175**  
10 10/100/1000T X-coded EN50155 M12 IP54 L2+ Managed Gigabit Ethernet Switch; 16.8~56VDC dual input w/ galvanic isolation; -40°C to 75°C
- **TPGS-5010T-8-67-WVI.....P/N: 8361-4161**  
10 10/100/1000T X-coded w/8 PoE EN50155 M12 IP67 L2+ Managed Gigabit Ethernet Switch; 16.8~137.5VDC dual input w/ PoE galvanic isolation; PoE max 80W budget ; -40°C to 75°C
- **TPGS-5010T-8-67-24VI.....P/N: 8361-4171**  
10 10/100/1000T X-coded w/8 PoE M12 IP67 L2+ Managed Gigabit Ethernet Switch; 9~36VDC dual input w/ PoE galvanic isolation; PoE max 80W budget ; -40°C to 75°C ; E-marking certified\*
- **TPGS-5010T-8-67-24TVI.....P/N: 8361-4176**  
10 10/100/1000T X-coded w/8 PoE EN50155 M12 IP67 L2+ Managed Gigabit Ethernet Switch; 16.8~56VDC dual input w/ PoE galvanic isolation; PoE max 80W budget ; -40°C to 75°C
- **TGS-5010T-67-WVI.....P/N: 8361-4163**  
10 10/100/1000T X-coded EN50155 M12 IP67 L2+ Managed Gigabit Ethernet Switch; 16.8~137.5VDC dual input w/ galvanic isolation; -40°C to 75°C
- **TGS-5010T-67-24VI.....P/N: 8361-4173**  
10 10/100/1000T X-coded M12 IP67 L2+ Managed Gigabit Ethernet Switch; 9~36VDC dual input w/ galvanic isolation; -40°C to 75°C ; E-marking certified\*
- **TGS-5010T-67-24TVI.....P/N: 8361-4177**  
10 10/100/1000T X-coded EN50155 M12 IP67 L2+ Managed Gigabit Ethernet Switch; 16.8~56VDC dual input w/ galvanic isolation; -40°C to 75°C
- **N-key Configurator.....P/N: 8850-100**  
RJ45 connector dongle for firmware upgrade, auto/editable configuration backup and restoration; -20°C to 60°

## OPTIONAL ACCESSORIES

### M12 Connector & Cable

#### Connector

- **ECONM12-08X(M)-SPEEDCON** 8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON
- **ECONM12-05A(M)-C-180** 5 pin M12 (Male) A-coded 180 degree crimp type connector for DI/DO
- **ECONM12-04A(F)-C-180** 4 pin M12 (Female) A-coded 180 degree crimp type connector for power supply

#### Cable

- **ECONM12-4P(F)1.5M CABLE** 4 pin M12 (Female) A-coded 90 degree cable for power supply, 150cm
- **ECABM12X83MSTP** 8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm

### Lantech Communications Global Inc.

www.lantechcom.tw  
info@lantechcom.tw

© 2024 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.