

MC-116-RPS

16 slots Universal Media Converter Chassis

- Support 10/100Base-TX to 100Base-FX Module
- Hot Swappable Power Supply System
- Redundant Power Design for Chassis



OVERVIEW


Lantech MC-116-RPS is a universal chassis which allows mixed installation of managed and unmanaged converters; it provides one installed power and an extra power slot for redundancy as well as three hot-swappable fans.

All the converters and redundant power supply supports plug-and-play and hot-swappable features which allow user to plug or pull out the converters/ redundant power supply without rebooting the chassis. The MC-116-RPS can also be mounted in a standard 19-inch rack.

FEATURES & BENEFITS

- | | |
|--|---|
| <ul style="list-style-type: none"> ■ Chassis with 16 Slots for media converter ■ Hot swappable power supply system ■ Support 10/100Base-TX to 100Base-FX Module | <p>(CM-011A)</p> <ul style="list-style-type: none"> ■ Redundant power design for chassis ■ Rack-mount installation |
|--|---|

DIMENSIONS (unit=mm)

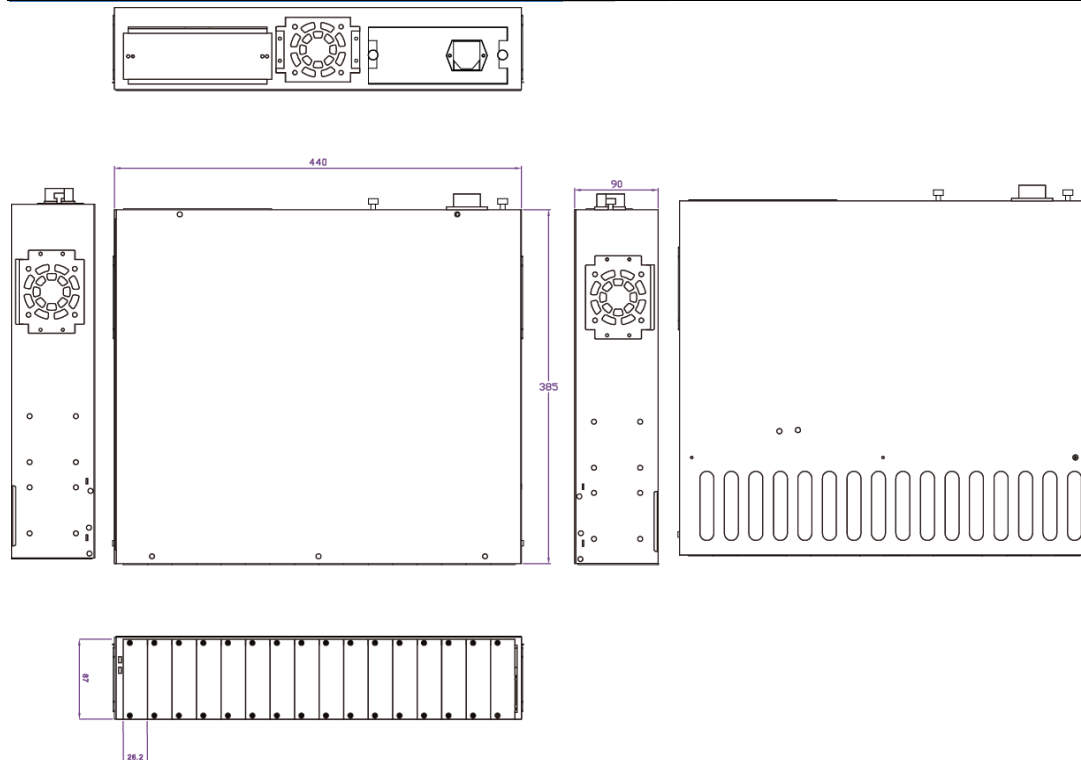

SPECIFICATION

Hardware Specification		Dimension	440 x 385 x 90mm (W x D x H)
Interface	Number of module slot : 16	Operation Temperature	0°C to 50°C
	Number of power slot : 2	Storage Temperature	-20° ~ 60°C
	Number of fan : 3	Operational Humidity	5% to 90% (Non-condensing)
LED	Power A, Power B	Weight	7.65KG (The Chassis Only) 10.4KG (The Chassis With 2 Power Modules)
Power	Chassis Cabinet:	EMI & safety	FCC Class A, CE
	AC Power	Warranty	2 years
	Input voltage range: AC 85~264 VAC, 50/60 HZ Output voltage:5V DC		
Power Consumption	DC Power		
	Input voltage: 48VDC Output voltage: 5VDC		
	9.5W (empty loading)		

ORDERING INFORMATION

- **MC-116-RPS -P1AC (EU).....P/N: 8420-010**
16 Slots Universal Media Converter Rack19-inch (2U), with 1 AC power, EU plug
- **MC-116-RPS -P1AC (US).....P/N: 8420-0101**
16 Slots Universal Media Converter Rack19-inch (2U), with 1 AC power, US plug
- **MC-116-RPS -P1AC (UK).....P/N: 8420-0102**
16 Slots Universal Media Converter Rack19-inch (2U), with 1 AC power, UK plug
- **MC-116-RPS -P1AC (AU).....P/N: 8420-0103**
16 Slots Universal Media Converter Rack19-inch (2U), with 1 AC power, AU plug
- **MC-116-RPS -P1DC.....P/N: 8420-009**
16 Slots Universal Media Converter Rack19-inch (2U), with 1 DC power
- **MC-116-RPS -AC POWER (EU).....P/N: EOTH000672**
Slide-in AC Power Module for MC-116-RPS
- **MC-116-RPS -AC POWER (US).....P/N: EOTH0006721**
Slide-in AC Power Module for MC-116-RPS
- **MC-116-RPS -AC POWER (UK).....P/N: EOTH0006722**
Slide-in AC Power Module for MC-116-RPS
- **MC-116-RPS -AC POWER (AU).....P/N: EOTH0006723**
Slide-in AC Power Module for MC-116-RPS
- **MC-116-RPS -DC-POWER.....P/N: EOTH000671**
Slide-in DC Power Module for MC-116-RPS
- **CM-011A-ST.....P/N: 8421-160**
100FX (100FX, ST, Multit-Mode, 2km) to 10/100TX Converter w/ LLF function
- **CM-011A-SC.....P/N: 8421-161**
100FX (100FX, SC, Multit-Mode, 2km) to 10/100TX Converter w/ LLF function
- **CM-011A-SC(SC/30km).....P/N: 8421-176**
100FX (100FX, SC, Single-Mode, 30km) to 10/100TX Converter w/ LLF function
- **MBCH16001**
Brackets for the chassis of MC-116-RPS series

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw© 2023 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.