

T(P)GR-3208T

10 GE (PoE) M12 NAT Router Switch



OVERVIEW

Lantech T(P)GR-3208T is a high-performance router switch designed for rail/metro and vehicle 24V input systems with 10 10/100/1000T w/8 PoE 802.3af/at Ethernet ports (PoE model). It provides L2 management, NAT and advanced security functions for onboard network deployment. WebGUI, and complete CLI settings make configuration easy. The OPEN API document format for Restful API can greatly improve central management efficiency for various applications including fleet management and AIOT. The advanced cybersecurity mechanism can prevent hackers from hacking or attacking. EN50155, ITxPT* and Emarking certificates ensure the design to be met with world-class criteria.

Redundant dual power input design (24VI;24TVI model); EN50155 verification with high ESD and inrush current prevention and polarity reverse protection; E-marking & ITxPT* certificate; ISO 16750-2 compliant

T(P)GR-3208T is designed with dual power inputs that accept 9V~36V DC for vehicle use, and 16.8V-56VDC for 24TVI train model and is capable of withstanding EMI/RFI interference in the onboard network as well as environmental shocks and vibrations. The redundant power input design integrates inrush current protection also protect against polarity reversal. Additionally, the galvanic isolation feature shields the system from power transients often present in onboard networks. The switch complies with ITxPT* public transport standards and E-marking. It also meets the requirements of ISO 16750-2 P5A, reducing the impact of high-frequency pulse voltage that could be incurred by motor applications.

Ignition PoE timer function on IGN model, ITxPT Xstatus protocol

The IGN model features a programmed timer for each port that allows users to shut down individual PoE ports with customizable intervals ranging from 30 seconds to 60 minutes. This design eliminates the need for additional relay wiring, facilitating remote configuration to adjust the PoE timer at any time and from anywhere. The switch supports the ITxPT Xstatus protocol, which enables detailed monitoring of Ethernet switches.

PoE budget up to 80W for 8 Ports with PD detection, auto PD reboot, scheduling and Ethernet power input galvanic isolation with partial ports for POE galvanic isolation

T(P)GR-3208T supports maximum PoE budget of 80W with advanced PoE management features, including PoE auto-detection and scheduling. The PoE detection function can identify if a connected Powered Device (PD) becomes unresponsive and then auto-restart the PD. Moreover, PoE scheduling allows for a pre-set power feeding schedule based on a routine timetable. Each PoE port can be enabled or disabled, and it provides information on voltage, current, power (W), and temperature.

There is galvanic isolation between the power input and the Ethernet power system. The PoE galvanic isolation on POE at/af ports provides insulation between the power input and the PoE Ethernet ports, preventing cabling and grounding incidents from damaging the Ethernet switch.

DDoS security to protect switch and server; Optional IEC 62443 compliance with physical tamper resistance and detection for integrity and authenticity of the boot process

The switch is designed with a high standard of security methods to prevent network threats, such as prevention of DDoS attacks, 802.1X security authentication, Dynamic ARP Inspection, IP Source Guard and Port Security. The optional cybersecurity features compliant with IEC 62443-4-2 include vulnerability checking, encrypted files, public key management, strong password enforcement, account management, and penetration and stress testing, among many others, totaling up to 90 security measures. The compliance of IEC 62443-4-2 employs roots of trust to verify the integrity and authenticity of the firmware, software, and configuration data needed for the switch's boot process.

Lantech OS2 PRO Platform with advanced L2 management and L3 routing protocols incl. OSPF and RIP V1&V2

The switch developed on Lantech OS2 Pro platform is equipped with Layer 2 management and some Layer 3 routing protocols, including OSPF and RIP V1,V2. Engineered for diverse vehicle applications, this platform also supports a range of features such as NAT, Port forwarding, multiple Static IP address, DHCP server/option/client/port based, VLAN, IGMP, RSTP/ G.8032 enhanced ring recovery, LACP etc.

Support Open API document for Restful API for better switch performance

The switch supports an OPEN API that uses JSON format to access and manipulate data using GET, PUT, POST, and DELETE methods, thereby avoiding the CPU utilization associated with traditional SNMP management.

mDNS (Multicast DNS) and DNS server/client feature and MQTT-role of Publisher or Broker

It supports mDNS (Multicast DNS) which enables hosts in the LAN to discover and communicate with devices each other in compliance with the DNS protocol, without requiring a traditional DNS server. The switch can act as MQTT Publisher or Broker that can send data to the broker then broker distributors the "payload" to the subscribers all in a very lightweight protocol.

Reliable eMMC for better power efficiency and reliability

The switch utilizes eMMC for firmware storage. The eMMC's standard interface streamlines the design process while delivering improved power efficiency and enhanced reliability, thereby extending the storage's lifespan.

User-friendly GUI, Auto topology drawing, Editable configuration text file, Enhanced Environmental Monitoring, CPU watchdog, Snapshot switch information for trouble-shooting analysis

The user-friendly UI, innovative auto topology drawing, and topology demo make the Lantech switch much easier to use. The complete CLI enables professional engineers to configure settings via the command line. The configuration file can be exported as a text file, allowing it to be easily edited and reconfigured for mass deployment. It supports enhanced environmental monitoring of actual input voltage, current, ambient temperature, and total power load where user can set threshold to trigger an alert or event log. The built-in watchdog design can automatically reboot


the switch if the CPU becomes unresponsive. With the distinctive Snapshot feature, the switch can gather data, including port statistics, system core information, configuration, and event logs, either at a specific point in time or by scheduling, to address switch issues and analyze the root cause promptly.

Optional bypass relay prevents power loss


The optional bypass relay is set to bypass the switch to the next one when power is off in order to protect the network from crashing. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network loss. Smart bypass can be activated when switch encounters power failure. (-BT model) (only for 24TVI models)

DIMENSIONS (unit=mm)

PoE models

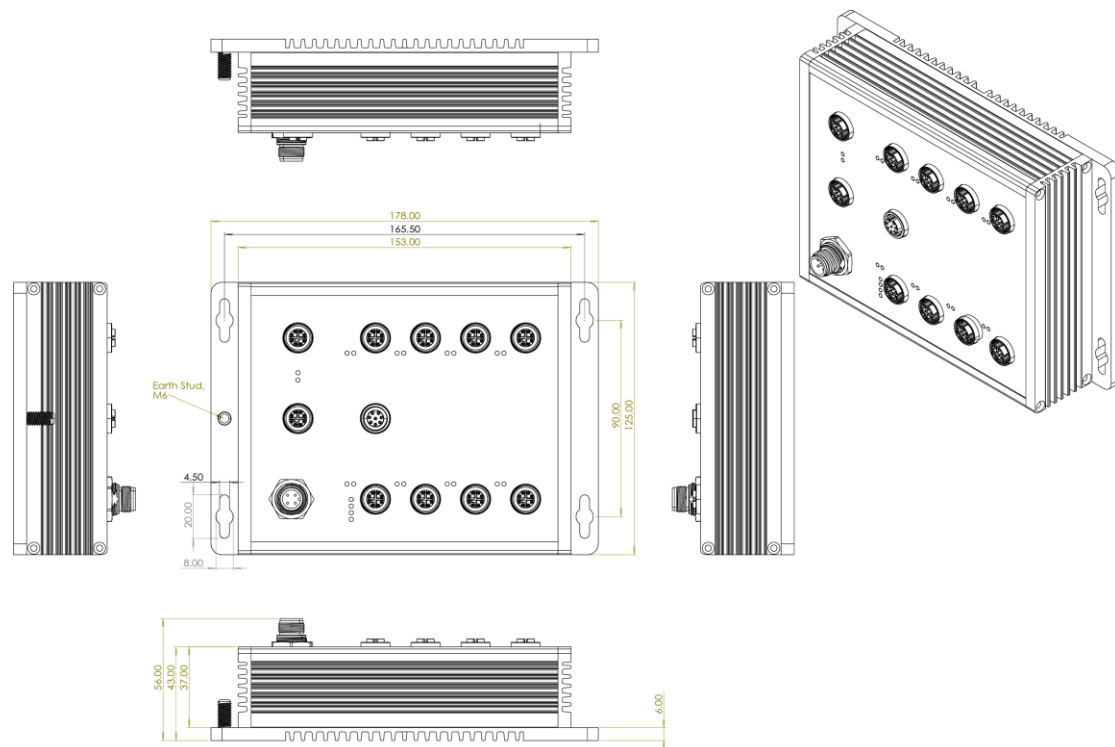

Non-PoE models

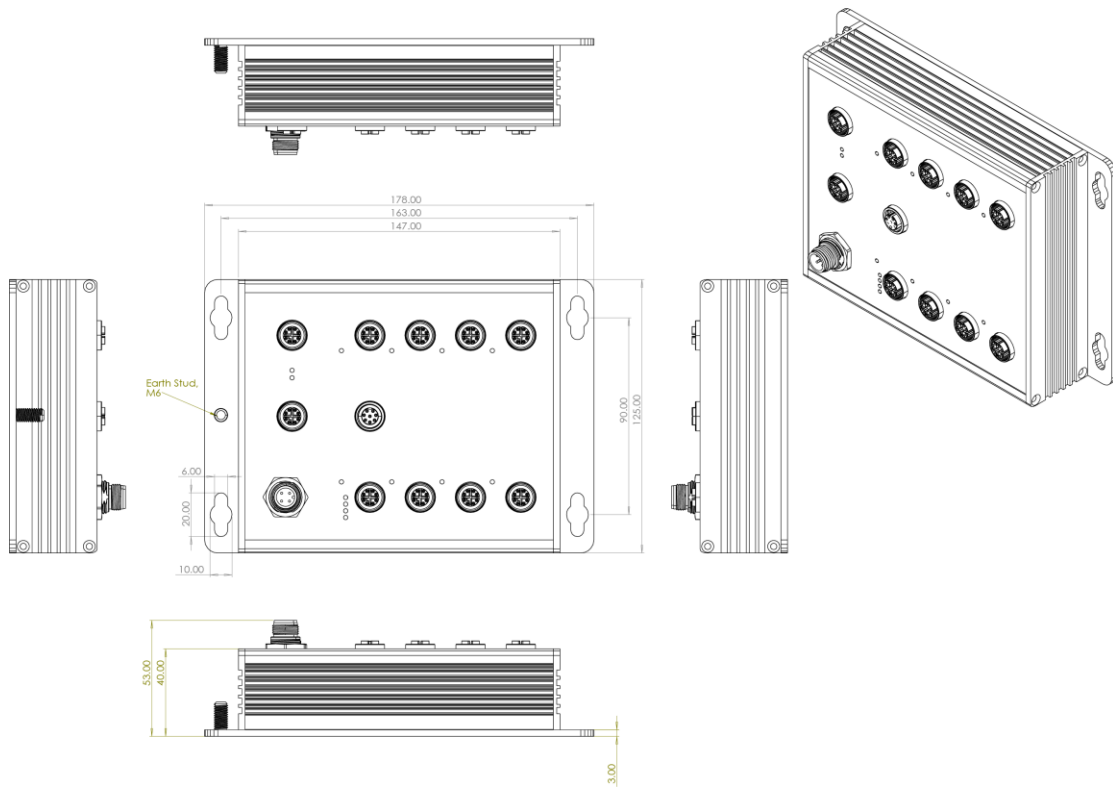

SPECIFICATIONS

Hardware Specification

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T Ethernet IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet (PoE model)	EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)
Switch Architecture	Back-plane (Switching Fabric): 20Gbps	LED
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) Ethernet port: Link/Activity (Green), Speed (Amber) PoE: Link/Act (Green);
Mac Address	16K MAC address table	Operating Humidity
Jumbo frame	10KB	Operating Temperature
Connectors	10/100/1000T: 9 x M12 8-pole X-coded 10/100/1000T 1x router/LAN configurable (port#9) Power Input connector: 1 x M12 4-pole Male A-coded Reset/Console/USB: 1 x M12 8-pole A-code	Storage Temperature
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable	Power Supply
		PoE Budget
		PoE pin assignment
		Power Consumption
		Case Dimension
		Weight

	933g (Non-PoE model)
Installation	Wall Mount / Din Rail mount**
EMI & EMS	EN 55035: 2017/A11: 2020 EN 55032: 2015/A11: 2020 FCC Part 15, Subpart B ICES-003 Issue 7 IEC 61000-4-2: 2008 IEC 61000-4-3: 2020 IEC 61000-4-4: 2012 IEC 61000-4-5: 2014+AMD1: 2017 CSV IEC 61000-4-6: 2023 IEC 61000-4-8: 2009 IEC 61000-6-2: 2016 IEC 61000-6-4: 2018 EN IEC 61000-6-2: 2019 EN IEC 61000-6-4: 2019 BS EN 55035: 2017+A11: 2020 BS EN 55032: 2015+A11: 2020
Verifications	EN 50155: 2021

	EN 50121-4: 2016/ A1: 2019 EN 50121-3-2: 2016/ A1: 2019 EN45545-1, EN 45545-2 Fire & Smoke
Stability Testing	EN 61373: 2010 (Shock and Vibration)
Vehicle Certificate	E24 marking (UN ECE R10) ITxPT labeled*
MTBF	320,928 hrs
Warranty	5 years
Bypass**	One pair bypass module on uplink ports to pass to next switch in case of power failure and CPU hang (-BT model) (only for 24TVI models)

Software Specification

Lantech OS2PRO Platform
Download Software Datasheet

[https://www.lantechcom.tw/global/eng/download/datasheet/D-](https://www.lantechcom.tw/global/eng/download/datasheet/D-OS2PRO.pdf)

[OS2PRO.pdf](#)

*Future release
**Optional

ORDERING INFORMATION

All model packages include M12 caps. For coating add -C to model name; for optional bypass add -BT (one pair) to end of model names. (only for 24TVI models)

- **TPGR-3208T-54-24VI-E P/N: 8351-140**
10 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/PoE & Ethernet galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP54 rated
- **TPGR-3208T-54-24VI-IGN-EP/N: 8351-1401**
10 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/PoE & Ethernet galvanic isolation & ignition; 9~36VDC dual input; -40°C to 70°C; IP54 rated
- **TPGR-3208T-54-24TVI P/N: 8351-1402**
10 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/PoE & Ethernet galvanic isolation; 16.8~56VDC dual input; -40°C to 70°C; IP54 rated
- **TGR-3208T-54-24VI-E P/N: 8351-1403**
10 10/100/1000T L2+ NAT router Switch w/Ethernet galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP54 rated
- **TGR-3208T-54-24VI-IGN-EP/N: 8351-1404**
10 10/100/1000T L2+ NAT router Switch w/Ethernet galvanic isolation & ignition; 9~36VDC dual input; -40°C to 70°C; IP54 rated
- **TGR-3208T-54-24TVI P/N: 8351-1405**
10 10/100/1000T L2+ NAT router Switch w/Ethernet galvanic isolation; 16.8~56VDC dual input; -40°C to 70°C; IP54 rated
- **TPGR-3208T-54-24VI P/N: 8351-1406**
10 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/PoE & Ethernet galvanic isolation; 9~36VDC dual input; -20°C to 60°C; IP54 rated
- **TPGR-3208T-54-24VI-IGNP/N: 8351-1407**
10 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/PoE & Ethernet galvanic isolation & ignition; 9~36VDC dual input; -20°C to 60°C; IP54 rated
- **TGR-3208T-54-24VI P/N: 8351-1408**
10 10/100/1000T L2+ NAT router Switch w/Ethernet galvanic isolation; 9~36VDC dual input; -20°C to 60°C; IP54 rated
- **TGR-3208T-54-24VI-IGNP/N: 8351-1409**
10 10/100/1000T L2+ NAT router Switch w/Ethernet galvanic isolation & ignition; 9~36VDC dual input; -20°C to 60°C; IP54 rated
- **TPGR-3208T-67-24VI-E P/N: 8351-14001**
10 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/ PoE galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP67 rated
- **TPGR-3208T-67-24VI-IGN-EP/N: 8351-14011**
10 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/ PoE galvanic isolation & ignition; 9~36VDC dual input; -40°C to 70°C; IP67 rated
- **TPGR-3208T-67-24TVI P/N: 8351-14021**
10 10/100/1000T w/8 PoE at/af L2+ NAT router Switch w/ PoE galvanic isolation; 16.8~56VDC dual input; -40°C to 70°C; IP67 rated
- **TGR-3208T-67-24VI-E P/N: 8351-14031**

- 10 10/100/1000T L2+ NAT router Switch w/ galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP67 rated
TGR-3208T-67-24VI-IGN-EP/N: 8351-14041
- 10 10/100/1000T L2+ NAT router Switch w/ galvanic isolation & ignition; 9~36VDC dual input; -40°C to 70°C; IP67 rated

OPTIONAL ACCESSORIES

Software package

Please refer to the software datasheet (<https://www.lantechcom.tw/global/eng/download/datasheet/D-OS5.pdf>)

M12 Connector & Cable

Connector

- **ECONM12-04D(M)-C-180** 4 pin M12 (Male) D-coded 180 degree crimp type connector for data
- **ECONM12-08X(M)-SPEEDCON** 8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON

Cable

- **ECAB124030MJS** 4 pin M12 (Male) D-coded 180 degree RJ45 STP cable for data, 300cm
- **ECABM12X83MSTP** 8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm
- **ECONM12-4P(F)1.5M CABLE** 4 pin M12 (Female) A-coded 90 degree cable for power supply, 150cm
- **ECONM12-08M2-CONSOLE** 8 pin M12 (Male) A-coded 180 degree to RS232 cable for console, 150cm

Lantech Communications Global Inc.
www.lantechcom.tw
info@lantechcom.tw

© 2025 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 24 APR 2025
 The revise authority rights of product specifications belong to Lantech Communications Global Inc.
 In a continuing effort to improve and advance technology, product specifications are subject to change without notice.