

T(P)GS-L5408MGFTR

8 10/100/1000T + 2 1G/2.5G Copper + 2 1G/2.5G Q-ODC Fiber OM3 (w/8 PoE

at/af) EN50155 Managed Ethernet Switch w/ enhanced G.8032 Ring, PXE,

WVI input

- Total 8 10/100/1000T + 2 1G/2.5G Copper + 2 1G/2.5G Q-ODC OM3 SR/LR Fiber Ethernet Switch
- PoE model: w/8 PoE ports
- EN50155/61373/45545-2 verification
- PoE model: Support IEEE802.3at/af up to 30W per port PoE management incl. Detection and Scheduling
- Support PXE to verify switch firmware with the latest or certain version on server
- Enhanced G.8032 ring protection < 20ms for single ring. Supports enhanced mode and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 8 MSTI /RSTP; support MRP ring
- Miss-wiring avoidance & node failure protection
- Inrush current protection
- User friendly UI, including auto topology drawing; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, MLD snooping, DHCP server & DHCP Option82; Port based DHCP distribution, DHCP Snooping, Mac based DHCP server, SSH v2/SSL, HTTPS, INGRESS ACL L2/L3, TACACS+, QinQ, QoS by VLAN
- Protocol based VLAN; IPv4 Subnet based VLAN
- Enhanced environmental Monitoring for temp., actual input voltage, current & total power load
- IP41 aluminum enclosure
- Optional L3Lite or IEC 61375-2-5 TBN features to be upgradable
- USB port to upload & download the configuration file
- Optional smart bypass in case of power failure, CPU hang (One pair Copper)
- Dual power input 16.8V~137.5V with galvanic isolation between input power, PoE and system
- Factory reset pin to restore factory default setting
- Wide range operation temperature: -40~70C/-40~158F



OVERVIEW

Lantech T(P)GS-L5408MGFTR is a high performance OS3 full Gigabit Ethernet switch with 8 10/100/1000T + 2 1G/2.5G Copper + 2 1G/2.5G SR/LR Fiber Q-ODC OM3. PoE model has 8 PoE 802.3at/af ports which provides advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring while also supports enhanced mode with easy configuration. The comprehensive QoS, advanced security including INGRESS ACL L2/L3, TACACS+, SSH v2/SSL and Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port are supported and also required in large network. It also supports 10K Jumbo frames.

Dual WVI input with max PoE budget and Inrush current protection

The T(P)GS-L5408MGFTR WVI model accepts 16.8~137.5VDC dual input with galvanic isolation and PoE model can feed 54V output for PoE feeding with 100W budget. The inrush current on initial power up can be limited lower than 10 x nominal current.

Up to 8 PoE at/af ports w/advanced PoE management

Compliant with 802.3at/af standard, the Lantech TPGS-

L5408MGFTR is able to feed each PoE port up to 30 Watt at each PoE port for various IP PD devices. Lantech TPGS-L5408MGFTR supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Each PoE ports can be Enabled/disabled, get the voltage, current, Watt, and temperature info displayed on WebUI.

Miss-wiring avoidance, Loop protection, Node failure protection

The T(P)GS-L5408MGFTR also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech T(P)GS-L5408MGFTR is able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

Support PXE to verify switch firmware with latest or certain version

The switch can check its firmware version during booting time via PXE protocol. If switch finds any newer version, it will upload automatically.

Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN

Lantech OS3 Ethernet switches comply with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (TBN).

Enhanced Storm control

Storm control prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces and the detection is more precise and reaction is more efficient.

Optional L3Lite/L3*/ETBN to be upgradable

Lantech OS3 are optional upgradable to L3 Lite/ L3* or ETBN communication protocols for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter- VLAN routing. Optional ETBN complies with IEC61375-2-5 ETBN for Train Backbone Network.

QinQ, QoS and GVRP supported

It supports the QinQ, QoS and GVRP for large VLAN segmentation.

Protocol based VLAN; Subnet based VLAN

The protocol-based VLAN processes traffic based on protocol. It filters IP traffic from nearby end-stations using a particular protocol such as IP, IPX, ARP or other Ethernet-types in a Hex value. Subnet based VLANs group traffics into logical VLANs based on the source IP address and IP subnet.

The above features can help to build VLAN in the network mixed with managed and un-managed switch as to define packets to which VLAN group based on protocol or subnet.

DHCP option 82 & Port based, Mac based DHCP, Option66, DHCP Snooping, IPv6 DHCP server

DHCP server can assign dedicated IP address by MAC or by

port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Snooping is supported. DHCP Option66 server can offer IP address of TFTP server to DHCP client for VOIP application. Basic IPv6 DHCP service can be supported.

User friendly GUI, Auto topology drawing

The user-friendly UI, innovative auto topology drawing and topology demo makes T(P)GS-L5408MGFTR much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line.

Enhanced G.8032 ring; 8 MSTI MSTP; MRP ring

Lantech T(P)GS-L5408MGFTR features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering Multicast packets. It also supports various ring topologies that covers enhanced ring and basic ring by easy setup than others. It supports MSTP that allows each spanning tree for each VLAN for redundant links with 8 MSTI.

MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

IGMPv3, MLD Snooping, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, MLD Snooping, GMRP, router port, MLD snooping and static multicast forwarding binding by ports for video surveillance application.

802.1X security by MAC address

MAC-based port authentication is an alternative approach to 802.1x for authenticating hosts connected to a port. By authenticating based on the host's source MAC address, the host is not required to run a user for the 802.1x protocol. The RADIUS server that performs the authentication will inform the switch if this MAC can be registered in the MAC address table of switch.

Event log & message; 2DI + 2DO; Factory default pin

T(P)GS-L5408MGFTR provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the outside alarm and switch will send alert information to IP network with email and traps.

The factory reset pin can restore the setting back to factory default.

Editable configuration file; USB port for upload/download configuration

The configuration file of Lantech T(P)GS-L5408MGFTR can be exported and edited with word processor for the following switches to configure with ease.

The USB port can upload/download the configuration from/to USB dongle.

Enhanced environmental monitoring for switch inside information

The enhanced environmental monitoring can detect switch overall temperature, total power load, actual input voltage and current. It also can send the SNMP traps alert when abnormal.

Optional smart bypass protection on cooper ports (one pair)

The bypass relay is set to bypass the switch to the next one when power is off to prevent network disruption. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. Optional smart bypass can be activated when switch encounters power failure or CPU fail. (-BT model)


EN50155, EN45545-2, EN61373 verification; High ESD protection

T(P)GS-L5408MGFTR passed serious tests under extensive Industrial EMI and Safety standards. With EN45545-2 Fire & Smoke and EN50155 verification, the T(P)GS-L5408MGFTR is the best switch for railway on-board/track side, vehicle and mining applications. For more usage flexibilities, T(P)GS-L5408MGFTR supports wide operating temperature from -40°C to 70°C. (85°C operation for 10min.)

FEATURES & BENEFITS

- 8 10/100/1000T + 2 1G/2.5G Copper + 2 1G/2.5G SR/LR Fiber Q-ODC OM3 (Total 12 Ports Switch)
- PoE model: w/8 PoE 802.3af/at ports EN50155 Managed Ethernet Switch to feed power up to 30W for active mode operation (max 100W budget)
- EN45545-2 Fire & Smoke, EN50155 and EN61373 shock/vibration verification
- Galvanic isolation from power input/Ethernet ports to system 1.5KV
- PoE model: PoE management including PoE detection and scheduling, pre-set power feeding schedule, remote enable/disable
- Wide dual power input voltage ranges from 16.8~137.5VDC with galvanic isolation
- Inrush current limited protection
- Back-plane (Switching Fabric): 36Gbps
- 16K MAC address table
- 10KB Jumbo frame
- User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting
- Enhanced G.8032 Ring protection in 20ms for single ring
 - Support various ring/chain topologies, including enhanced ring & basic ring
 - Enhanced G.8032 ring configuration with ease
 - Cover multicast and data packets protection
- Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority
- IEEE 802.1d STP, IEEE 802.1w RSTP, 802.1s MSTP VLAN redundancy with 8 MSTI
- 4K 802.1Q VLAN, Port based VLAN, GVRP, QoS, QinQ
- Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console
- DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server; Port based DHCP server; DHCP Option 66; DHCP Snooping, basic IPv6 DHCP server
- Mac based DHCP server to assign IP address that includes dumb switches in DHCP network
- Bandwidth Control
 - Ingress packet filter and egress* rate limit
 - Broadcast/multicast packet filter control
- Miss-wiring avoidance
 - LED indicator
- TFTP/HTTP firmware upgrade
- System Event Log, SMTP** Email alert and SNMP Trap for alarm support ; 32 RMON counters
- Security
 - SSL/SSH v2/INGRESS ACL L2/L3
 - MAC address table: MAC address entries/Filter/MAC-Port binding
 - Remote Admin: IP address security management to prevent unauthorized intruder.
 - TACACS+
 - Login Security: IEEE802.1X/RADIUS
 - HTTPS for secure access to the web interface
- Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
- IGMP router port for Multicast protection
- IGMPv1,v2,v3 with Query mode for multi media
- MLD Snooping for IPv6 Multicast stream
- Dual image firmware support
- Watchdog design to auto reboot switch CPU is found dead
- Built-in enhanced environmental monitoring for temperature, system actual input voltage, current and total power load
- Supports 2DI + 2DO (Digital Input/Digital Output)
- IP41 aluminum alloy housing with Rack mount design
- Configuration backup and restoration
 - Supports editable configuration file for system quick installation
- Support PXE to verify switch firmware with the latest or certain version
- Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN
- Wide operation temperature: -40~70C/-40~158F (85°C operation for 10min.)
- Diagnostic including Ping / ARP table / DDM information
- Enhanced Storm Control
- Optional L3Lite/L3*/ETBN to be upgradable
- Optional smart bypass (One pair) (-BT model)

DIMENSIONS (unit=mm)

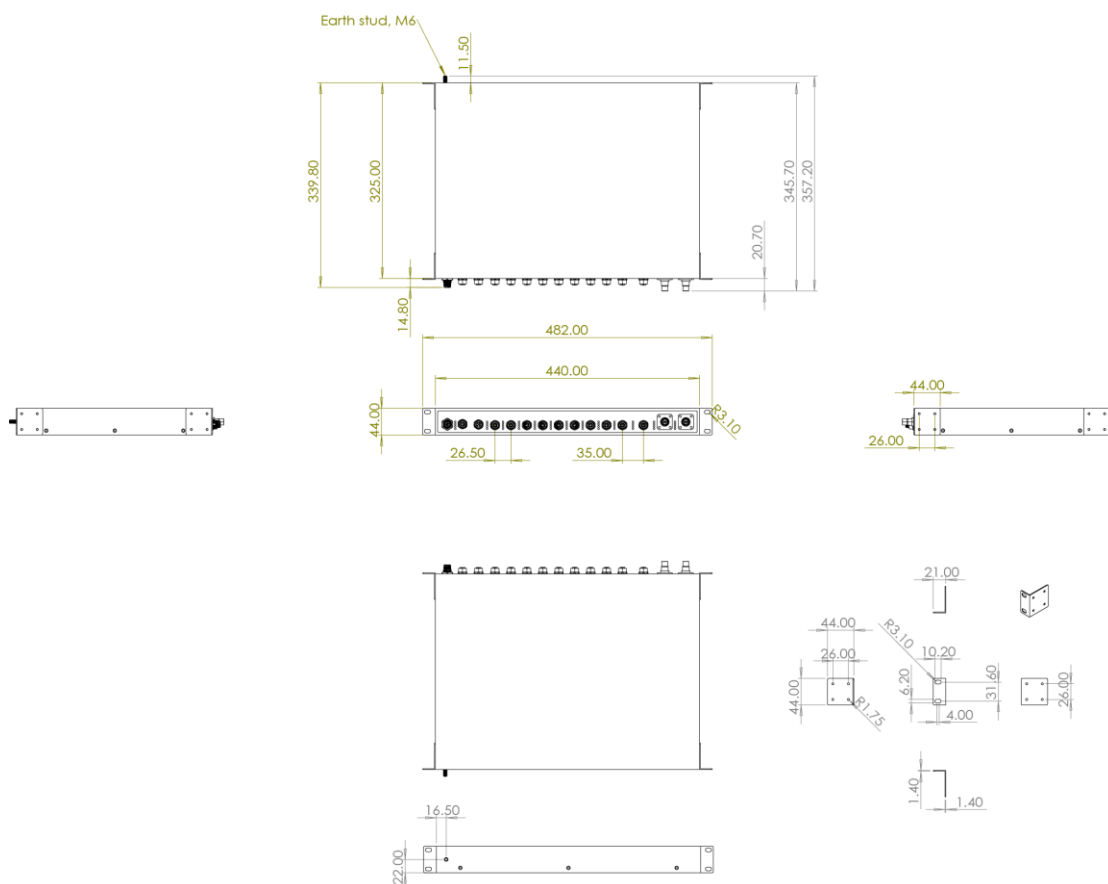

SPECIFICATION

Hardware Specification

| | | |
|---------------------|---|--|
| Standards | IEEE 802.3-2018 10Base-T Ethernet IEEE 802.3u-1995 100Base-TX IEEE802.3ab-1999 1000Base-T IEEE802.3x-1997 Flow Control and Back Pressure IEEE802.3ad-2000 Port trunk with LACP IEEE802.1d-1998 Spanning Tree IEEE802.1w-2001 Rapid Spanning Tree IEEE802.1s-2002 Multiple Spanning Tree IEEE 802.1AB-2009 Link Layer Discovery Protocol (LLDP) IEEE 802.1X-2004 User Authentication (Radius) IEEE802.1p (published in 802.1D-1998) Class of Service IEEE802.1Q-2003 VLAN Tag IEEE802.3at-2009/af-2003 Power over Ethernet | Reset/Console/USB: 1 x M12 8-pole Female A-coded DIDO: 1 x M12 5-pole Female A-coded |
| Switch Architecture | Back-plane (Switching Fabric): 36Gbps | Network Cable |
| Transfer Rate | 14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port | 100Base-TX: 2-pair STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) |
| Mac Address | 16K MAC address table | LED |
| Jumbo frame | 10KB | Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red) 10/100/1000T Ethernet port: Link/Activity (Green), Speed (Green); R.M. indicator (Green) PoE: Link/Act (Green) (PoE model) 1G/2.5G copper: Link/Act (Yellow) 1G/2.5G fiber: Link/Act (Orange) |
| Connectors | 10/100/1000T: 8 x ports M12 8-pole X-coded with Auto MDI/MDI-X function 1G/2.5G Copper: 2 x ports M12 8-pole X-coded with Auto MDI/MDI-X function 1G/2.5G FX: 2x ports Q-ODC OM3 with multi-mode/single-mode Fiber Power Input connector: 1 x M12 4-pole Male S-coded | DI/DO |
| | | 2 Digital Input (DI): Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output (DO): Open collector to 80 VDC, 50mA |
| | | Operating Humidity |
| | | 5% ~ 95% (Non-condensing) |
| | | Operating Temperature |
| | | -40°C~70°C / -40°F~158°F (85°C operation for 10min.) |
| | | Storage Temperature |
| | | -40°C~85°C / -40°F~185°F |
| | | Power Supply |
| | | Dual DC input, 16.8VDC~137.5VDC |
| | | PoE Budget (PoE model) |
| | | 100W Higher PoE budget can be applied upon request. ** |
| | | PoE pin assignment (PoE) |
| | | M12 port #1~#8; support IEEE 802.3at/af Endpoint, Alternative A mode |

| | |
|---------------------------------|---|
| model) | |
| Power Consumption | Max. 35.9W exclude PoE load |
| Dimensions | IP41 Aluminum alloy case 440mm(W)x44mm(H)x357.2mm(D) |
| Weight | 2.9 kgs |
| Installation | 1U Rack mount design |
| EMI & EMS | FCC Part 15 Class A, IEC/EN61000-6-2 IEC/EN61000-6-4 CE EN55032 Class A CE EN55024 CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE EN61000-4-8 (Magnetic field) Level 3 BS EN61000-4-2, BS EN61000-4-3, BS EN61000-4-4, BS EN61000-4-5, BS EN61000-4-6, BS EN61000-4-8, BS EN55032, BS EN55024 |
| Stability Testing | EN61373:2010 (Shock and Vibration) |
| MTBF | TBC (standards: IEC 62380) |
| Verifications & report | EN50155:2017/EN50121-3-2:2016+A1:2019; EN50121-4:2016+A1:2019/EN50125-1:2014; EN50343:2014+A1:2017 EN 60077-1:2017/EN50124-1:2017; EN45545-1, EN 45545-2 Fire & Smoke verification |
| Warranty | 5 years |
| Bypass** | one pair copper bypass module on uplink copper ports to pass to next switch in case of power failure and CPU fail |
| Software Specification | |
| Management | SNMP v1 v2c, v3/ Web/Telnet/CLI |
| SNMP MIB | RFC 1213 MIBII RFC 1158 MIB RFC 1157 SNMP MIB, RFC 1493 Bridge MIB* RFC 1573 IF MIB RFC 2674 Q-Bridge MIB* RFC 2819 RMON MIB Private MIB |
| ITU G.8032 | Support ITU G.8032 for Ring protection in less than 20ms for self-heal recovery (basic mode) Support basic single ring & enhanced ring Enhanced G.8032 ring configuration with ease Ring covers multicast on different ports |
| PoE Management (PoE model) | 1. PoE Detection to check if PD hangs then restart the PD 2. PoE Scheduling to On/OFF PD upon routine time table |
| Per Port PoE Status (PoE model) | On/ Off, voltage, current, watts, temperature |
| IEC 61375-3-4 standard | <ul style="list-style-type: none"> ■ Support Linear Topology · Linear Topology with Dual Homing · Ring Topology · Ring Topology with Dual Homing and Ladder Topology with Dual Homing. ■ Switch IP address support Consist network address definitions. ■ Set traffic priority with Supervisor/Message/Stream/Process/Best Effort in consist network. |
| User friendly UI | <ul style="list-style-type: none"> ■ Auto topology drawing ■ Topology demo ■ Complete CLI for professional setting |
| Port Trunk with LACP | LACP Port Trunk: 8 Trunk groups/Maximum 8 trunk members |
| LLDP | Supports LLDP to allow switch to advise its |

| | |
|-----------------------------------|---|
| | identification and capability on the LAN |
| CDP | Cisco Discovery Protocol for topology mapping |
| Enhanced Environmental Monitoring | System status for actual input voltage, current, total power load and ambient temperature to be shown in GUI and sent alerting if any abnormal status |
| VLAN | Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096) GVRP, QinQ, QoS Protocol based VLAN IPv4 Subnet based VLAN |
| Spanning Tree | Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 8 MSTI |
| Quality of Service | The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP |
| Class of Service | Support IEEE802.1p class of service, per port provides 8 priority queues |
| Remote Admin | Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. |
| Login Security | Supports IEEE802.1X Authentication/RADIUS |
| Port Mirror | Support 3 mirroring types: "RX, TX and Both packet" |
| Network Security | Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/MAC-Port binding Ingress ACL L2/L3 SSL/SSH v2 for Management HTTPS for secure access to the web interface TACACS+ for Authentication |
| IGMP | Support IGMP snooping v1, v2, v3; Supports IGMP static route; 1024 multicast groups; IGMP router port; IGMP query; GMRP |
| MLD Snooping | Support IPv6 Multicast stream |
| Static MAC-Port bridge | Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application |
| Bandwidth Control | Support ingress packet filter and egress* packet limit. The egress* rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress* packet limit. |
| Flow Control | Supports Flow Control for Full-duplex and Back Pressure for Half-duplex |
| System Log | Supports System log record and remote system log server |
| SMTP** | Supports SMTP** Server and 8 e-mail accounts for receiving event alert |
| Protection | <ul style="list-style-type: none"> ■ Miss-wiring avoidance ■ Node failure protection ■ Loop protection |
| SNMP Trap | Up to 5 trap stations; trap types including: <ul style="list-style-type: none"> ● Device cold start ● Authorization failure ● Port link up/link down ● DI/DO open/close ● Typology change (ITU ring) ● Power failure ● Environmental abnormal |
| PXE | PXE to verify switch firmware with the latest or certain version |
| DHCP | Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based DHCP; DHCP Snooping, DHCP Option 66; basic IPv6 DHCP server |

| | |
|----------------------------|---|
| Mac based DHCP Server | Assign IP address by Mac that can include dumb switch in DHCP network |
| DNS | Provide both DNS server and DNS client |
| NTP | Provide both NTP server and NTP client |
| Firmware Update | Supports TFTP/FTP firmware update, TFTP backup and restore; HTTP firmware upgrade |
| Enhanced Storm Control | prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces |
| ECN | Complies with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (TBN). |
| Optional L3Lite/L3*/ETBN** | Lantech OS3 are optional upgradable to L3 Lite/L3* or ETBN communication protocols for future expansion. The optional L3Lite includes editable |

| | |
|-----------------------------------|--|
| | routing table, VRRP, Router-on-a-stick, Inter-VLAN routing. Optional ETBN complies with IEC61375-2-5 ETBN for Train Backbone Network. Detail SPEC upon request. |
| Dual Image Firmware | Support dual image firmware function |
| Diagnostic | Support Ping, ARP table and DDM information |
| Configuration upload and download | Supports editable configuration file for system quick installation |

*Future release
**Optional

ORDERING INFORMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model name. For one pair bypass add -BT to model name.

- **TPGS-L5408MGFTR-8-QMM-41-WVI.....P/N: 8361-004**
8 10/100/1000T PoE at/af up to 30W + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8V~137.5V dual input ; IP41 Rack mount design ; -40°C to 70°C ; w/ PoE galvanic isolation
- **TPGS-L5408MGFTR-8-QSM-41-WVI.....P/N: 8361-0041**
8 10/100/1000T PoE at/af up to 30W + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 up to 40KM ; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8V~137.5V dual input ; IP41 Rack mount design ; -40°C to 70°C ; w/ PoE galvanic isolation
- **TGS-L5408MGFTR-QMM-41-WVI.....P/N: 8361-0042**
8 10/100/1000T + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; EN50155 OS3 Managed Ethernet Switch ; 16.8V~137.5V dual input ; IP41 Rack mount design ; -40°C to 70°C ; w/ galvanic isolation
- **TGS-L5408MGFTR-QSM-41-WVI.....P/N: 8361-0043**
8 10/100/1000T + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 up to 40KM ; EN50155 OS3 Managed Ethernet Switch ; 16.8V~137.5V dual input ; IP41 Rack mount design ; -40°C to 70°C ; w/ galvanic isolation

OPTIONAL ACCESSORIES

Software package

- **OS3 – L3L P/N: 9000-114**
OS3 software platform with Layer 3 Lite functions (please check Lantech software data sheet for details)
- **OS3 – IEC61375-2-5 P/N: 9000-115**
OS3 software platform with IEC-61375-2-5 ETBN (Ethernet Train Backbone Networks) function (please check Lantech software data sheet for details)
- **OS3 – L3* P/N: 9000-116**
OS3 software platform with Layer 3 functions incl. L3L (please check Lantech software data sheet for details)

M12 Connector & Cable

Connector

- **ECONM12-08A(M)-180** 8 pin M12 (Male) A-coded 180 degree crimp type connector for reset/console/USB
- **ECONM12-05A(M)-C-180** 5 pin M12 (Male) A-coded 180 degree crimp type connector for DI/DO
- **ECONM12-08X(M)-SPEEDCON** 8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON

Cable

- **ECONM12-SCODE(F)70CM** 4 pin M12 (Female) S-coded 90 degree cable for power supply, 70cm
- **ECONM12-08M2-CONSOLE** 8 pin M12 (Male) A-coded 180 degree to RS232 cable for console, 150cm
- **ECABM002-QOP2-3.0-MM-OM3** Q-ODC 2 plug/LC multi-mode fiber, MM-OM3, 300cm
- **ECABM002-QOP2-3.0-SM-OS2** Q-ODC 2 plug/LC single-mode fiber, SM-OS2, 300cm

Others

- **M12 to USB interface adapter** 8 pin M12 (Male) A-coded 180 degree M12 to USB 2.0 interface adapter, 8cm
- **USB 2.0 Ethernet Adapter** USB 2.0 to RJ45 Ethernet Adapter
- **ECONM12-08(M) TO DB9+USB2.0-1.5M CABLE** 8 pin M12 (Male) A-coded 180 degree M12 to USB2.0 to DB9 (Female) cable, 150cm

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2022 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.